

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P759645

Luminaire Tested: LD6D08D010-EU6DR600210IC9030-6LBDP1H

Issue Date: 2/5/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P759645  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-57)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/5/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D08D010-EU6DR600210IC9030-6LBDP1H  
Description: 6 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 60° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 779.7 lumens  
Efficiency: N/A  
Efficacy: 87.6 lumens/watt  
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.83  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 8.9  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P759645

CATALOG NUMBER: LD6D08D010-EU6DR600210IC9030-6LBDP1H

### Luminous Intensity Polar Plot

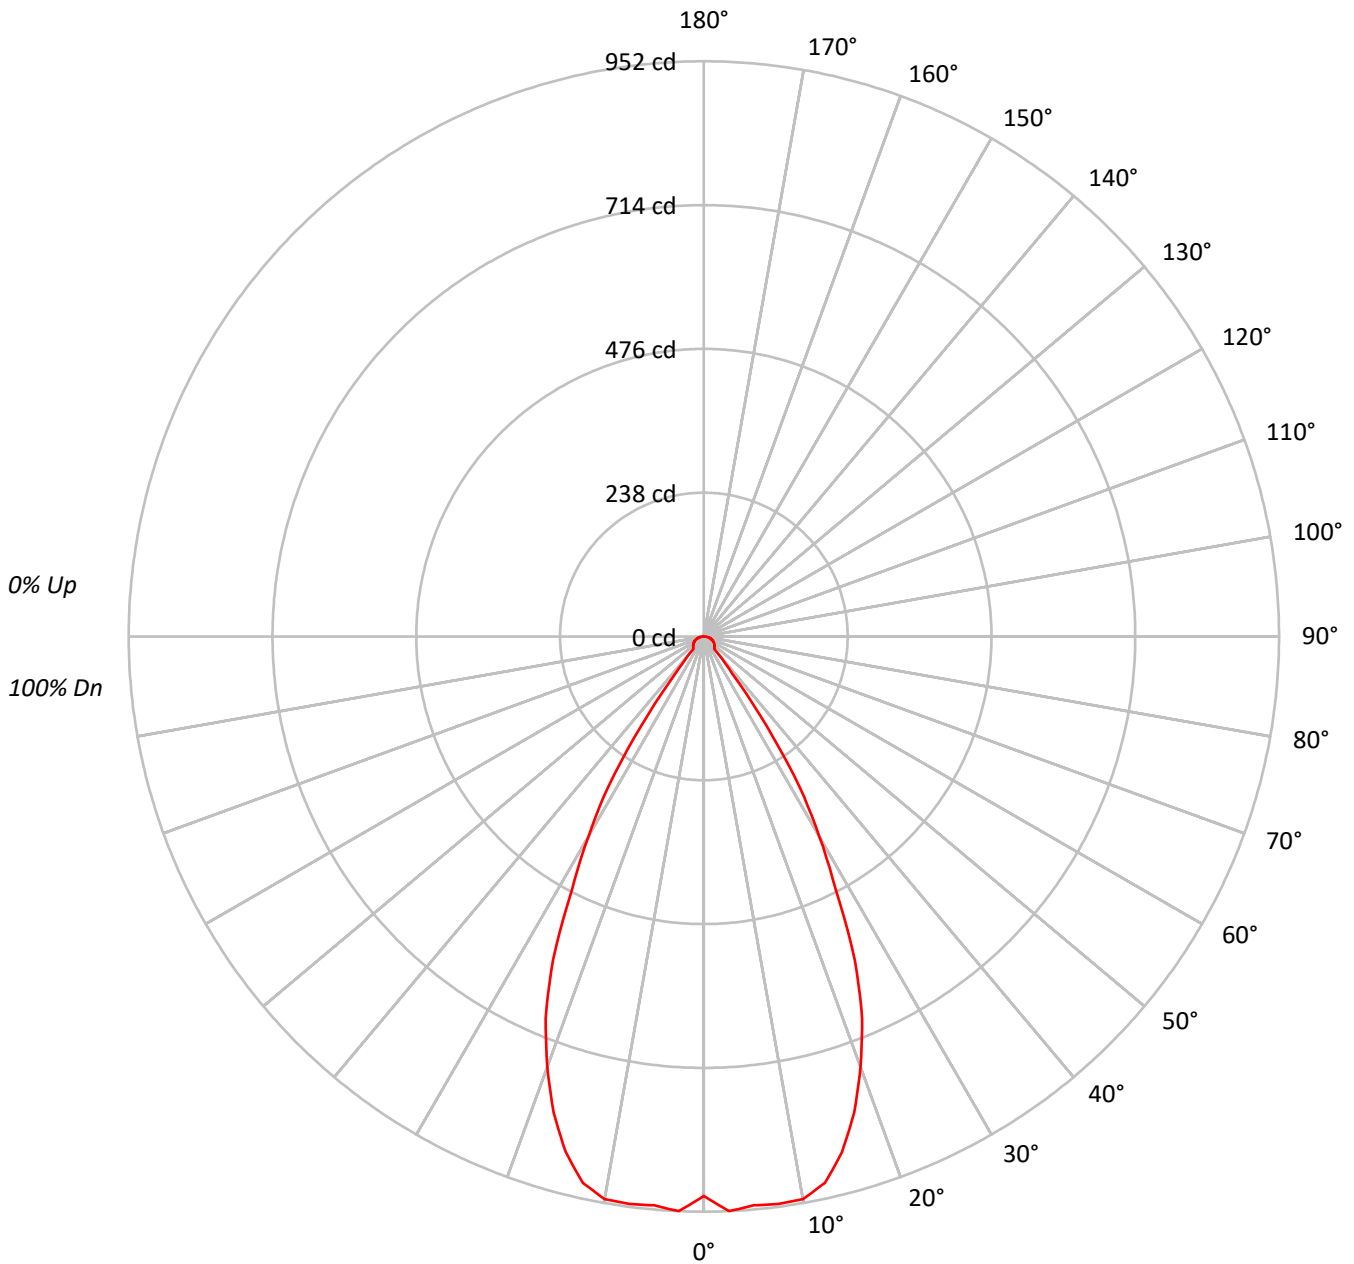



TEST NUMBER: P759645

CATALOG NUMBER: LD6D08D010-EU6DR600210IC9030-6LBDP1H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93			93																
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86			86																
3	102	96	90	86	100	94	89	86	91	88	84	89	86	83	87	84	82	80			80																
4	97	89	84	80	95	88	83	79	86	82	78	84	80	77	82	79	76	75			75																
5	92	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70			70																
6	88	79	73	69	87	78	73	69	77	72	68	75	71	68	74	70	67	66			66																
7	84	75	69	65	83	74	68	64	73	68	64	72	67	64	71	67	63	62			62																
8	80	71	65	61	79	70	65	61	69	64	60	68	64	60	67	63	60	59			59																
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55			55																
10	73	64	58	54	72	63	58	54	62	58	54	62	57	54	61	57	54	53			53																

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	101165
5°	103657
10°	104900
15°	99937
20°	88112
25°	71273
30°	48207
35°	24156
40°	3922
45°	3832
50°	3910
55°	3981
60°	4086
65°	4188
70°	4249
75°	4348
80°	4153
85°	3510

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 75°  
 Luminance: 4348 cd/sqm



TEST NUMBER: P759645

CATALOG NUMBER: LD6D08D010-EU6DR600210IC9030-6LBDP1H

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	90.3	11.6
10°-20°	244.4	31.3
20°-30°	262.9	33.7
30°-40°	114.3	14.7
40°-50°	19.2	2.5
50°-60°	18.7	2.4
60°-70°	16.0	2.0
70°-80°	10.7	1.4
80°-90°	3.2	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	597.7	76.7
0°-40°	711.9	91.3
0°-60°	749.8	96.2
0°-90°	779.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	779.7	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	926	
5°	945	90
15°	884	244
25°	591	263
35°	181	114
45°	25	19
55°	21	19
65°	16	16
75°	10	11
85°	3	3
90°	0	



TEST NUMBER: P759645

CATALOG NUMBER: LD6D08D010-EU6DR600210IC9030-6LBDP1H

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	925.9
2.5°	952.0
5°	945.1
7.5°	947.3
10°	945.5
12.5°	926.1
15°	883.5
17.5°	826.4
20°	757.8
22.5°	684.4
25°	591.2
27.5°	472.9
30°	382.1
32.5°	294.5
35°	181.1
37.5°	77.5
40°	27.5
42.5°	25.3
45°	24.8
47.5°	24.0
50°	23.0
52.5°	21.9
55°	20.9
57.5°	19.8
60°	18.7
62.5°	17.5
65°	16.2
67.5°	14.8
70°	13.3
72.5°	11.8
75°	10.3
77.5°	8.4
80°	6.6
82.5°	4.7
85°	2.8
87.5°	1.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)