

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P759729

Luminaire Tested: LD6D08D010-EU6DR650210IC9030-6LBS1MW

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P759729  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D08D010-EU6DR650210IC9030-6LBS1MW  
Description: 6 INCH ROUND SHALLOW MATTE WHITE TRIM, WITH 65° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 681.4 lumens  
Efficiency: N/A  
Efficacy: 76.6 lumens/watt  
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96  
Luminous Opening: Circular (Dia: 0.48' x H: 0')  
CIE Type: Direct

Input Watts (W): 8.9  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P759729

CATALOG NUMBER: LD6D08D010-EU6DR650210IC9030-6LBS1MW

### Luminous Intensity Polar Plot

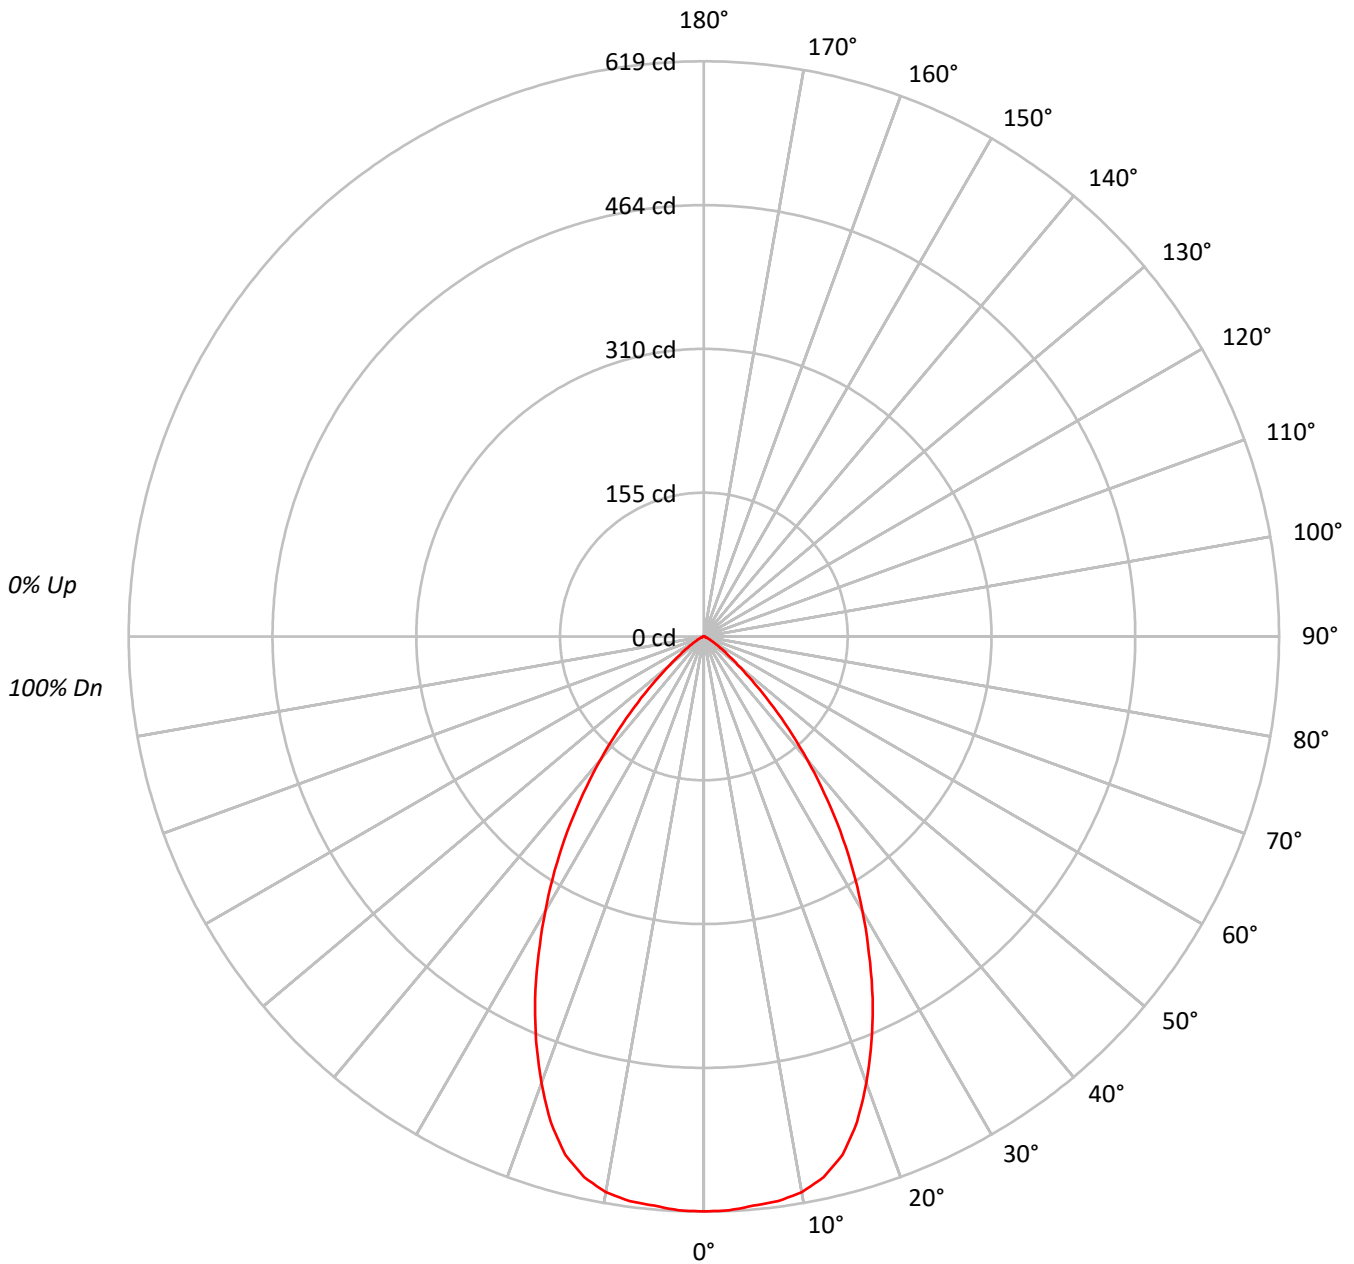



TEST NUMBER: P759729

CATALOG NUMBER: LD6D08D010-EU6DR650210IC9030-6LBS1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93	93	93	93
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85	85	85	85
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78	78	78	78
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72	72	72	72
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66	66	66	66
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61	61	61	61
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56	56	56	56
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52	52	52	52
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49	49	49	49
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46	46	46	46

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	36134
5°	36044
10°	36010
15°	34900
20°	31772
25°	27691
30°	23030
35°	18245
40°	13167
45°	8317
50°	4334
55°	2301
60°	1215
65°	663
70°	290
75°	316
80°	202
85°	201

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 8317 cd/sqm



TEST NUMBER: P759729

CATALOG NUMBER: LD6D08D010-EU6DR650210IC9030-6LBS1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	58.5	8.6
10°-20°	160.2	23.5
20°-30°	195.9	28.7
30°-40°	158.9	23.3
40°-50°	79.2	11.6
50°-60°	22.1	3.2
60°-70°	5.0	0.7
70°-80°	1.3	0.2
80°-90°	0.4	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	414.6	60.8
0°-40°	573.5	84.2
0°-60°	674.7	99.0
0°-90°	681.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	681.4	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	619	
5°	615	59
15°	577	160
25°	430	196
35°	256	159
45°	101	79
55°	23	22
65°	5	5
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P759729

CATALOG NUMBER: LD6D08D010-EU6DR650210IC9030-6LBS1MW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	618.7
2.5°	618.2
5°	614.8
7.5°	612.8
10°	607.2
12.5°	595.9
15°	577.2
17.5°	548.0
20°	511.2
22.5°	471.6
25°	429.7
27.5°	384.9
30°	341.5
32.5°	298.7
35°	255.9
37.5°	213.3
40°	172.7
42.5°	134.8
45°	100.7
47.5°	70.2
50°	47.7
52.5°	32.9
55°	22.6
57.5°	15.3
60°	10.4
62.5°	7.2
65°	4.8
67.5°	2.5
70°	1.7
72.5°	1.5
75°	1.4
77.5°	0.9
80°	0.6
82.5°	0.5
85°	0.3
87.5°	0.2
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)