

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P759802

Luminaire Tested: LD6D08D010-EU6DR700210IC9030-6LBDP1LI

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P759802
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-73)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D08D010-EU6DR700210IC9030-6LBDP1LI
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR CLEAR TRIM, WITH 70° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 824.0 lumens
Efficiency: N/A
Efficacy: 92.6 lumens/watt
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.82
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 8.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P759802

CATALOG NUMBER: LD6D08D010-EU6DR700210IC9030-6LBDP1LI

Luminous Intensity Polar Plot

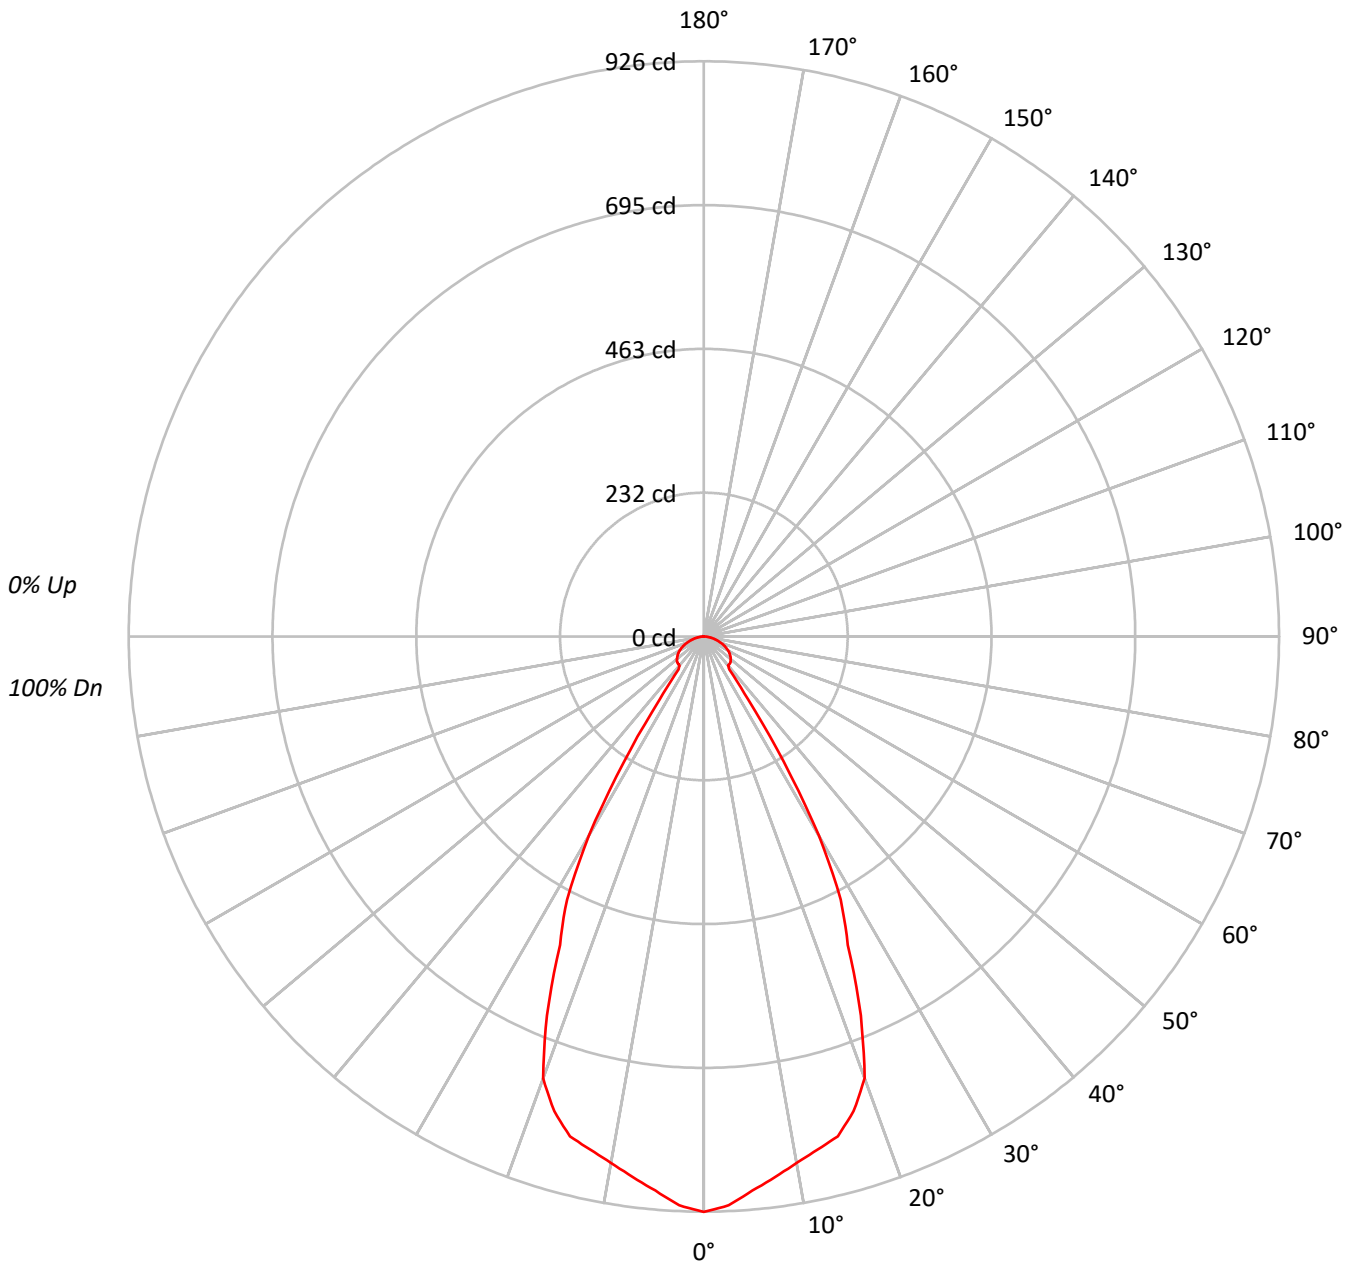



TEST NUMBER: P759802

CATALOG NUMBER: LD6D08D010-EU6DR700210IC9030-6LBDP1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|---|--|--|--|--|--|--|----|--|--|--|--|--|--|--|--|---|
| RF | 20 | | | | | | | | | 20 | | | | | | | | | 20 | | | | | | | | | 20 | | | | | | | | | |
| RC | 80 | | | | | | | | | 50 | | | | | | | | | 30 | | | | | | | | | 10 | | | | | | | | | 0 |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 | | | | | | | | | | | | | | | | |
| RCR | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 | | | | | | | | | | | | | | | | | | | |
| 1 | 112 | 109 | 106 | 103 | 110 | 107 | 104 | 102 | 103 | 101 | 99 | 99 | 97 | 96 | 95 | 94 | 93 | 91 | | | | | | | | | | | | | | | | | | | |
| 2 | 106 | 100 | 95 | 91 | 103 | 98 | 94 | 90 | 95 | 91 | 88 | 92 | 89 | 86 | 89 | 87 | 85 | 83 | | | | | | | | | | | | | | | | | | | |
| 3 | 100 | 92 | 87 | 82 | 98 | 91 | 86 | 81 | 88 | 84 | 80 | 86 | 82 | 79 | 83 | 80 | 78 | 76 | | | | | | | | | | | | | | | | | | | |
| 4 | 94 | 86 | 80 | 75 | 92 | 85 | 79 | 74 | 82 | 77 | 73 | 80 | 76 | 73 | 78 | 75 | 72 | 70 | | | | | | | | | | | | | | | | | | | |
| 5 | 89 | 80 | 74 | 69 | 87 | 79 | 73 | 69 | 77 | 72 | 68 | 75 | 71 | 67 | 74 | 70 | 67 | 65 | | | | | | | | | | | | | | | | | | | |
| 6 | 85 | 75 | 68 | 64 | 83 | 74 | 68 | 64 | 73 | 67 | 63 | 71 | 66 | 63 | 70 | 66 | 62 | 61 | | | | | | | | | | | | | | | | | | | |
| 7 | 80 | 70 | 64 | 59 | 79 | 70 | 64 | 59 | 68 | 63 | 59 | 67 | 62 | 59 | 66 | 62 | 58 | 57 | | | | | | | | | | | | | | | | | | | |
| 8 | 77 | 66 | 60 | 56 | 75 | 66 | 60 | 56 | 65 | 59 | 55 | 64 | 59 | 55 | 63 | 58 | 55 | 53 | | | | | | | | | | | | | | | | | | | |
| 9 | 73 | 63 | 57 | 52 | 72 | 62 | 56 | 52 | 61 | 56 | 52 | 60 | 55 | 52 | 60 | 55 | 52 | 50 | | | | | | | | | | | | | | | | | | | |
| 10 | 70 | 59 | 53 | 49 | 69 | 59 | 53 | 49 | 58 | 53 | 49 | 57 | 52 | 49 | 57 | 52 | 49 | 48 | | | | | | | | | | | | | | | | | | | |

AVERAGE LUMINANCE (cd/sqm):

| | |
|-----|--------|
| | 0° |
| 0° | 101219 |
| 5° | 98217 |
| 10° | 95469 |
| 15° | 94225 |
| 20° | 87984 |
| 25° | 66101 |
| 30° | 46731 |
| 35° | 16553 |
| 40° | 8700 |
| 45° | 9271 |
| 50° | 9604 |
| 55° | 9772 |
| 60° | 9833 |
| 65° | 9617 |
| 70° | 9105 |
| 75° | 8401 |
| 80° | 7488 |
| 85° | 6017 |

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 57.5°
 Luminance: 9842 cd/sqm



TEST NUMBER: P759802

CATALOG NUMBER: LD6D08D010-EU6DR700210IC9030-6LBDP1LI

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 84.5 | 10.3 |
| 10°-20° | 231.7 | 28.1 |
| 20°-30° | 255.2 | 31.0 |
| 30°-40° | 97.5 | 11.8 |
| 40°-50° | 46.0 | 5.6 |
| 50°-60° | 45.8 | 5.6 |
| 60°-70° | 36.6 | 4.4 |
| 70°-80° | 21.1 | 2.6 |
| 80°-90° | 5.7 | 0.7 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 571.3 | 69.3 |
| 0°-40° | 668.8 | 81.2 |
| 0°-60° | 760.6 | 92.3 |
| 0°-90° | 824.0 | 100.0 |
| 90°-120° | 0.0 | 0.0 |
| 90°-150° | 0.0 | 0.0 |
| 90°-180° | 0.0 | 0.0 |
| 0°-180° | 824.0 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|-----|-----|------|
| 0° | 926 | |
| 5° | 896 | 84 |
| 15° | 833 | 232 |
| 25° | 548 | 255 |
| 35° | 124 | 97 |
| 45° | 60 | 46 |
| 55° | 51 | 46 |
| 65° | 37 | 37 |
| 75° | 20 | 21 |
| 85° | 5 | 6 |
| 90° | 0 | |



TEST NUMBER: P759802

CATALOG NUMBER: LD6D08D010-EU6DR700210IC9030-6LBDP1LI

CANDELA DISTRIBUTION (FULL):

| | 0° |
|-------|-------|
| 0° | 926.4 |
| 2.5° | 916.7 |
| 5° | 895.5 |
| 7.5° | 877.7 |
| 10° | 860.5 |
| 12.5° | 846.0 |
| 15° | 833.0 |
| 17.5° | 801.4 |
| 20° | 756.7 |
| 22.5° | 660.2 |
| 25° | 548.3 |
| 27.5° | 477.3 |
| 30° | 370.4 |
| 32.5° | 239.2 |
| 35° | 124.1 |
| 37.5° | 67.0 |
| 40° | 61.0 |
| 42.5° | 60.6 |
| 45° | 60.0 |
| 47.5° | 58.7 |
| 50° | 56.5 |
| 52.5° | 54.0 |
| 55° | 51.3 |
| 57.5° | 48.4 |
| 60° | 45.0 |
| 62.5° | 41.2 |
| 65° | 37.2 |
| 67.5° | 32.8 |
| 70° | 28.5 |
| 72.5° | 24.1 |
| 75° | 19.9 |
| 77.5° | 15.7 |
| 80° | 11.9 |
| 82.5° | 8.4 |
| 85° | 4.8 |
| 87.5° | 1.9 |
| 90° | 0.0 |

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)