

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P759658

Luminaire Tested: LD6D08D010-EU6DR600210IC9035-6LBDP1H

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P759658
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-57)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D08D010-EU6DR600210IC9035-6LBDP1H
Description: 6 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 60° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 823.0 lumens
Efficiency: N/A
Efficacy: 92.5 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.83
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 8.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P759658

CATALOG NUMBER: LD6D08D010-EU6DR600210IC9035-6LBDP1H

Luminous Intensity Polar Plot

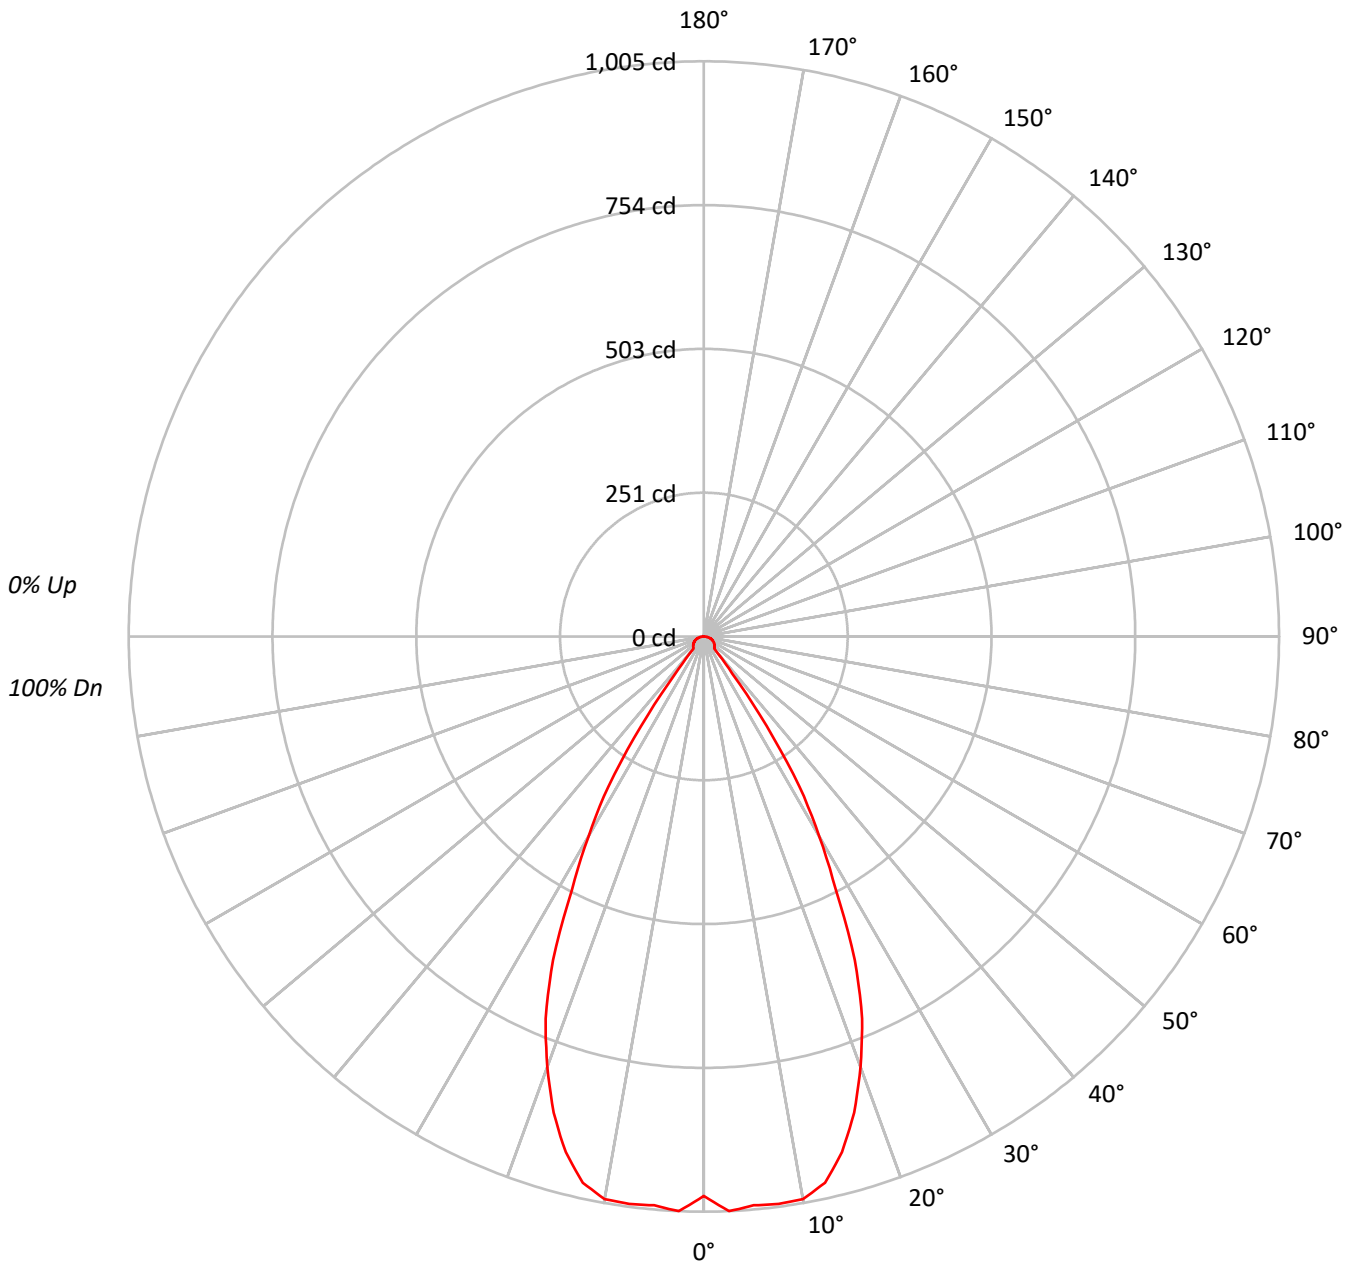



TEST NUMBER: P759658

CATALOG NUMBER: LD6D08D010-EU6DR600210IC9035-6LBDP1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93																			
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86																			
3	102	96	90	86	100	94	89	86	91	88	84	89	86	83	87	84	82	80																			
4	97	89	84	80	95	88	83	79	86	82	78	84	80	77	82	79	76	75																			
5	92	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70																			
6	88	79	73	69	87	78	73	69	77	72	68	75	71	68	74	70	67	66																			
7	84	75	69	65	83	74	68	64	73	68	64	72	67	64	71	67	63	62																			
8	80	71	65	61	79	70	65	61	69	64	60	68	64	60	67	63	60	59																			
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55																			
10	73	64	58	54	72	63	58	54	62	58	54	62	57	54	61	57	54	53																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	106802
5°	109426
10°	110747
15°	105502
20°	93018
25°	75239
30°	50894
35°	25503
40°	4136
45°	4048
50°	4131
55°	4191
60°	4305
65°	4421
70°	4504
75°	4559
80°	4404
85°	3636

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 75°
 Luminance: 4559 cd/sqm



TEST NUMBER: P759658

CATALOG NUMBER: LD6D08D010-EU6DR600210IC9035-6LBDP1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	95.4	11.6
10°-20°	258.0	31.3
20°-30°	277.6	33.7
30°-40°	120.7	14.7
40°-50°	20.3	2.5
50°-60°	19.7	2.4
60°-70°	16.8	2.0
70°-80°	11.3	1.4
80°-90°	3.4	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	630.9	76.7
0°-40°	751.6	91.3
0°-60°	791.5	96.2
0°-90°	823.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	823.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	978	
5°	998	95
15°	933	258
25°	624	278
35°	191	121
45°	26	20
55°	22	20
65°	17	17
75°	11	11
85°	3	3
90°	0	



TEST NUMBER: P759658

CATALOG NUMBER: LD6D08D010-EU6DR600210IC9035-6LBDP1H

CANDELA DISTRIBUTION (FULL):

	0°
0°	977.5
2.5°	1005.0
5°	997.7
7.5°	1000.0
10°	998.2
12.5°	977.6
15°	932.7
17.5°	872.4
20°	800.0
22.5°	722.5
25°	624.1
27.5°	499.2
30°	403.4
32.5°	310.9
35°	191.2
37.5°	81.8
40°	29.0
42.5°	26.7
45°	26.2
47.5°	25.3
50°	24.3
52.5°	23.1
55°	22.0
57.5°	20.9
60°	19.7
62.5°	18.4
65°	17.1
67.5°	15.6
70°	14.1
72.5°	12.5
75°	10.8
77.5°	8.9
80°	7.0
82.5°	5.0
85°	2.9
87.5°	1.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)