

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P759660

Luminaire Tested: LD6D08D010-EU6DR600210IC9035-6LBDP1MW

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P759660
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-57)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D08D010-EU6DR600210IC9035-6LBDP1MW
Description: 6 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 60° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 745.4 lumens
Efficiency: N/A
Efficacy: 83.7 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.83
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 8.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P759660

CATALOG NUMBER: LD6D08D010-EU6DR600210IC9035-6LBDP1MW

Luminous Intensity Polar Plot

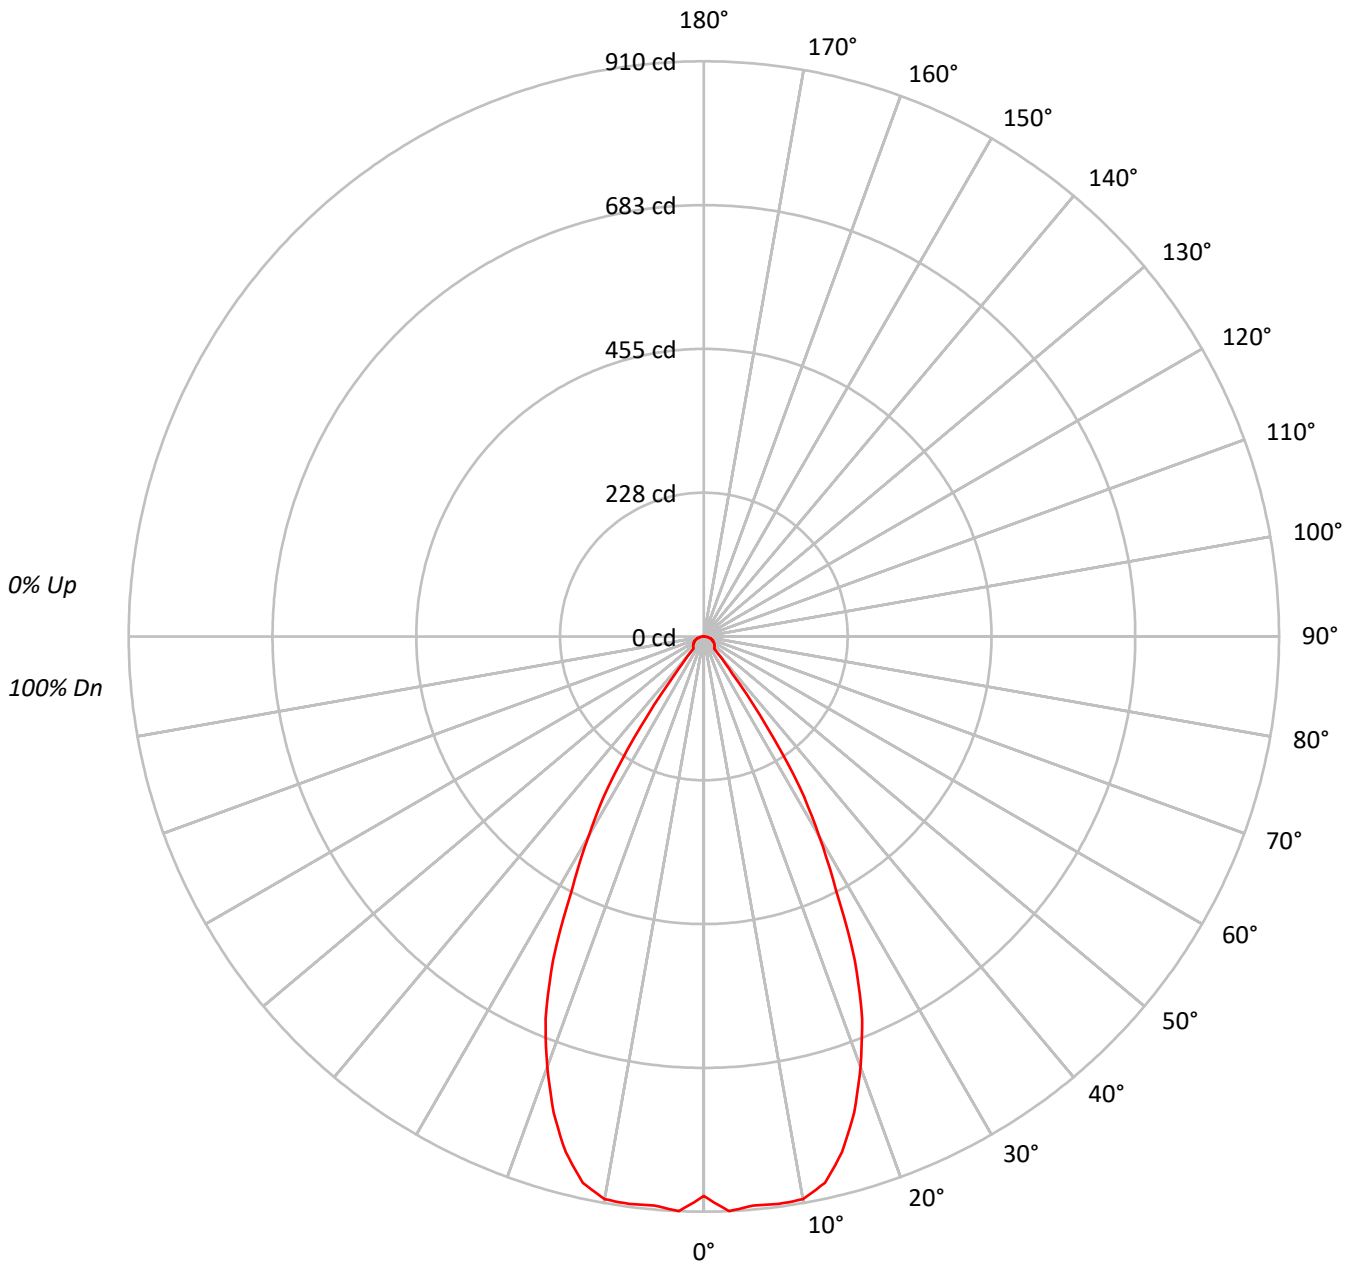



TEST NUMBER: P759660

CATALOG NUMBER: LD6D08D010-EU6DR600210IC9035-6LBDP1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93			93																
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86			86																
3	102	96	90	86	100	94	89	86	91	88	84	89	86	83	87	84	82	80			80																
4	97	89	84	80	95	88	83	79	86	82	78	84	80	77	82	79	76	75			75																
5	92	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70			70																
6	88	79	73	69	87	78	73	69	77	72	68	75	71	68	74	70	67	66			66																
7	84	75	69	65	83	74	68	64	73	68	64	72	67	64	71	67	63	62			62																
8	80	71	65	61	79	70	65	61	69	64	60	68	64	60	67	63	60	59			59																
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55			55																
10	73	64	58	54	72	63	58	54	62	58	54	62	57	54	61	57	54	53			53																

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	96718
5°	99094
10°	100295
15°	95537
20°	84240
25°	68138
30°	46088
35°	23089
40°	3737
45°	3662
50°	3740
55°	3791
60°	3912
65°	3981
70°	4089
75°	4137
80°	4027
85°	3259

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 75°
 Luminance: 4137 cd/sqm



TEST NUMBER: P759660

CATALOG NUMBER: LD6D08D010-EU6DR600210IC9035-6LBDP1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	86.4	11.6
10°-20°	233.6	31.3
20°-30°	251.4	33.7
30°-40°	109.3	14.7
40°-50°	18.3	2.5
50°-60°	17.9	2.4
60°-70°	15.3	2.0
70°-80°	10.2	1.4
80°-90°	3.0	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	571.4	76.7
0°-40°	680.6	91.3
0°-60°	716.8	96.2
0°-90°	745.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	745.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	885	
5°	904	86
15°	845	234
25°	565	251
35°	173	109
45°	24	18
55°	20	18
65°	15	15
75°	10	10
85°	3	3
90°	0	



TEST NUMBER: P759660

CATALOG NUMBER: LD6D08D010-EU6DR600210IC9035-6LBDP1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	885.2
2.5°	910.1
5°	903.5
7.5°	905.6
10°	904.0
12.5°	885.3
15°	844.6
17.5°	790.0
20°	724.5
22.5°	654.4
25°	565.2
27.5°	452.1
30°	365.3
32.5°	281.5
35°	173.1
37.5°	74.1
40°	26.2
42.5°	24.2
45°	23.7
47.5°	22.9
50°	22.0
52.5°	21.0
55°	19.9
57.5°	18.9
60°	17.9
62.5°	16.7
65°	15.4
67.5°	14.2
70°	12.8
72.5°	11.3
75°	9.8
77.5°	8.1
80°	6.4
82.5°	4.5
85°	2.6
87.5°	0.9
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)