

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P759048

Luminaire Tested: LD6D08D010-EU6DR200210IC9040-6LBDP1LI

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P759048  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-36)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D08D010-EU6DR200210IC9040-6LBDP1LI  
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR CLEAR TRIM, WITH 20° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 938.4 lumens  
Efficiency: N/A  
Efficacy: 105.4 lumens/watt  
Spacing Criteria (0/90/45): 0.34 / 0.34 / 0.36  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 8.9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P759048

CATALOG NUMBER: LD6D08D010-EU6DR200210IC9040-6LBDP1LI

### Luminous Intensity Polar Plot

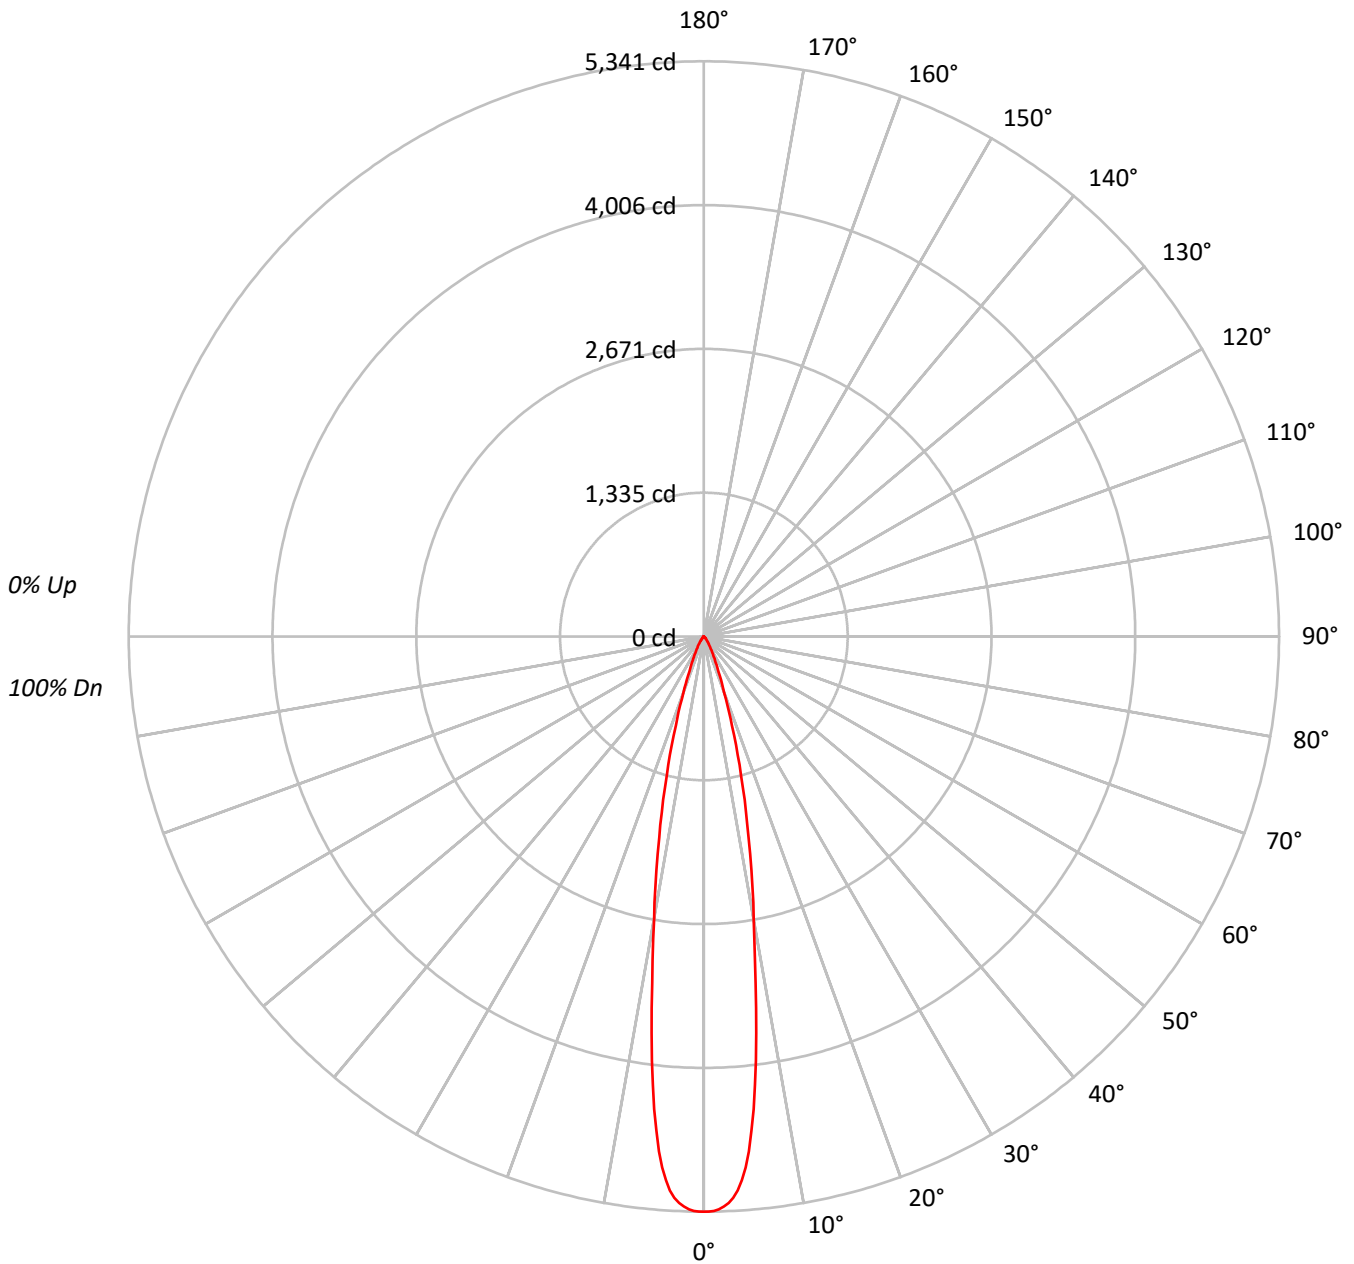



TEST NUMBER: P759048

CATALOG NUMBER: LD6D08D010-EU6DR200210IC9040-6LBDP1LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100															
1	115	113	111	109	113	111	109	108	107	106	104	103	102	101	100	99	98	97	97	97	97																
2	111	108	105	102	109	106	104	101	103	101	99	100	99	97	98	96	95	94	94	94	94																
3	108	103	100	97	106	102	99	96	100	97	95	97	95	93	95	93	92	91	91	91	91																
4	105	99	96	93	103	98	95	92	96	93	91	95	92	90	93	91	89	88	88	88	88																
5	102	96	92	89	100	95	91	89	94	90	88	92	89	87	91	88	86	85	85	85	85																
6	99	93	89	86	98	92	88	86	91	87	85	90	87	84	88	86	84	83	83	83	83																
7	96	90	86	83	95	89	86	83	88	85	82	87	84	82	86	84	82	81	81	81	81																
8	94	87	83	81	93	87	83	80	86	83	80	85	82	80	84	82	80	79	79	79	79																
9	91	85	81	78	91	85	81	78	84	80	78	83	80	78	82	80	78	77	77	77	77																
10	89	83	79	76	88	82	79	76	82	78	76	81	78	76	81	78	76	75	75	75	75																

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	583594
5°	526510
10°	295505
15°	150217
20°	63601
25°	29355
30°	15543
35°	8376
40°	4479
45°	2642
50°	1530
55°	819
60°	524
65°	362
70°	160
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 2642 cd/sqm



TEST NUMBER: P759048

CATALOG NUMBER: LD6D08D010-EU6DR200210IC9040-6LBDP1LI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	380.3	40.5
10°-20°	374.5	39.9
20°-30°	122.3	13.0
30°-40°	41.7	4.4
40°-50°	14.0	1.5
50°-60°	4.2	0.4
60°-70°	1.4	0.2
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	877.1	93.5
0°-40°	918.8	97.9
0°-60°	936.9	99.8
0°-90°	938.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	938.4	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	5341	
5°	4800	380
15°	1328	374
25°	244	122
35°	63	42
45°	17	14
55°	4	4
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P759048

CATALOG NUMBER: LD6D08D010-EU6DR200210IC9040-6LBDP1LI

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	5341.3
0.5°	5341.3
1°	5334.7
1.5°	5321.3
2°	5297.1
2.5°	5264.7
3°	5219.1
3.5°	5155.3
4°	5060.7
4.5°	4945.6
5°	4800.5
5.5°	4609.8
6°	4414.3
6.5°	4190.3
7°	3971.0
7.5°	3714.2
8°	3484.9
8.5°	3254.3
9°	3041.2
9.5°	2845.7
10°	2663.5
12.5°	1912.5
15°	1328.0
17.5°	867.5
20°	547.0
22.5°	354.3
25°	243.5
27.5°	171.2
30°	123.2
32.5°	88.5
35°	62.8
37.5°	43.8
40°	31.4
42.5°	22.8
45°	17.1
47.5°	13.3
50°	9.0
52.5°	5.7
55°	4.3
57.5°	3.3
60°	2.4
62.5°	1.9
65°	1.4



TEST NUMBER: P759048

CATALOG NUMBER: LD6D08D010-EU6DR200210IC9040-6LBDP1LI

**CANDELA DISTRIBUTION (continued):**

	0°
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



67.5°		1.0
70°		0.5

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)