

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P772008

Luminaire Tested: LD6D80BD010-EU6DR4070959027-6LBS1MW

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P772008
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-28)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D80BD010-EU6DR4070959027-6LBS1MW
Description: 6 INCH ROUND SHALLOW MATTE WHITE TRIM, WITH 40° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 9793.8 lumens
Efficiency: N/A
Efficacy: 124.1 lumens/watt
Spacing Criteria (0/90/45): 0.68 / 0.68 / 0.6
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 78.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P772008

CATALOG NUMBER: LD6D80BD010-EU6DR4070959027-6LBS1MW

Luminous Intensity Polar Plot

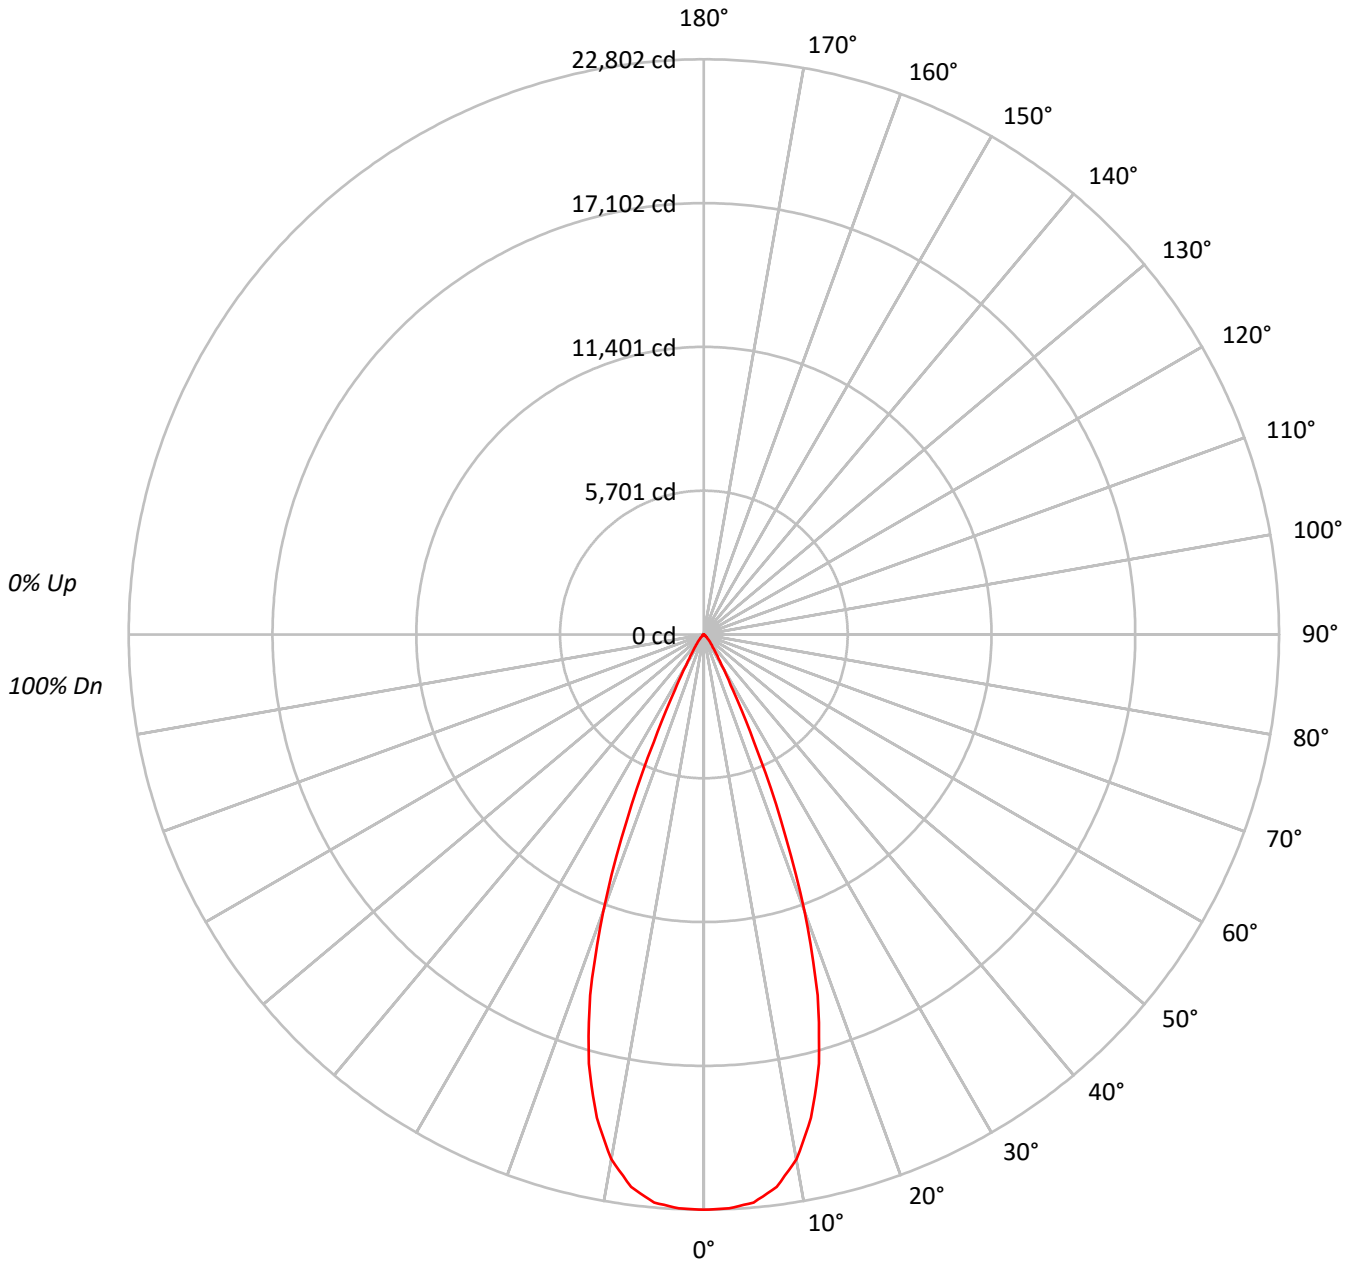



TEST NUMBER: P772008

CATALOG NUMBER: LD6D80BD010-EU6DR4070959027-6LBS1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	115	112	110	108	112	110	108	107	106	105	103	103	101	100	99	98	97	96		
2	110	106	103	100	108	105	102	99	102	99	97	99	97	95	96	95	93	92		
3	106	101	97	94	104	100	96	93	97	94	92	95	93	90	93	91	89	88		
4	102	97	92	89	101	95	91	88	93	90	87	92	89	86	90	87	85	84		
5	99	92	88	84	97	91	87	84	90	86	83	88	85	83	87	84	82	81		
6	95	88	84	80	94	88	83	80	86	82	80	85	82	79	84	81	79	77		
7	92	85	80	77	91	84	80	77	83	79	76	82	79	76	81	78	76	74		
8	89	82	77	74	88	81	77	74	80	76	73	79	76	73	78	75	73	72		
9	86	79	74	71	85	78	74	71	77	73	71	76	73	70	76	72	70	69		
10	83	76	71	68	82	75	71	68	75	71	68	74	70	68	73	70	68	67		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	2491418
5°	2479318
10°	2343496
15°	1992273
20°	1357869
25°	566565
30°	178143
35°	82791
40°	45784
45°	20999
50°	10182
55°	5581
60°	2906
65°	1034
70°	415
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 20999 cd/sqm



TEST NUMBER: P772008

CATALOG NUMBER: LD6D80BD010-EU6DR4070959027-6LBS1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	2110.8	21.6
10°-20°	4728.7	48.3
20°-30°	2367.0	24.2
30°-40°	433.9	4.4
40°-50°	119.7	1.2
50°-60°	28.1	0.3
60°-70°	5.4	0.1
70°-80°	0.2	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	9206.5	94.0
0°-40°	9640.4	98.4
0°-60°	9788.2	99.9
0°-90°	9793.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	9793.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	22802	
5°	22605	###
15°	17613	4729
25°	4700	2367
35°	621	434
45°	136	120
55°	29	28
65°	4	5
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P772008

CATALOG NUMBER: LD6D80BD010-EU6DR4070959027-6LBS1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	22802.5
2.5°	22769.2
5°	22605.4
7.5°	22083.2
10°	21122.8
12.5°	19625.5
15°	17612.8
17.5°	14995.2
20°	11678.3
22.5°	7961.8
25°	4699.6
27.5°	2484.3
30°	1412.0
32.5°	912.5
35°	620.7
37.5°	443.6
40°	321.0
42.5°	219.8
45°	135.9
47.5°	86.6
50°	59.9
52.5°	42.6
55°	29.3
57.5°	18.6
60°	13.3
62.5°	8.0
65°	4.0
67.5°	2.7
70°	1.3
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)