

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P772404

Luminaire Tested: LD6D80BD010-EU6DR6570959030-6LBDP1B

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P772404
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-59)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D80BD010-EU6DR6570959030-6LBDP1B
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6308.6 lumens
Efficiency: N/A
Efficacy: 80.0 lumens/watt
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.92
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct


Input Watts (W): 78.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



Downlight

TEST NUMBER: P772404
CATALOG NUMBER: LD6D80BD010-EU6DR6570959030-6LBDP1B

Luminous Intensity Polar Plot

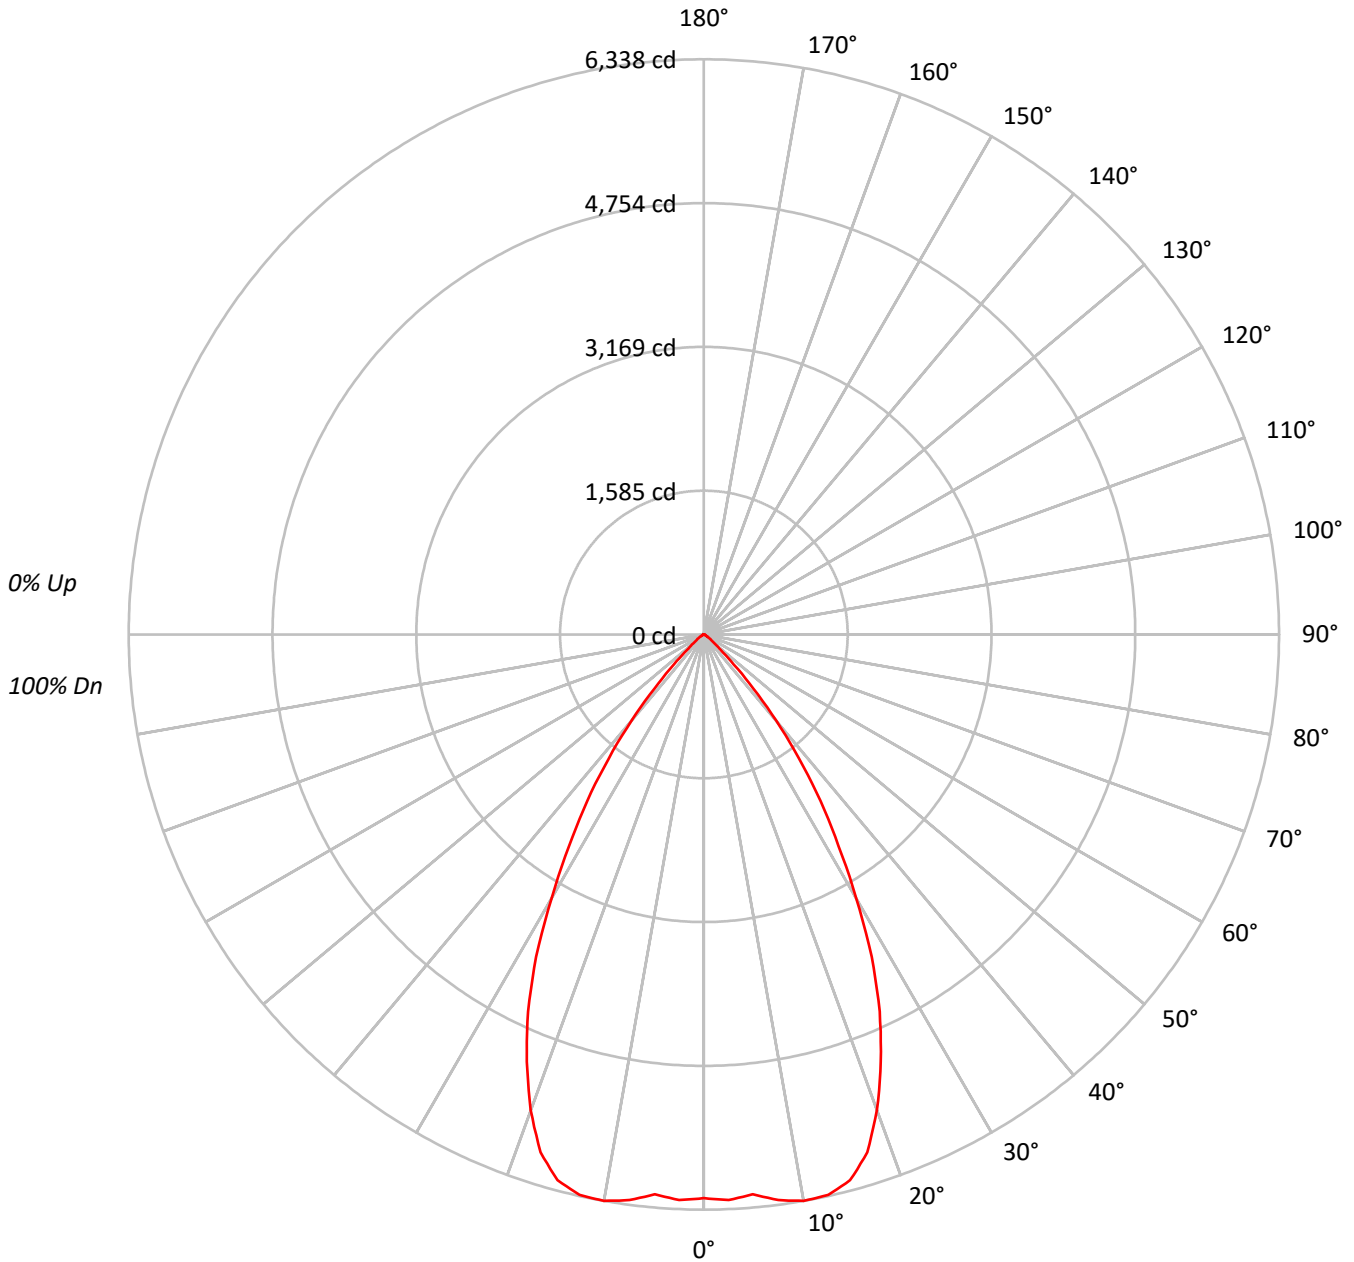



TEST NUMBER: P772404

CATALOG NUMBER: LD6D80BD010-EU6DR6570959030-6LBDP1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93																			
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87																			
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80																			
4	97	89	84	79	95	88	83	79	86	82	78	84	80	77	82	79	76	75																			
5	92	83	78	73	90	83	77	73	81	76	72	79	75	72	77	74	71	69																			
6	87	78	72	68	86	77	72	68	76	71	67	74	70	67	73	69	66	65																			
7	83	73	67	63	81	73	67	63	71	66	62	70	66	62	69	65	62	60																			
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	57																			
9	75	65	59	55	74	65	59	55	64	58	55	63	58	55	62	58	54	53																			
10	71	61	56	52	70	61	55	52	60	55	51	59	55	51	59	54	51	50																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	678651
5°	679215
10°	703122
15°	704288
20°	648419
25°	552484
30°	422950
35°	298804
40°	176376
45°	71604
50°	25956
55°	14458
60°	8304
65°	4576
70°	4792
75°	3715
80°	3901
85°	3259

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 71604 cd/sqm



TEST NUMBER: P772404

CATALOG NUMBER: LD6D80BD010-EU6DR6570959030-6LBDP1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	598.1	9.5
10°-20°	1725.2	27.3
20°-30°	2070.0	32.8
30°-40°	1391.1	22.1
40°-50°	416.4	6.6
50°-60°	73.5	1.2
60°-70°	20.9	0.3
70°-80°	10.2	0.2
80°-90°	3.2	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4393.3	69.6
0°-40°	5784.4	91.7
0°-60°	6274.3	99.5
0°-90°	6308.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6308.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	6211	
5°	6193	598
15°	6226	1725
25°	4583	2070
35°	2240	1391
45°	463	416
55°	76	73
65°	18	21
75°	9	10
85°	3	3
90°	0	



TEST NUMBER: P772404

CATALOG NUMBER: LD6D80BD010-EU6DR6570959030-6LBDP1B

CANDELA DISTRIBUTION (FULL):

0°	
0°	6211.3
2.5°	6237.8
5°	6192.8
7.5°	6286.3
10°	6337.5
12.5°	6325.2
15°	6226.3
17.5°	5984.5
20°	5576.7
22.5°	5096.5
25°	4582.8
27.5°	4002.9
30°	3352.4
32.5°	2762.7
35°	2240.2
37.5°	1723.8
40°	1236.6
42.5°	807.6
45°	463.4
47.5°	245.4
50°	152.7
52.5°	105.9
55°	75.9
57.5°	54.7
60°	38.0
62.5°	24.7
65°	17.7
67.5°	15.9
70°	15.0
72.5°	11.5
75°	8.8
77.5°	7.9
80°	6.2
82.5°	4.4
85°	2.6
87.5°	1.8
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)