

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P771794

Luminaire Tested: LD6D80BD010-EU6DR2570959035-6LBDP1H

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P771794  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-4)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D80BD010-EU6DR2570959035-6LBDP1H  
Description: 6 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 25° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 8727.0 lumens  
Efficiency: N/A  
Efficacy: 110.6 lumens/watt  
Spacing Criteria (0/90/45): 0.42 / 0.42 / 0.45  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 78.9  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight

TEST NUMBER: P771794

CATALOG NUMBER: LD6D80BD010-EU6DR2570959035-6LBDP1H

### Luminous Intensity Polar Plot

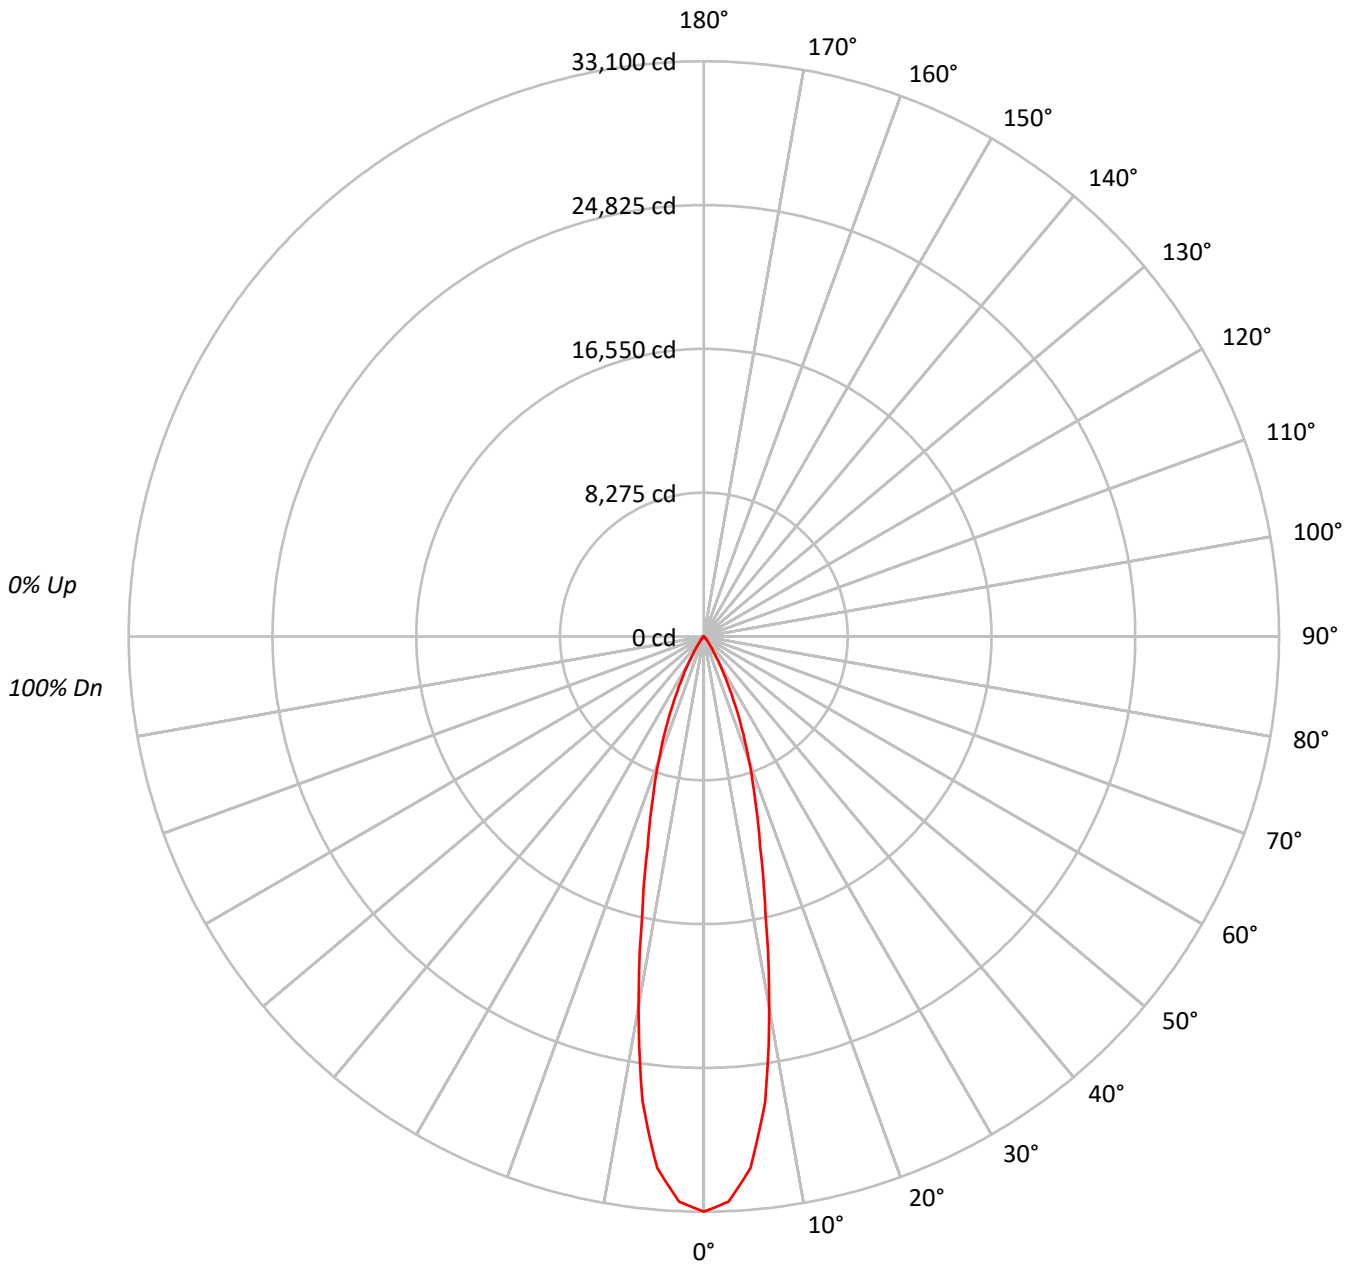



TEST NUMBER: P771794

CATALOG NUMBER: LD6D80BD010-EU6DR2570959035-6LBDP1H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96	96	96	96
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92	92	92	92
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89	89	89	89
4	103	97	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85	85	85	85
5	100	93	89	86	98	93	89	86	91	87	85	89	86	84	88	85	83	82	82	82	82
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79	79	79	79
7	93	87	82	79	92	86	82	79	85	81	78	84	80	78	83	80	78	77	77	77	77
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74	74	74	74
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72	72	72	72
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69	69	69	69

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	3616498
5°	3368314
10°	2402708
15°	1415103
20°	880500
25°	483212
30°	220988
35°	83698
40°	37897
45°	22791
50°	9468
55°	6096
60°	4261
65°	2870
70°	447
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 22791 cd/sqm



TEST NUMBER: P771794

CATALOG NUMBER: LD6D80BD010-EU6DR2570959035-6LBDP1H

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	2639.3	30.2
10°-20°	3574.8	41.0
20°-30°	1891.7	21.7
30°-40°	467.0	5.4
40°-50°	113.9	1.3
50°-60°	30.0	0.3
60°-70°	10.1	0.1
70°-80°	0.2	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	8105.9	92.9
0°-40°	8572.9	98.2
0°-60°	8716.8	99.9
0°-90°	8727.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	8727.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	33100	
5°	30711	###
15°	12510	3575
25°	4008	1892
35°	628	467
45°	148	114
55°	32	30
65°	11	10
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P771794

CATALOG NUMBER: LD6D80BD010-EU6DR2570959035-6LBDP1H

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	33099.7
2.5°	32555.7
5°	30710.9
7.5°	27004.5
10°	21656.5
12.5°	16371.1
15°	12510.3
17.5°	9750.0
20°	7572.7
22.5°	5679.2
25°	4008.2
27.5°	2687.9
30°	1751.6
32.5°	1065.7
35°	627.5
37.5°	384.0
40°	265.7
42.5°	203.1
45°	147.5
47.5°	89.0
50°	55.7
52.5°	40.3
55°	32.0
57.5°	25.0
60°	19.5
62.5°	15.3
65°	11.1
67.5°	4.2
70°	1.4
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)