

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P772339

Luminaire Tested: LD6D80BD010-EU6DR6070959035-6LBDP1B

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P772339
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-57)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D80BD010-EU6DR6070959035-6LBDP1B
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 60° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7713.1 lumens
Efficiency: N/A
Efficacy: 97.8 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.83
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 78.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P772339

CATALOG NUMBER: LD6D80BD010-EU6DR6070959035-6LBDP1B

Luminous Intensity Polar Plot

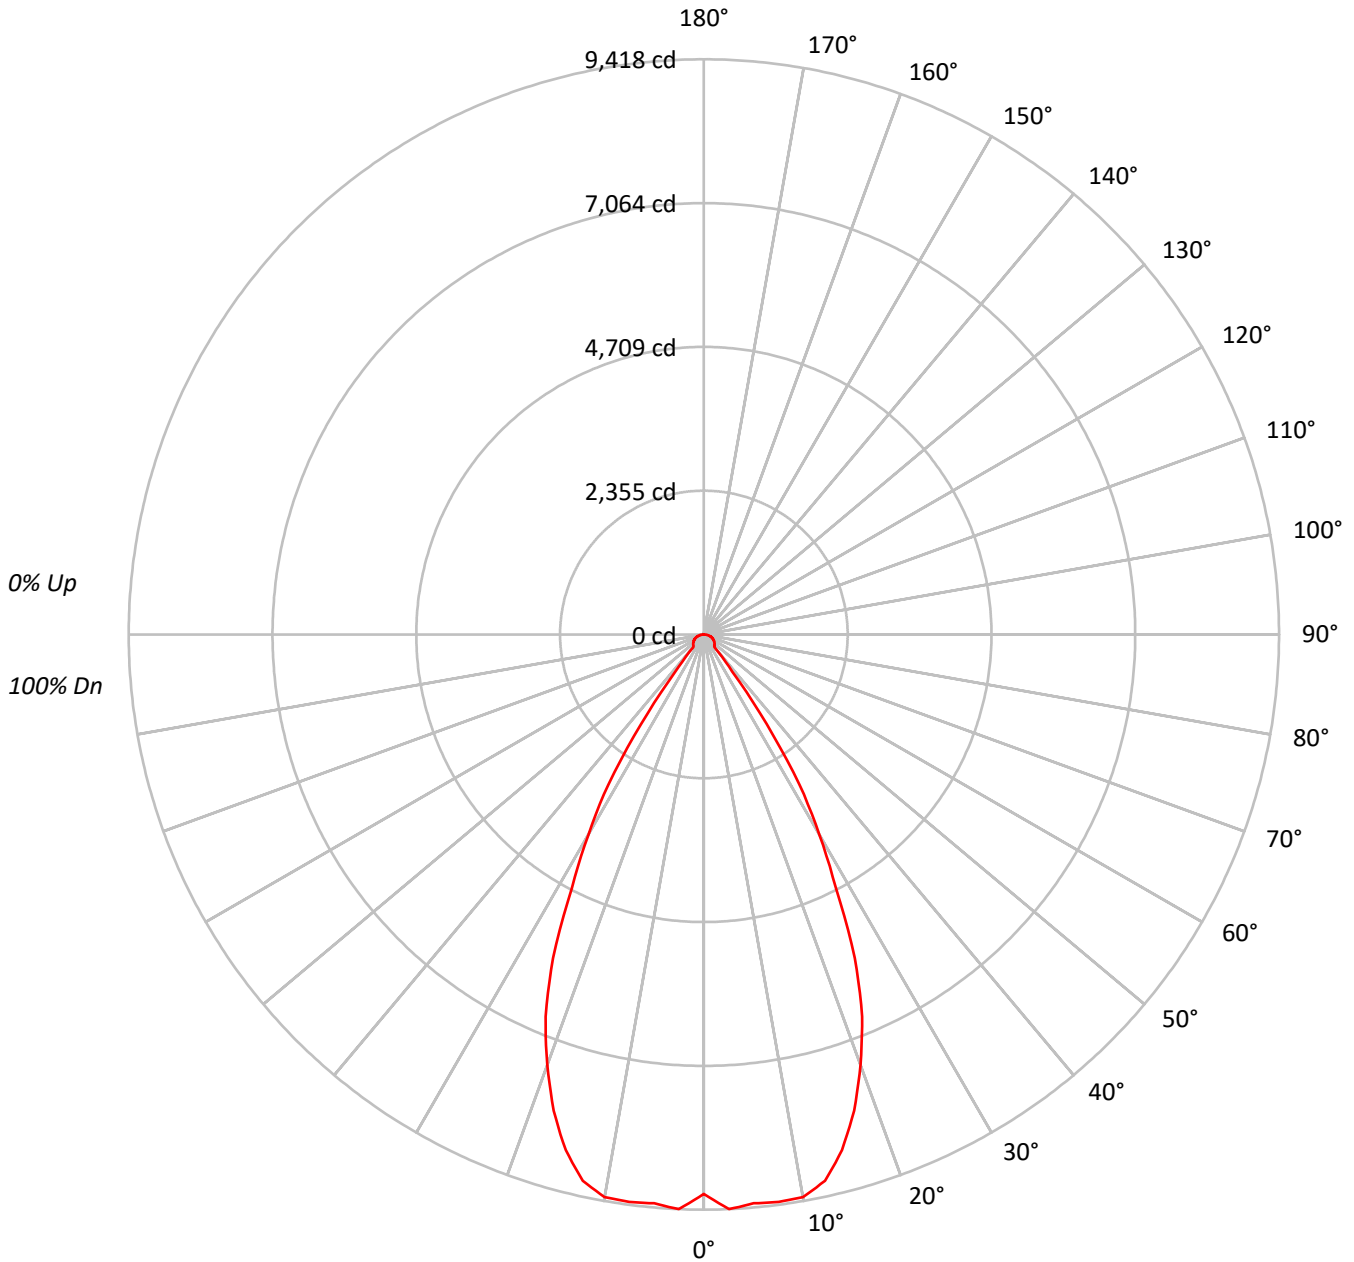



TEST NUMBER: P772339

CATALOG NUMBER: LD6D80BD010-EU6DR6070959035-6LBDP1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93																			
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86																			
3	102	96	90	86	100	94	89	86	91	88	84	89	86	83	87	84	82	80																			
4	97	89	84	80	95	88	83	79	86	82	78	84	80	77	82	79	76	75																			
5	92	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70																			
6	88	79	73	69	87	78	73	69	77	72	68	75	71	68	74	70	67	66																			
7	84	75	69	65	83	74	68	64	73	68	64	72	67	64	71	67	63	62																			
8	80	71	65	61	79	70	65	61	69	64	60	68	64	60	67	63	60	59																			
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55																			
10	73	64	58	54	72	63	58	54	62	58	54	62	57	54	61	57	54	53																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1000872
5°	1025479
10°	1037869
15°	988705
20°	871733
25°	705083
30°	476936
35°	238995
40°	38767
45°	37950
50°	38704
55°	39279
60°	40383
65°	41288
70°	42264
75°	42764
80°	41276
85°	34349

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 75°
 Luminance: 42764 cd/sqm



TEST NUMBER: P772339

CATALOG NUMBER: LD6D80BD010-EU6DR6070959035-6LBDP1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	893.6	11.6
10°-20°	2417.7	31.3
20°-30°	2601.3	33.7
30°-40°	1130.7	14.7
40°-50°	189.9	2.5
50°-60°	184.7	2.4
60°-70°	157.9	2.0
70°-80°	105.7	1.4
80°-90°	31.6	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5912.6	76.7
0°-40°	7043.4	91.3
0°-60°	7417.9	96.2
0°-90°	7713.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	7713.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	9160	
5°	9350	894
15°	8741	2418
25°	5849	2601
35°	1792	1131
45°	246	190
55°	206	185
65°	160	158
75°	101	106
85°	27	32
90°	0	



TEST NUMBER: P772339

CATALOG NUMBER: LD6D80BD010-EU6DR6070959035-6LBDP1B

CANDELA DISTRIBUTION (FULL):

	0°
0°	9160.4
2.5°	9417.9
5°	9349.9
7.5°	9371.4
10°	9354.7
12.5°	9161.6
15°	8740.7
17.5°	8175.7
20°	7497.3
22.5°	6771.3
25°	5848.6
27.5°	4677.9
30°	3780.3
32.5°	2913.6
35°	1791.8
37.5°	766.5
40°	271.8
42.5°	250.3
45°	245.6
47.5°	237.2
50°	227.7
52.5°	217.0
55°	206.2
57.5°	195.5
60°	184.8
62.5°	172.9
65°	159.7
67.5°	146.6
70°	132.3
72.5°	116.8
75°	101.3
77.5°	83.4
80°	65.6
82.5°	46.5
85°	27.4
87.5°	9.5
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)