

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P772421

Luminaire Tested: LD6D80BD010-EU6DR6570959035-6LBS1B

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P772421
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D80BD010-EU6DR6570959035-6LBS1B
Description: 6 INCH ROUND SHALLOW SPECULAR BLACK TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 8364.4 lumens
Efficiency: N/A
Efficacy: 106.0 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96
Luminous Opening: Circular (Dia: 0.48' x H: 0')
CIE Type: Direct


Input Watts (W): 78.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



Downlight

TEST NUMBER: P772421
CATALOG NUMBER: LD6D80BD010-EU6DR6570959035-6LBS1B

Luminous Intensity Polar Plot

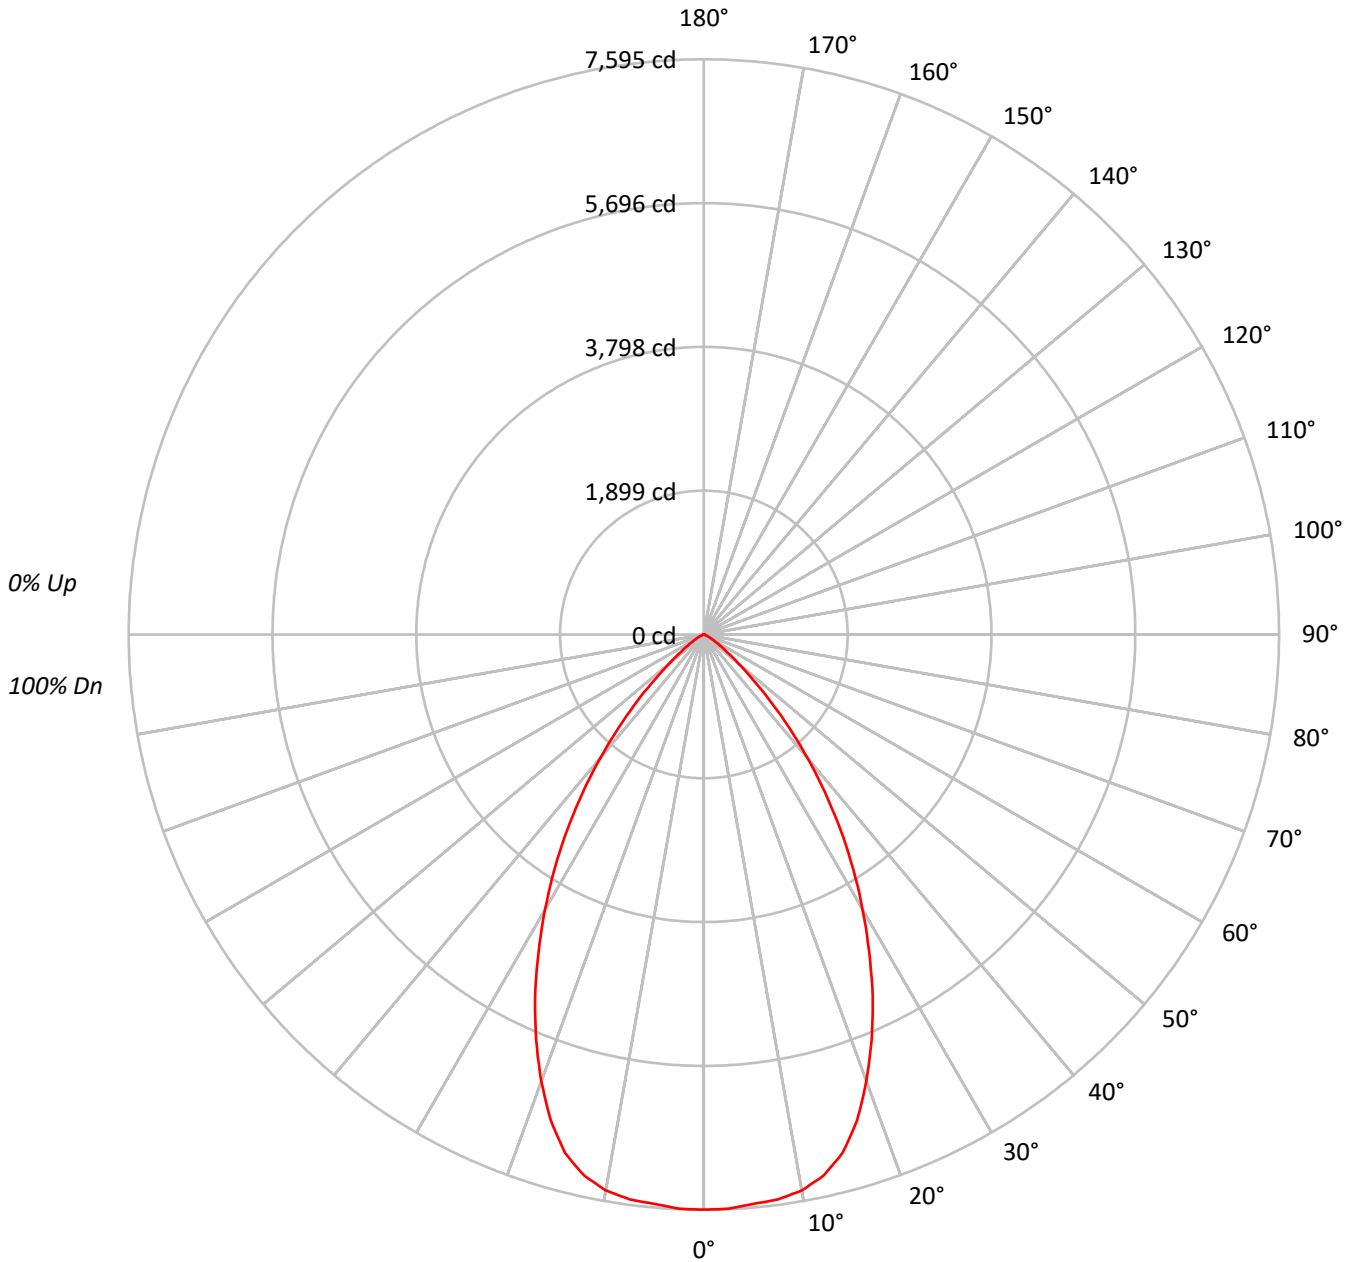



TEST NUMBER: P772421

CATALOG NUMBER: LD6D80BD010-EU6DR6570959035-6LBS1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93																			
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85																			
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78																			
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72																			
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66																			
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61																			
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56																			
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52																			
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49																			
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	443554
5°	442440
10°	442058
15°	428431
20°	390036
25°	339890
30°	282691
35°	223997
40°	161669
45°	102138
50°	53235
55°	28297
60°	14858
65°	8181
70°	3432
75°	3768
80°	2623
85°	2211

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 102138 cd/sqm



TEST NUMBER: P772421

CATALOG NUMBER: LD6D80BD010-EU6DR6570959035-6LBS1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	718.2	8.6
10°-20°	1966.7	23.5
20°-30°	2404.0	28.7
30°-40°	1950.6	23.3
40°-50°	972.0	11.6
50°-60°	271.1	3.2
60°-70°	61.6	0.7
70°-80°	16.0	0.2
80°-90°	4.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5089.0	60.8
0°-40°	7039.5	84.2
0°-60°	8282.7	99.0
0°-90°	8364.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	8364.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	7595	
5°	7547	718
15°	7086	1967
25°	5274	2404
35°	3142	1951
45°	1237	972
55°	278	271
65°	59	62
75°	17	16
85°	3	4
90°	0	



TEST NUMBER: P772421

CATALOG NUMBER: LD6D80BD010-EU6DR6570959035-6LBS1B

CANDELA DISTRIBUTION (FULL):

	0°
0°	7594.6
2.5°	7589.1
5°	7546.7
7.5°	7522.1
10°	7454.0
12.5°	7315.6
15°	7085.7
17.5°	6726.4
20°	6275.5
22.5°	5788.9
25°	5274.4
27.5°	4724.2
30°	4191.8
32.5°	3666.2
35°	3141.7
37.5°	2618.2
40°	2120.5
42.5°	1654.0
45°	1236.6
47.5°	861.6
50°	585.9
52.5°	404.0
55°	277.9
57.5°	187.5
60°	127.2
62.5°	88.2
65°	59.2
67.5°	30.1
70°	20.1
72.5°	19.0
75°	16.7
77.5°	11.2
80°	7.8
82.5°	5.6
85°	3.3
87.5°	2.2
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)