

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P771977

Luminaire Tested: LD6D80BD010-EU6DR3570959050-6LBDP1LI

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P771977
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-20)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D80BD010-EU6DR3570959050-6LBDP1LI
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR CLEAR TRIM, WITH 35° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 10326.8 lumens
Efficiency: N/A
Efficacy: 130.9 lumens/watt
Spacing Criteria (0/90/45): 0.6 / 0.6 / 0.54
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 78.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P771977

CATALOG NUMBER: LD6D80BD010-EU6DR3570959050-6LBDP1LI

Luminous Intensity Polar Plot

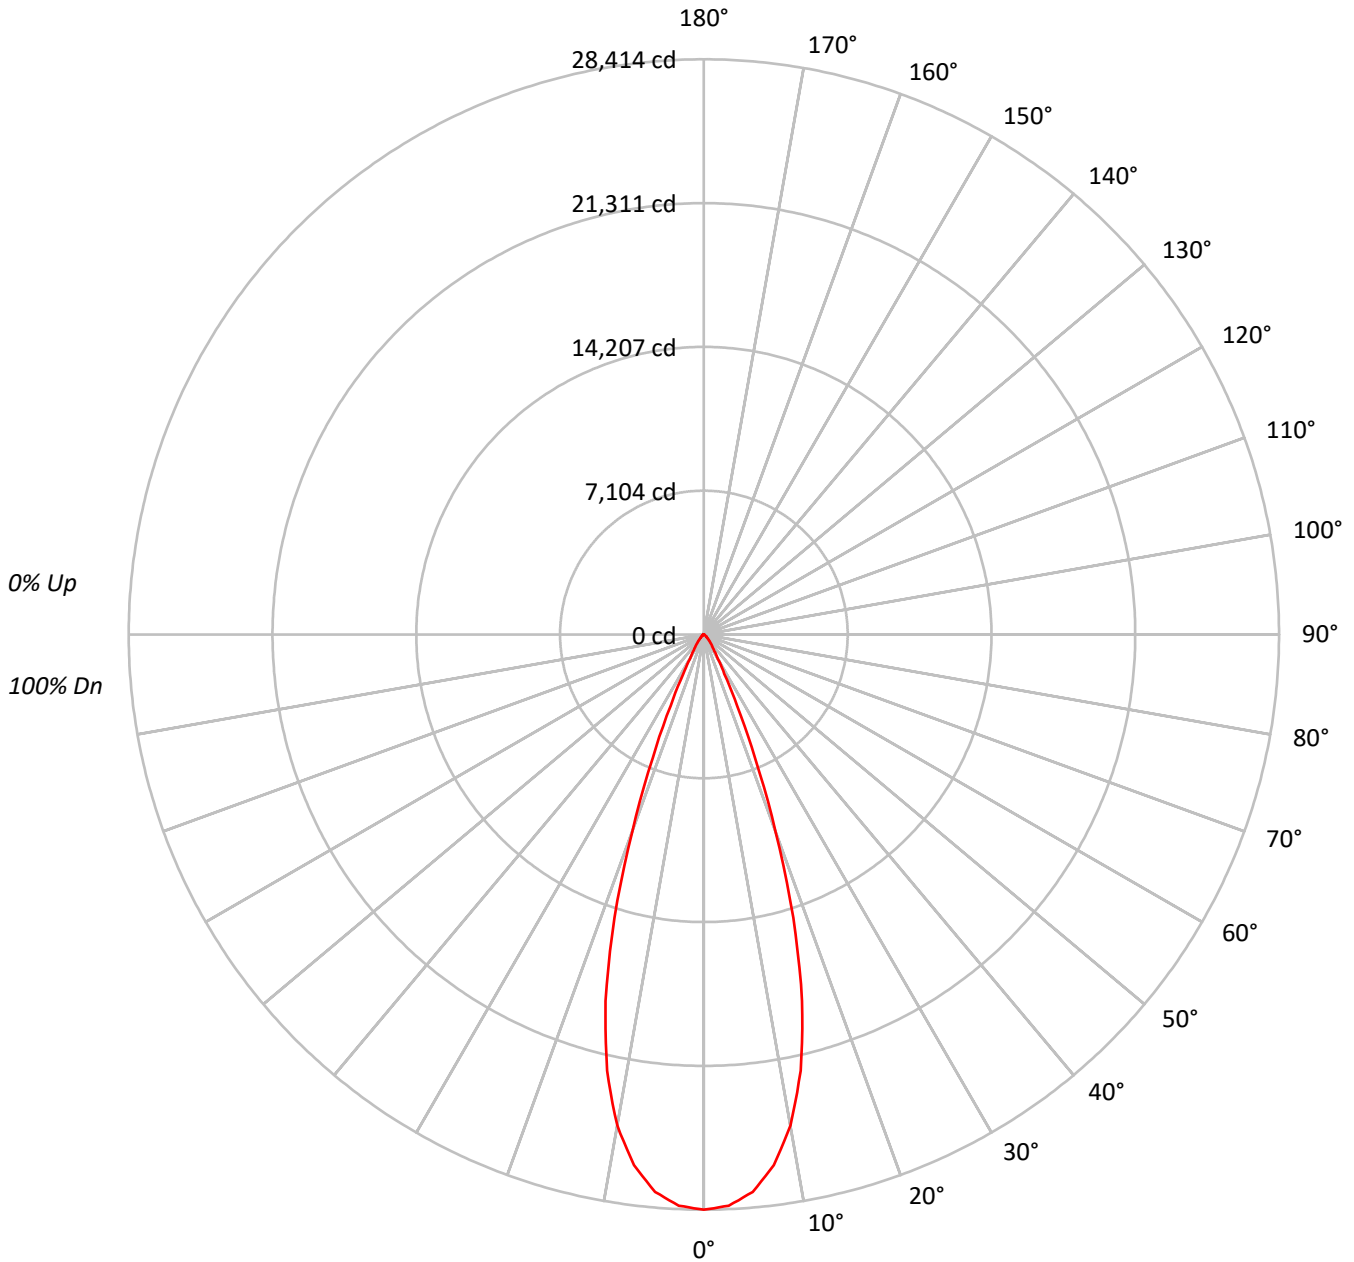



TEST NUMBER: P771977

CATALOG NUMBER: LD6D80BD010-EU6DR3570959050-6LBDP1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	115	112	110	108	112	110	108	107	106	105	103	103	101	100	99	98	98	96																			
2	110	106	103	101	108	105	102	99	102	99	97	99	97	95	96	95	93	92																			
3	106	101	97	94	105	100	96	93	97	95	92	95	93	91	93	91	89	88																			
4	103	97	92	89	101	96	92	89	94	90	88	92	89	87	90	88	86	84																			
5	99	93	88	85	98	92	87	84	90	86	84	89	85	83	87	84	82	81																			
6	96	89	84	81	94	88	84	81	87	83	80	85	82	80	84	81	79	78																			
7	93	85	81	78	91	85	80	77	84	80	77	83	79	77	82	79	76	75																			
8	90	82	78	74	88	82	77	74	81	77	74	80	76	74	79	76	73	72																			
9	87	79	75	72	86	79	75	72	78	74	71	77	74	71	77	73	71	70																			
10	84	77	72	69	83	76	72	69	76	72	69	75	71	69	74	71	69	68																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	3104557
5°	3031613
10°	2732285
15°	2120692
20°	1202820
25°	467950
30°	174585
35°	95689
40°	62543
45°	38073
50°	24239
55°	17125
60°	12521
65°	6799
70°	479
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 38073 cd/sqm



TEST NUMBER: P771977

CATALOG NUMBER: LD6D80BD010-EU6DR3570959050-6LBDP1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	2542.1	24.6
10°-20°	4963.4	48.1
20°-30°	2024.3	19.6
30°-40°	484.4	4.7
40°-50°	201.9	2.0
50°-60°	83.6	0.8
60°-70°	26.1	0.3
70°-80°	0.6	0.0
80°-90°	0.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	9529.8	92.3
0°-40°	10014.2	97.0
0°-60°	10299.7	99.7
0°-90°	10326.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	10326.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	28414	
5°	27641	###
15°	18748	4963
25°	3882	2024
35°	717	484
45°	246	202
55°	90	84
65°	26	26
75°	0	1
85°	0	0
90°	0	



TEST NUMBER: P771977

CATALOG NUMBER: LD6D80BD010-EU6DR3570959050-6LBDP1LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	28414.2
2.5°	28243.7
5°	27641.0
7.5°	26438.5
10°	24627.1
12.5°	22076.5
15°	18748.1
17.5°	14677.4
20°	10344.8
22.5°	6596.5
25°	3881.6
27.5°	2194.2
30°	1383.8
32.5°	971.6
35°	717.4
37.5°	554.7
40°	438.5
42.5°	337.8
45°	246.4
47.5°	184.4
50°	142.6
52.5°	113.1
55°	89.9
57.5°	72.8
60°	57.3
62.5°	41.8
65°	26.3
67.5°	9.3
70°	1.5
72.5°	1.5
75°	0.0
77.5°	0.0
80°	0.0
82.5°	1.5
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)