

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P772733

Luminaire Tested: LD6D85BD010-EU6DR3570959035-6LBS1B

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P772733
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-20)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D85BD010-EU6DR3570959035-6LBS1B
Description: 6 INCH ROUND SHALLOW SPECULAR BLACK TRIM, WITH 35° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 9726.3 lumens
Efficiency: N/A
Efficacy: 110.9 lumens/watt
Spacing Criteria (0/90/45): 0.6 / 0.6 / 0.54
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 87.7
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P772733

CATALOG NUMBER: LD6D85BD010-EU6DR3570959035-6LBS1B

Luminous Intensity Polar Plot

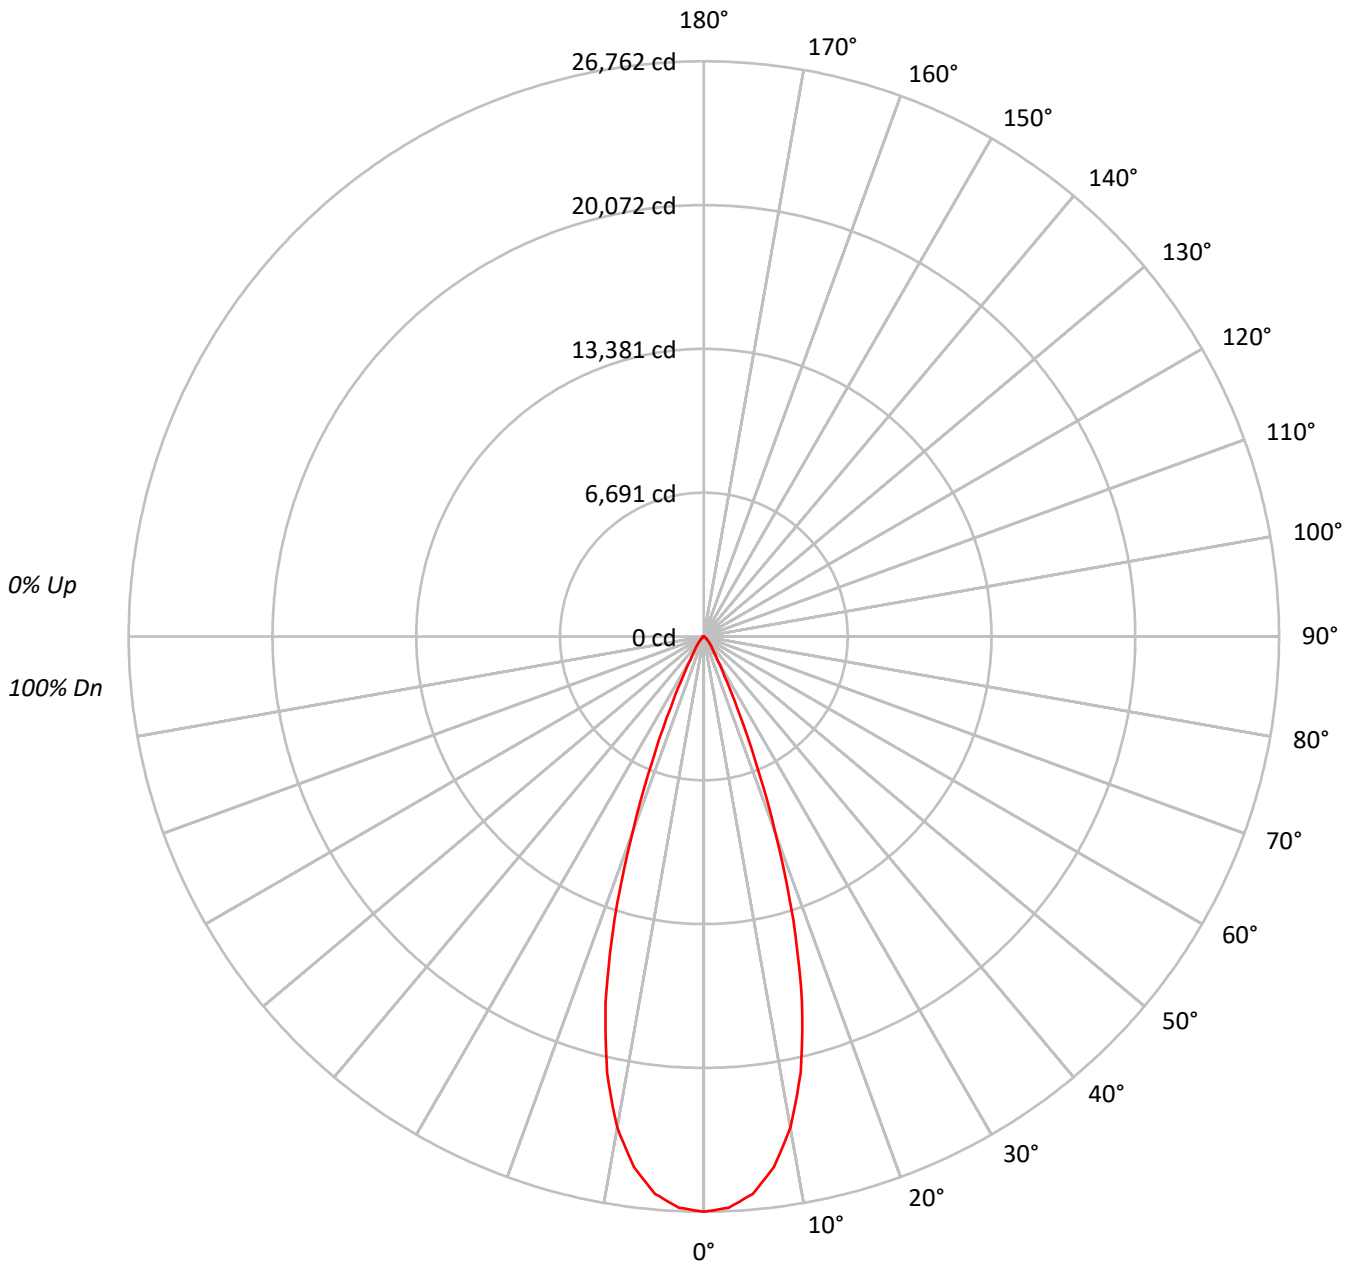



TEST NUMBER: P772733

CATALOG NUMBER: LD6D85BD010-EU6DR3570959035-6LBS1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10		0		
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	115	112	110	108	112	110	108	107	106	105	103	103	101	100	99	98	98	96			
2	110	106	103	101	108	105	102	99	102	99	97	99	97	95	96	95	93	92			
3	106	101	97	94	105	100	96	93	97	95	92	95	93	91	93	91	89	88			
4	103	97	92	89	101	96	92	89	94	90	88	92	89	87	90	88	86	84			
5	99	93	88	85	98	92	87	84	90	86	84	89	85	83	87	84	82	81			
6	96	89	84	81	94	88	84	81	87	83	80	85	82	80	84	81	79	78			
7	93	85	81	78	91	85	80	77	84	80	77	83	79	77	82	79	76	75			
8	90	82	78	74	88	82	77	74	81	77	74	80	76	74	79	76	73	72			
9	87	79	75	72	86	79	75	72	78	74	71	77	74	71	77	73	71	70			
10	84	77	72	69	83	76	72	69	76	72	69	75	71	69	74	71	69	68			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	2923993
5°	2855283
10°	2573366
15°	1997352
20°	1132870
25°	440740
30°	164429
35°	90127
40°	58906
45°	35848
50°	22828
55°	16115
60°	11800
65°	6412
70°	479
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 35848 cd/sqm



TEST NUMBER: P772733

CATALOG NUMBER: LD6D85BD010-EU6DR3570959035-6LBS1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	2394.3	24.6
10°-20°	4674.7	48.1
20°-30°	1906.5	19.6
30°-40°	456.3	4.7
40°-50°	190.1	2.0
50°-60°	78.7	0.8
60°-70°	24.6	0.3
70°-80°	0.6	0.0
80°-90°	0.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	8975.5	92.3
0°-40°	9431.8	97.0
0°-60°	9700.6	99.7
0°-90°	9726.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	9726.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	26762	
5°	26033	###
15°	17658	4675
25°	3656	1907
35°	676	456
45°	232	190
55°	85	79
65°	25	25
75°	0	1
85°	0	0
90°	0	



TEST NUMBER: P772733

CATALOG NUMBER: LD6D85BD010-EU6DR3570959035-6LBS1B

CANDELA DISTRIBUTION (FULL):

0°	
0°	26761.6
2.5°	26601.1
5°	26033.3
7.5°	24900.8
10°	23194.7
12.5°	20792.5
15°	17657.7
17.5°	13823.7
20°	9743.2
22.5°	6212.8
25°	3655.9
27.5°	2066.6
30°	1303.3
32.5°	915.1
35°	675.7
37.5°	522.5
40°	413.0
42.5°	318.2
45°	232.0
47.5°	173.7
50°	134.3
52.5°	106.5
55°	84.6
57.5°	68.6
60°	54.0
62.5°	39.4
65°	24.8
67.5°	8.8
70°	1.5
72.5°	1.5
75°	0.0
77.5°	0.0
80°	0.0
82.5°	1.5
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)