

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P772885

Luminaire Tested: LD6D85BD010-EU6DR4570959035-6LBDP1B

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P772885  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-36)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D85BD010-EU6DR4570959035-6LBDP1B  
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 45° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 9387.6 lumens  
Efficiency: N/A  
Efficacy: 107.0 lumens/watt  
Spacing Criteria (0/90/45): 0.75 / 0.75 / 0.69  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 87.7  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



Downlight

TEST NUMBER: P772885  
CATALOG NUMBER: LD6D85BD010-EU6DR4570959035-6LBDP1B

### Luminous Intensity Polar Plot

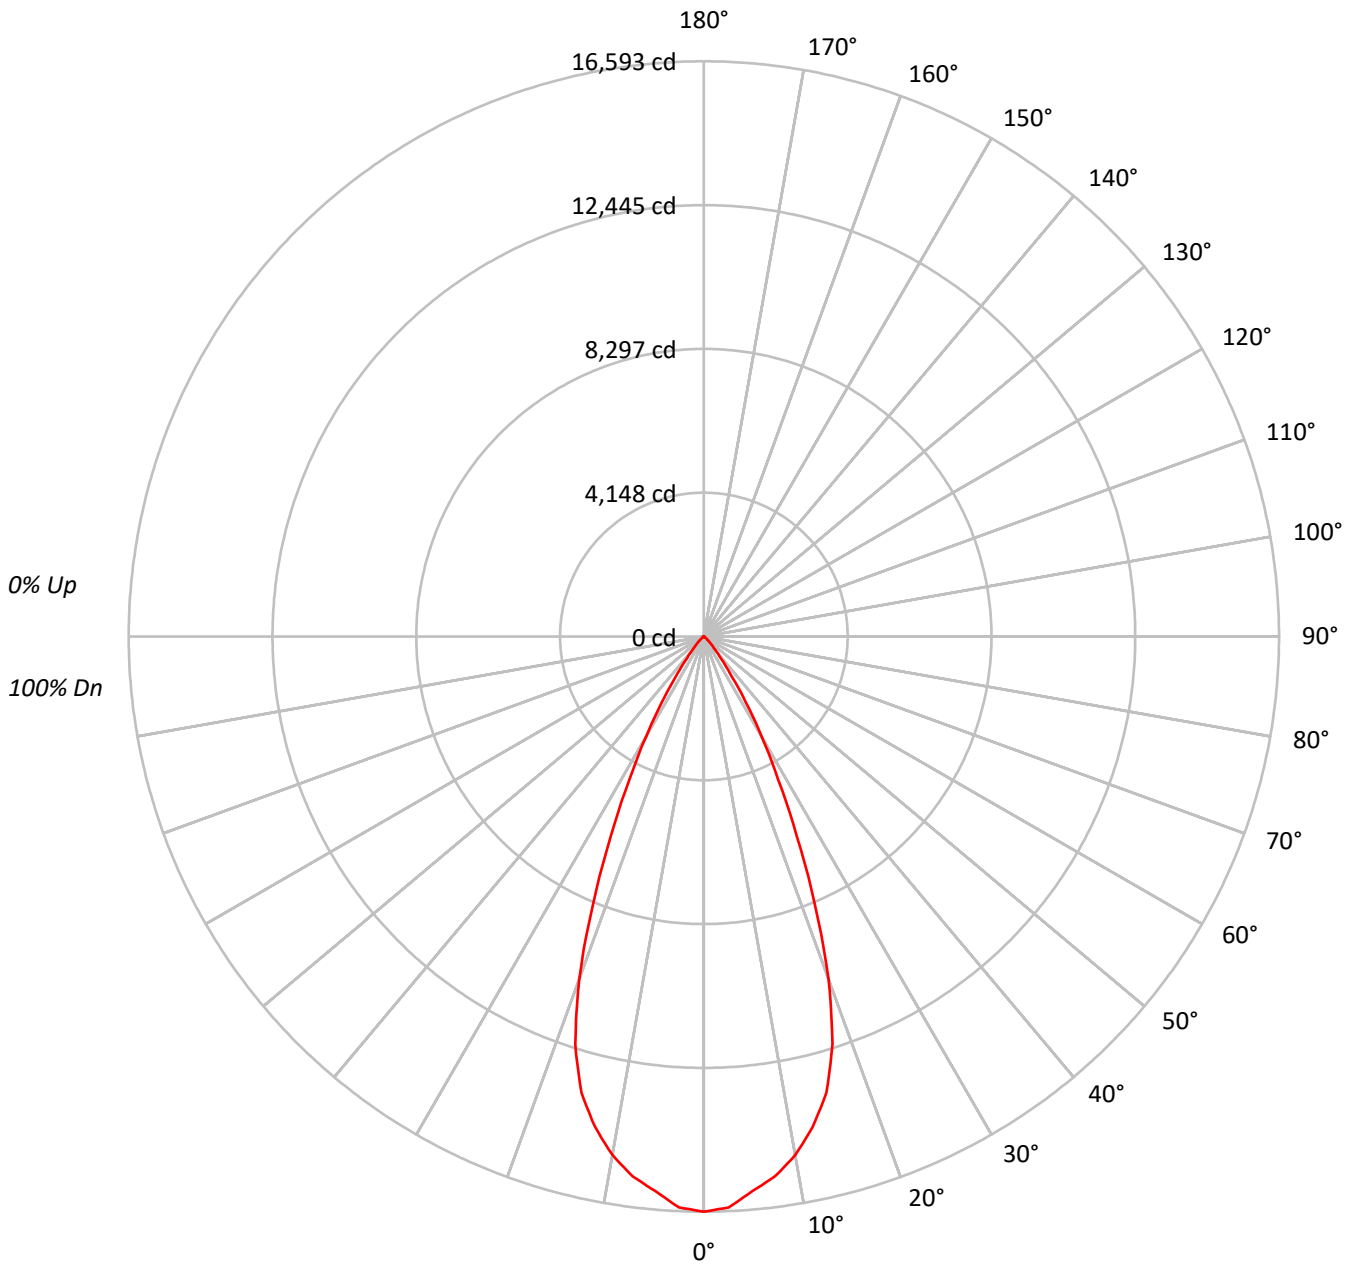



TEST NUMBER: P772885  
 CATALOG NUMBER: LD6D85BD010-EU6DR4570959035-6LBDP1B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	98	98	97	95				
2	109	105	102	99	107	103	100	98	100	98	95	97	95	93	95	93	91	90				
3	105	99	95	91	103	98	94	91	95	92	89	93	90	88	91	89	87	85				
4	100	94	89	85	99	93	88	85	91	87	84	89	86	83	87	84	82	81				
5	96	89	84	80	95	88	83	80	86	82	79	85	81	79	83	80	78	77				
6	92	85	80	76	91	84	79	76	83	78	75	81	77	75	80	77	74	73				
7	89	81	75	72	87	80	75	72	79	74	71	78	74	71	77	73	71	69				
8	85	77	72	68	84	76	71	68	75	71	68	74	70	67	73	70	67	66				
9	82	73	68	65	81	73	68	65	72	68	65	71	67	64	71	67	64	63				
10	79	70	65	62	78	70	65	62	69	65	62	68	64	61	68	64	61	60				

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1812942
5°	1761321
10°	1685108
15°	1542233
20°	1223528
25°	763866
30°	421020
35°	189043
40°	74453
45°	35091
50°	16641
55°	8705
60°	4283
65°	1008
70°	415
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 35091 cd/sqm



TEST NUMBER: P772885

CATALOG NUMBER: LD6D85BD010-EU6DR4570959035-6LBDP1B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	1508.9	16.1
10°-20°	3713.6	39.6
20°-30°	2940.8	31.3
30°-40°	979.3	10.4
40°-50°	194.4	2.1
50°-60°	44.2	0.5
60°-70°	6.3	0.1
70°-80°	0.2	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	8163.3	87.0
0°-40°	9142.6	97.4
0°-60°	9381.1	99.9
0°-90°	9387.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	9387.6	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	16593	
5°	16059	###
15°	13634	3714
25°	6336	2941
35°	1417	979
45°	227	194
55°	46	44
65°	4	6
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P772885

CATALOG NUMBER: LD6D85BD010-EU6DR4570959035-6LBDP1B

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	16592.8
2.5°	16484.5
5°	16059.0
7.5°	15708.0
10°	15188.5
12.5°	14496.9
15°	13634.2
17.5°	12336.9
20°	10522.9
22.5°	8361.7
25°	6336.2
27.5°	4639.6
30°	3337.1
32.5°	2269.5
35°	1417.3
37.5°	840.5
40°	522.0
42.5°	343.2
45°	227.1
47.5°	146.2
50°	97.9
52.5°	65.3
55°	45.7
57.5°	30.0
60°	19.6
62.5°	10.4
65°	3.9
67.5°	1.3
70°	1.3
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)