

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P772746

Luminaire Tested: LD6D85BD010-EU6DR3570959040-6LBS1B

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P772746  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-20)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D85BD010-EU6DR3570959040-6LBS1B  
Description: 6 INCH ROUND SHALLOW SPECULAR BLACK TRIM, WITH 35° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 10180.9 lumens  
Efficiency: N/A  
Efficacy: 116.1 lumens/watt  
Spacing Criteria (0/90/45): 0.6 / 0.6 / 0.54  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 87.7  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight

TEST NUMBER: P772746

CATALOG NUMBER: LD6D85BD010-EU6DR3570959040-6LBS1B

### Luminous Intensity Polar Plot

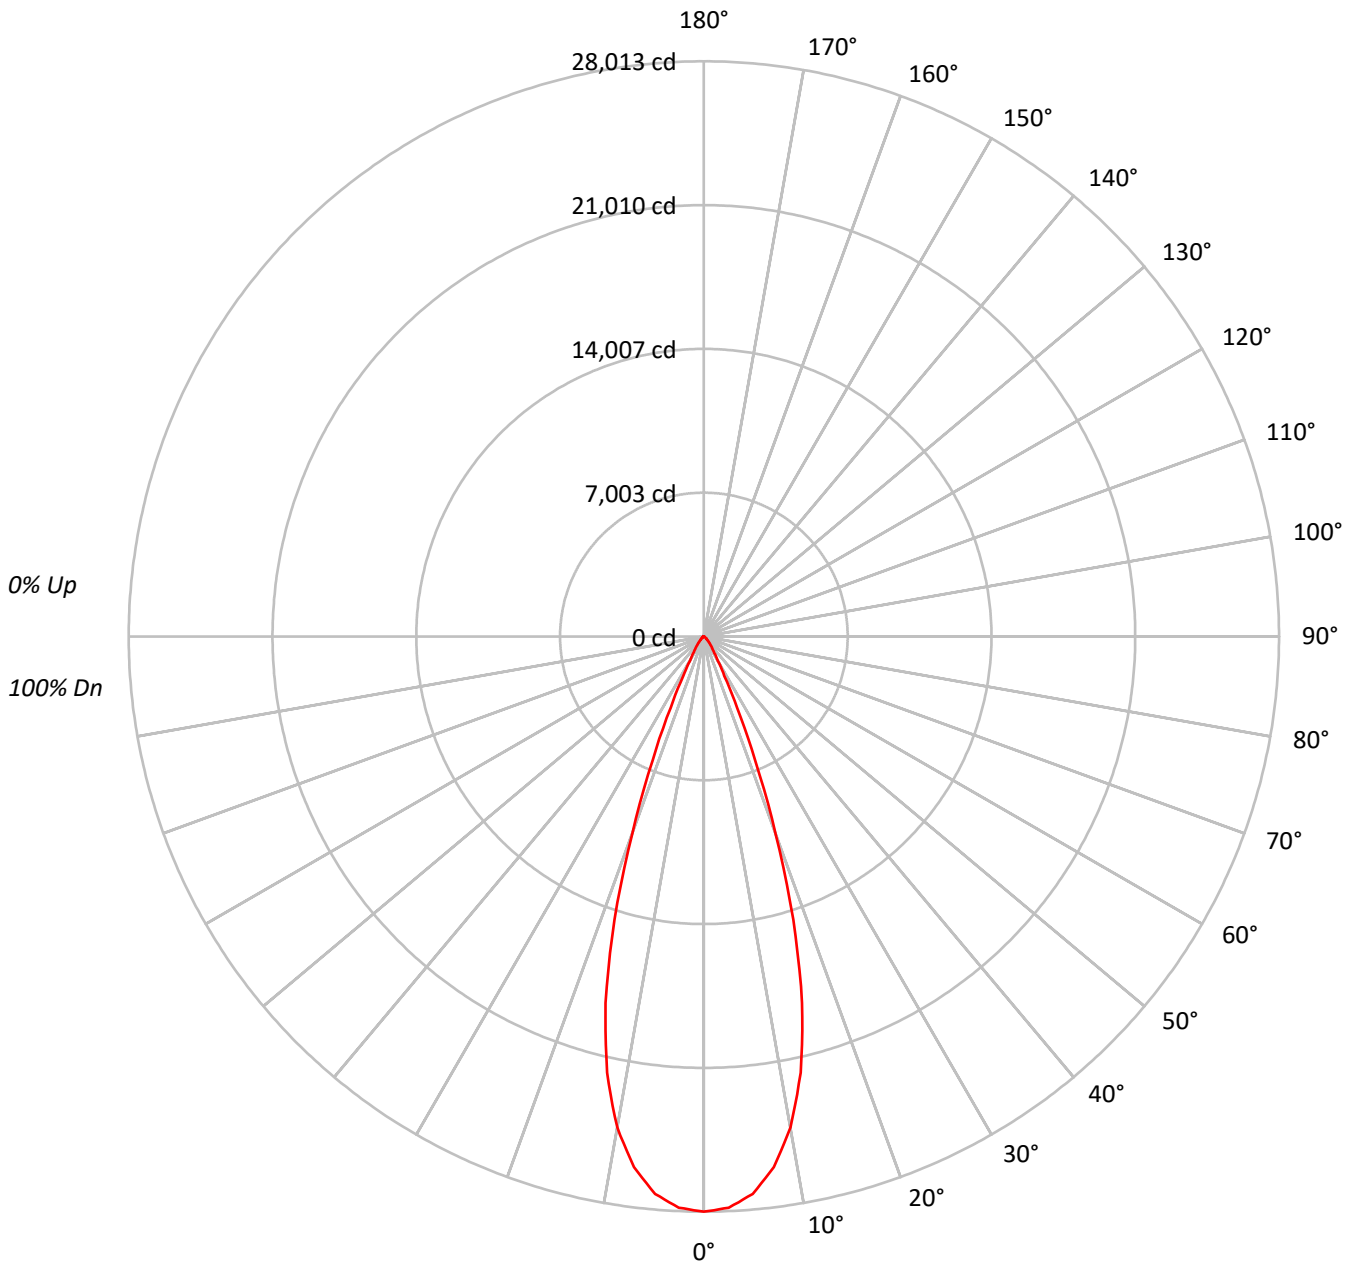



TEST NUMBER: P772746

CATALOG NUMBER: LD6D85BD010-EU6DR3570959040-6LBS1B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	115	112	110	108	112	110	108	107	106	105	103	103	101	100	99	98	98	96			96
2	110	106	103	101	108	105	102	99	102	99	97	99	97	95	96	95	93	92			92
3	106	101	97	94	105	100	96	93	97	95	92	95	93	91	93	91	89	88			88
4	103	97	92	89	101	96	92	89	94	90	88	92	89	87	90	88	86	84			84
5	99	93	88	85	98	92	87	84	90	86	84	89	85	83	87	84	82	81			81
6	96	89	84	81	94	88	84	81	87	83	80	85	82	80	84	81	79	78			78
7	93	85	81	78	91	85	80	77	84	80	77	83	79	77	82	79	76	75			75
8	90	82	78	74	88	82	77	74	81	77	74	80	76	74	79	76	73	72			72
9	87	79	75	72	86	79	75	72	78	74	71	77	74	71	77	73	71	70			70
10	84	77	72	69	83	76	72	69	76	72	69	75	71	69	74	71	69	68			68

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	3060700
5°	2988783
10°	2693676
15°	2090728
20°	1185832
25°	461343
30°	172112
35°	94342
40°	61659
45°	37532
50°	23882
55°	16877
60°	12346
65°	6722
70°	479
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 37532 cd/sqm



TEST NUMBER: P772746

CATALOG NUMBER: LD6D85BD010-EU6DR3570959040-6LBS1B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	2506.2	24.6
10°-20°	4893.3	48.1
20°-30°	1995.7	19.6
30°-40°	477.6	4.7
40°-50°	199.0	2.0
50°-60°	82.4	0.8
60°-70°	25.8	0.3
70°-80°	0.6	0.0
80°-90°	0.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	9395.2	92.3
0°-40°	9872.7	97.0
0°-60°	10154.1	99.7
0°-90°	10180.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	10180.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	28013	
5°	27250	###
15°	18483	4893
25°	3827	1996
35°	707	478
45°	243	199
55°	89	82
65°	26	26
75°	0	1
85°	0	0
90°	0	



TEST NUMBER: P772746

CATALOG NUMBER: LD6D85BD010-EU6DR3570959040-6LBS1B

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	28012.8
2.5°	27844.7
5°	27250.5
7.5°	26065.0
10°	24279.1
12.5°	21764.6
15°	18483.2
17.5°	14470.0
20°	10198.7
22.5°	6503.3
25°	3826.8
27.5°	2163.2
30°	1364.2
32.5°	957.8
35°	707.3
37.5°	546.9
40°	432.3
42.5°	333.0
45°	242.9
47.5°	181.8
50°	140.5
52.5°	111.5
55°	88.6
57.5°	71.8
60°	56.5
62.5°	41.2
65°	26.0
67.5°	9.2
70°	1.5
72.5°	1.5
75°	0.0
77.5°	0.0
80°	0.0
82.5°	1.5
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)