

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P772900

Luminaire Tested: LD6D85BD010-EU6DR4570959040-6LBDP1LI

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P772900  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-36)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D85BD010-EU6DR4570959040-6LBDP1LI  
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR CLEAR TRIM, WITH 45° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 11704.8 lumens  
Efficiency: N/A  
Efficacy: 133.5 lumens/watt  
Spacing Criteria (0/90/45): 0.75 / 0.75 / 0.69  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 87.7  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



Downlight

TEST NUMBER: P772900  
CATALOG NUMBER: LD6D85BD010-EU6DR4570959040-6LBDP1LI

### Luminous Intensity Polar Plot

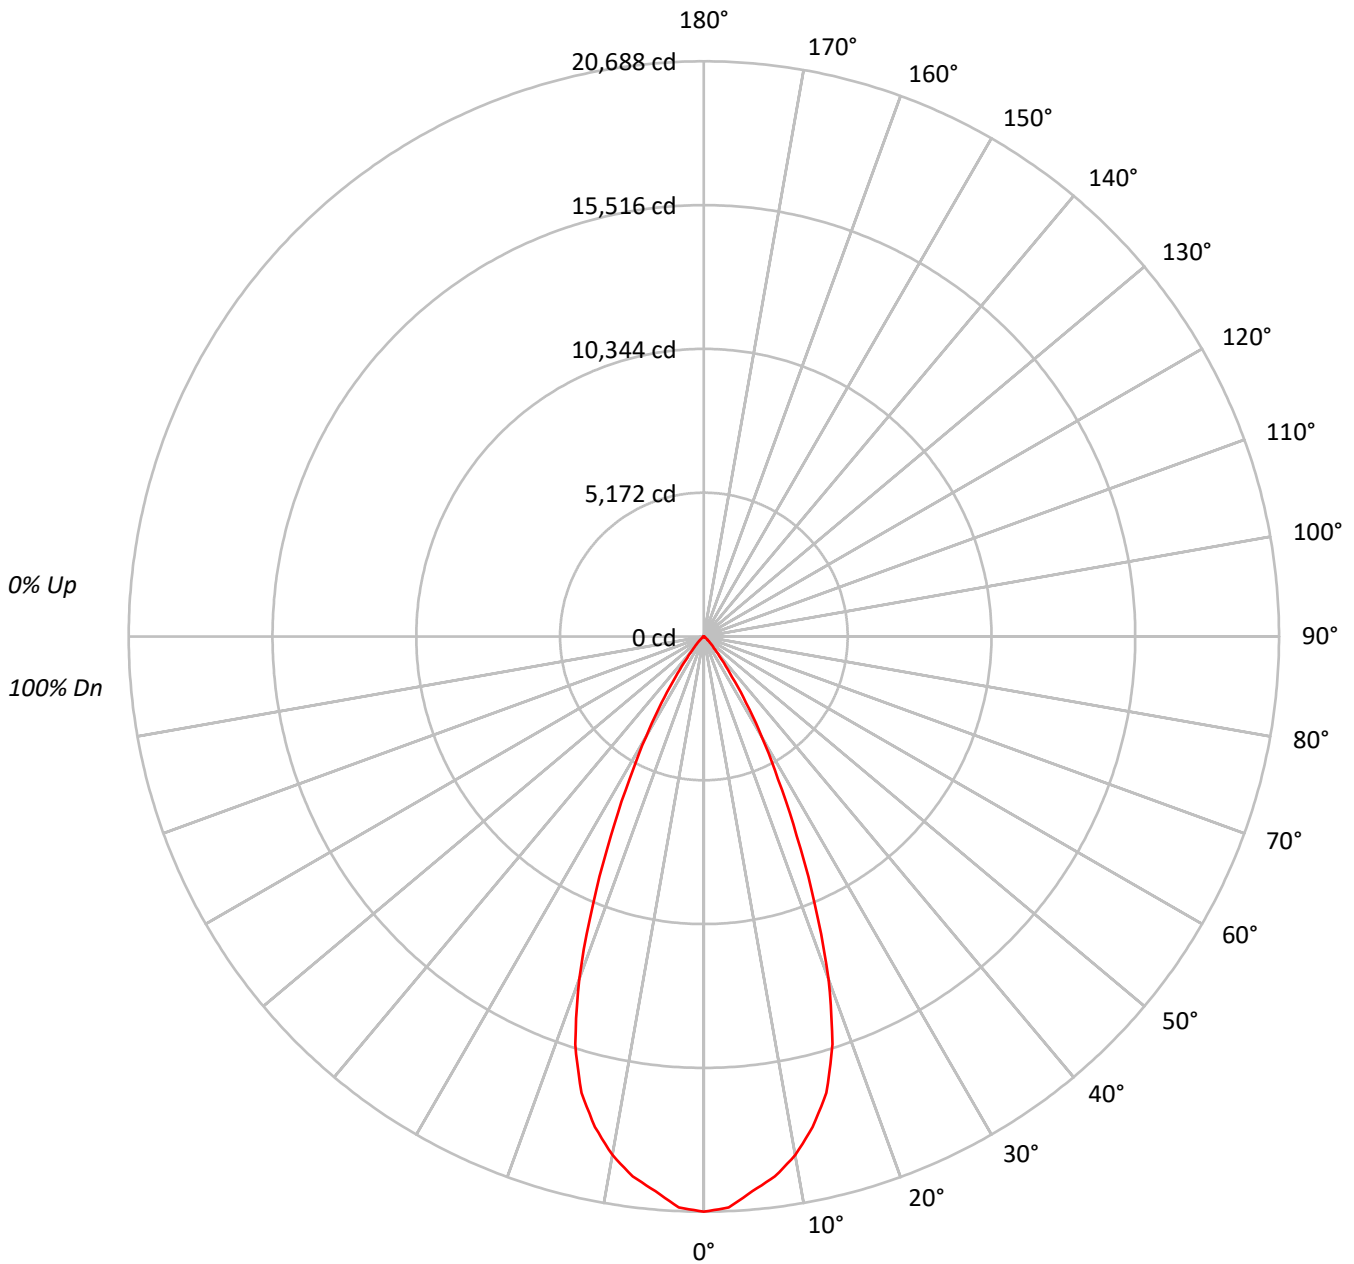



TEST NUMBER: P772900

CATALOG NUMBER: LD6D85BD010-EU6DR4570959040-6LBDP1LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	98	98	97	95			95																
2	109	105	102	99	107	103	100	98	100	98	95	97	95	93	95	93	91	90			90																
3	105	99	95	91	103	98	94	91	95	92	89	93	90	88	91	89	87	85			85																
4	100	94	89	85	99	93	88	85	91	87	84	89	86	83	87	84	82	81			81																
5	96	89	84	80	95	88	83	80	86	82	79	85	81	79	83	80	78	77			77																
6	92	85	80	76	91	84	79	76	83	78	75	81	77	75	80	77	74	73			73																
7	89	81	75	72	87	80	75	72	79	74	71	78	74	71	77	73	71	69			69																
8	85	77	72	68	84	76	71	68	75	71	68	74	70	67	73	70	67	66			66																
9	82	73	68	65	81	73	68	65	72	68	65	71	67	64	71	67	64	63			63																
10	79	70	65	62	78	70	65	62	69	65	62	68	64	61	68	64	61	60			60																

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	2260441
5°	2196074
10°	2101056
15°	1922911
20°	1525535
25°	952416
30°	524941
35°	235714
40°	92838
45°	43744
50°	20738
55°	10858
60°	5332
65°	1267
70°	511
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 43744 cd/sqm



TEST NUMBER: P772900

CATALOG NUMBER: LD6D85BD010-EU6DR4570959040-6LBDP1LI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	1881.3	16.1
10°-20°	4630.2	39.6
20°-30°	3666.7	31.3
30°-40°	1221.0	10.4
40°-50°	242.3	2.1
50°-60°	55.0	0.5
60°-70°	7.9	0.1
70°-80°	0.2	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	10178.3	87.0
0°-40°	11399.3	97.4
0°-60°	11696.7	99.9
0°-90°	11704.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	11704.8	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	20688	
5°	20023	###
15°	17000	4630
25°	7900	3667
35°	1767	1221
45°	283	242
55°	57	55
65°	5	8
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P772900

CATALOG NUMBER: LD6D85BD010-EU6DR4570959040-6LBDP1LI

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	20688.5
2.5°	20553.4
5°	20022.9
7.5°	19585.2
10°	18937.6
12.5°	18075.2
15°	16999.6
17.5°	15382.1
20°	13120.3
22.5°	10425.6
25°	7900.2
27.5°	5784.8
30°	4160.8
32.5°	2829.7
35°	1767.2
37.5°	1047.9
40°	650.9
42.5°	428.0
45°	283.1
47.5°	182.2
50°	122.0
52.5°	81.4
55°	57.0
57.5°	37.4
60°	24.4
62.5°	13.0
65°	4.9
67.5°	1.6
70°	1.6
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)