

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P772762

Luminaire Tested: LD6D85BD010-EU6DR3570959050-6LBS1MW

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P772762
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-20)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D85BD010-EU6DR3570959050-6LBS1MW
Description: 6 INCH ROUND SHALLOW MATTE WHITE TRIM, WITH 35° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 10476.8 lumens
Efficiency: N/A
Efficacy: 119.5 lumens/watt
Spacing Criteria (0/90/45): 0.6 / 0.6 / 0.54
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 87.7
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P772762

CATALOG NUMBER: LD6D85BD010-EU6DR3570959050-6LBS1MW

Luminous Intensity Polar Plot

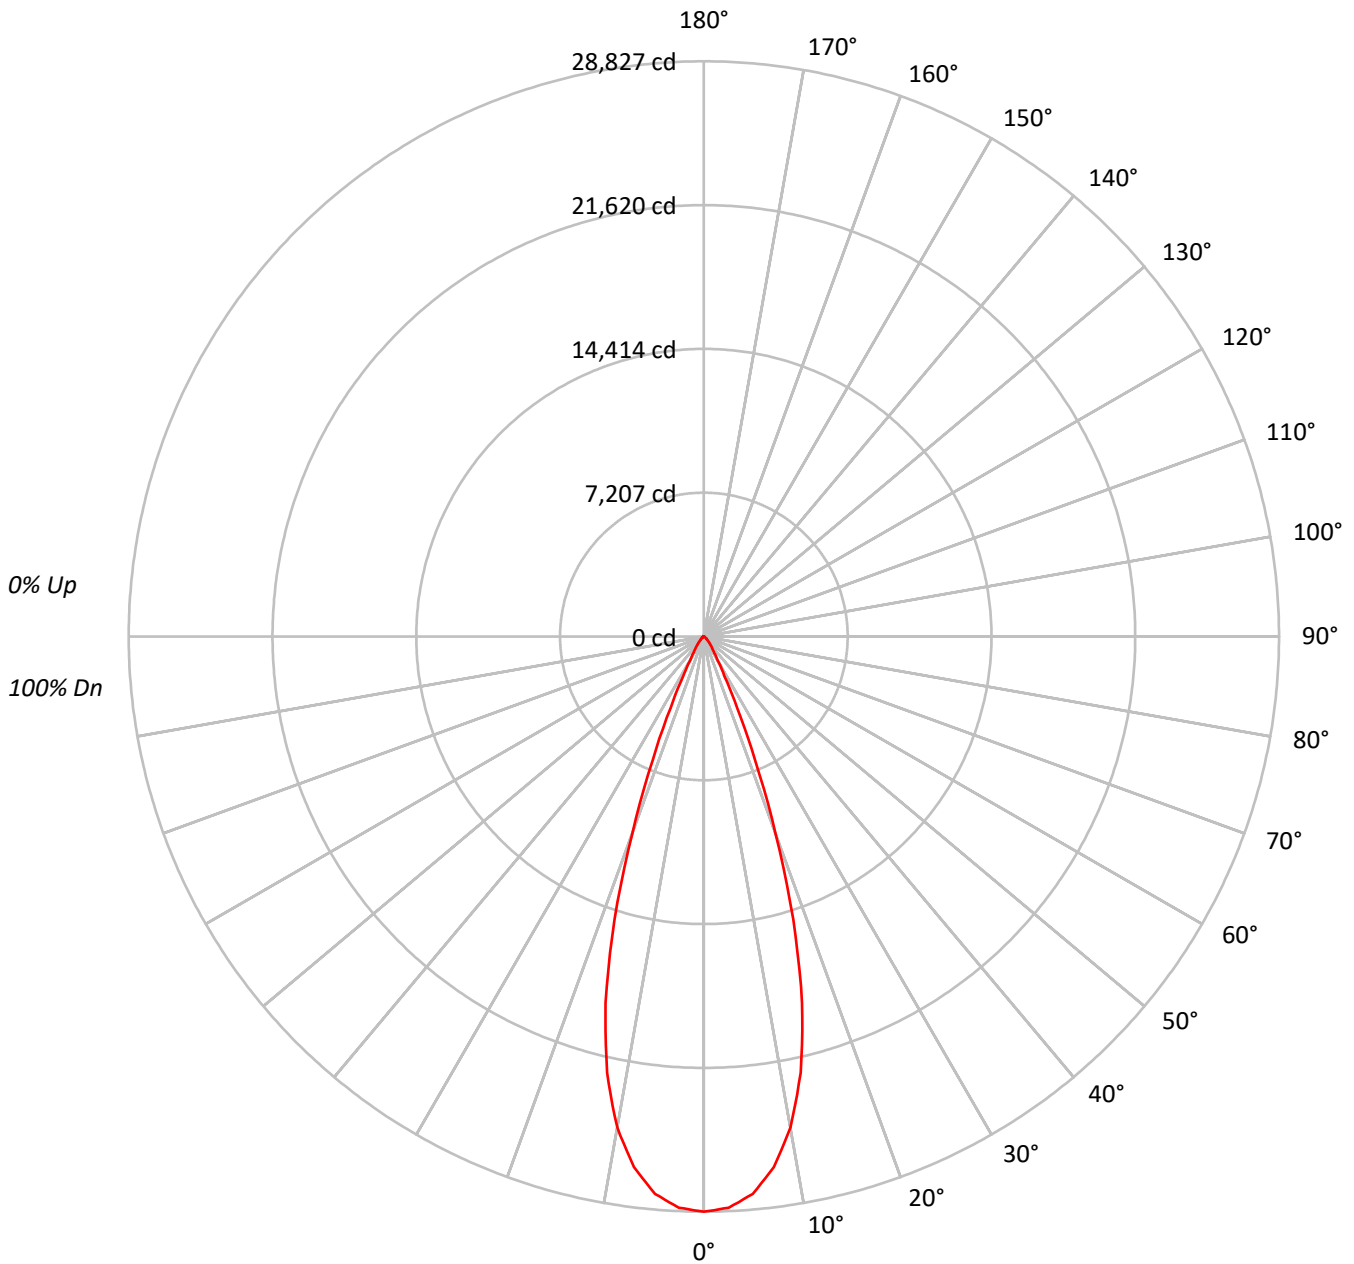



TEST NUMBER: P772762

CATALOG NUMBER: LD6D85BD010-EU6DR3570959050-6LBS1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	115	112	110	108	112	110	108	107	106	105	103	103	101	100	99	98	98	96			96																
2	110	106	103	101	108	105	102	99	102	99	97	99	97	95	96	95	93	92			92																
3	106	101	97	94	105	100	96	93	97	95	92	95	93	91	93	91	89	88			88																
4	103	97	92	89	101	96	92	89	94	90	88	92	89	87	90	88	86	84			84																
5	99	93	88	85	98	92	87	84	90	86	84	89	85	83	87	84	82	81			81																
6	96	89	84	81	94	88	84	81	87	83	80	85	82	80	84	81	79	78			78																
7	93	85	81	78	91	85	80	77	84	80	77	83	79	77	82	79	76	75			75																
8	90	82	78	74	88	82	77	74	81	77	74	80	76	74	79	76	73	72			72																
9	87	79	75	72	86	79	75	72	78	74	71	77	74	71	77	73	71	70			70																
10	84	77	72	69	83	76	72	69	76	72	69	75	71	69	74	71	69	68			68																

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	3149627
5°	3075627
10°	2771948
15°	2151482
20°	1220284
25°	474749
30°	177108
35°	97089
40°	63456
45°	38630
50°	24579
55°	17373
60°	12718
65°	6903
70°	511
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 38630 cd/sqm



TEST NUMBER: P772762

CATALOG NUMBER: LD6D85BD010-EU6DR3570959050-6LBS1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	2579.1	24.6
10°-20°	5035.4	48.1
20°-30°	2053.6	19.6
30°-40°	491.5	4.7
40°-50°	204.8	2.0
50°-60°	84.8	0.8
60°-70°	26.5	0.3
70°-80°	0.6	0.0
80°-90°	0.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	9668.1	92.3
0°-40°	10159.6	97.0
0°-60°	10449.2	99.7
0°-90°	10476.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	10476.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	28827	
5°	28042	###
15°	19020	5035
25°	3938	2054
35°	728	491
45°	250	205
55°	91	85
65°	27	27
75°	0	1
85°	0	0
90°	0	



TEST NUMBER: P772762

CATALOG NUMBER: LD6D85BD010-EU6DR3570959050-6LBS1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	28826.7
2.5°	28653.8
5°	28042.3
7.5°	26822.4
10°	24984.6
12.5°	22397.0
15°	19020.3
17.5°	14890.5
20°	10495.0
22.5°	6692.2
25°	3938.0
27.5°	2226.0
30°	1403.8
32.5°	985.7
35°	727.9
37.5°	562.8
40°	444.9
42.5°	342.7
45°	250.0
47.5°	187.1
50°	144.6
52.5°	114.8
55°	91.2
57.5°	73.9
60°	58.2
62.5°	42.4
65°	26.7
67.5°	9.4
70°	1.6
72.5°	1.6
75°	0.0
77.5°	0.0
80°	0.0
82.5°	1.6
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)