

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P773711

Luminaire Tested: LD6D90BD010-EU6DR5070959024-6LBS1MW

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P773711
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-44)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D90BD010-EU6DR5070959024-6LBS1MW
Description: 6 INCH ROUND SHALLOW MATTE WHITE TRIM, WITH 50° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 9702.6 lumens
Efficiency: N/A
Efficacy: 98.1 lumens/watt
Spacing Criteria (0/90/45): 0.8 / 0.8 / 0.73
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 98.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P773711

CATALOG NUMBER: LD6D90BD010-EU6DR5070959024-6LBS1MW

Luminous Intensity Polar Plot

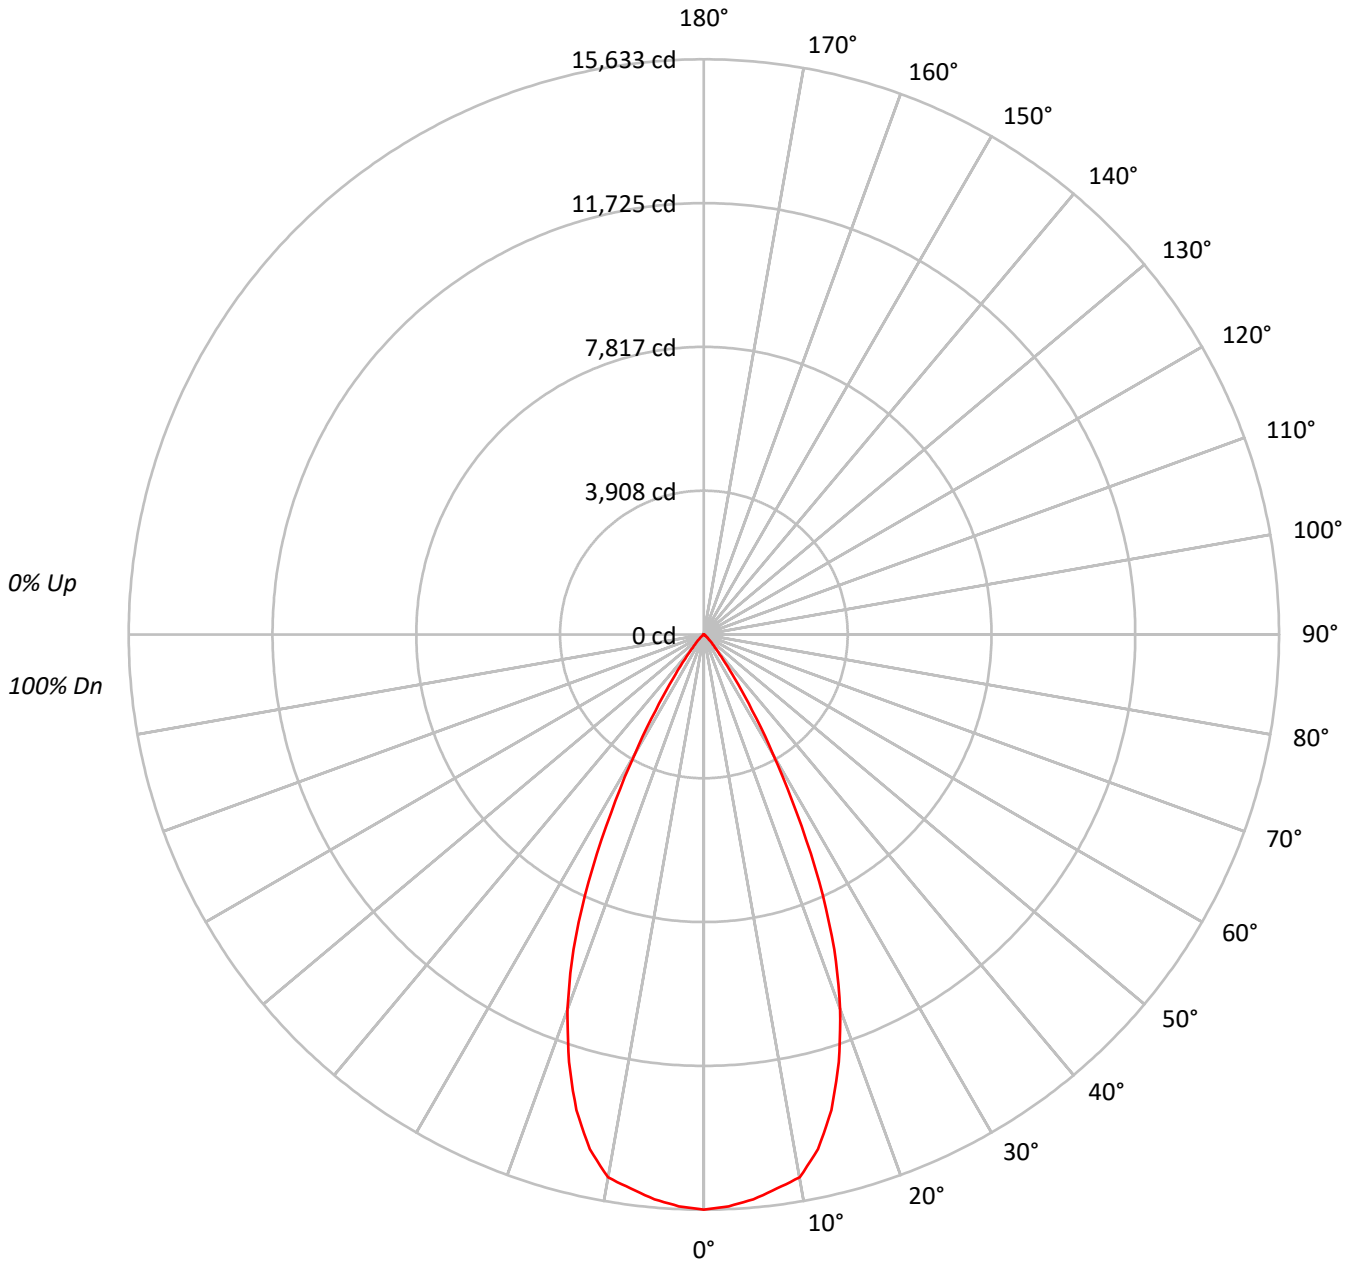



TEST NUMBER: P773711

CATALOG NUMBER: LD6D90BD010-EU6DR5070959024-6LBS1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	114	112	109	107	112	110	108	106	106	104	102	102	101	99	98	97	97	95			95																
2	109	105	101	98	107	103	100	97	100	98	95	97	95	93	95	93	91	90			90																
3	105	99	95	91	103	98	94	90	95	92	89	93	90	88	91	88	86	85			85																
4	100	94	89	85	99	93	88	85	90	87	84	89	85	83	87	84	82	80			80																
5	96	89	84	80	95	88	83	79	86	82	79	85	81	78	83	80	77	76			76																
6	92	84	79	75	91	83	79	75	82	78	74	81	77	74	79	76	74	72			72																
7	88	80	75	71	87	79	74	71	78	74	71	77	73	70	76	73	70	69			69																
8	85	76	71	67	84	76	71	67	75	70	67	74	70	67	73	69	66	65			65																
9	81	73	68	64	80	72	67	64	71	67	64	71	67	64	70	66	63	62			62																
10	78	70	64	61	77	69	64	61	68	64	61	68	64	61	67	63	60	59			59																

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1708106
5°	1690195
10°	1662364
15°	1513717
20°	1259584
25°	894115
30°	473252
35°	192858
40°	71629
45°	32789
50°	13445
55°	7029
60°	3453
65°	1034
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 32789 cd/sqm



TEST NUMBER: P773711

CATALOG NUMBER: LD6D90BD010-EU6DR5070959024-6LBS1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1456.6	15.0
10°-20°	3681.2	37.9
20°-30°	3306.6	34.1
30°-40°	1035.3	10.7
40°-50°	181.3	1.9
50°-60°	36.1	0.4
60°-70°	5.5	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	8444.4	87.0
0°-40°	9479.7	97.7
0°-60°	9697.1	99.9
0°-90°	9702.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	9702.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	15633	
5°	15410	###
15°	13382	3681
25°	7417	3307
35°	1446	1035
45°	212	181
55°	37	36
65°	4	5
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P773711

CATALOG NUMBER: LD6D90BD010-EU6DR5070959024-6LBS1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	15633.3
2.5°	15555.5
5°	15410.5
7.5°	15189.1
10°	14983.5
12.5°	14324.5
15°	13382.1
17.5°	12185.3
20°	10833.0
22.5°	9268.5
25°	7416.6
27.5°	5452.7
30°	3751.1
32.5°	2442.3
35°	1445.9
37.5°	830.4
40°	502.2
42.5°	326.9
45°	212.2
47.5°	129.2
50°	79.1
52.5°	54.0
55°	36.9
57.5°	25.0
60°	15.8
62.5°	9.2
65°	4.0
67.5°	1.3
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)