

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P773498

Luminaire Tested: LD6D90BD010-EU6DR3570959030-6LBDP1LI

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P773498  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-20)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D90BD010-EU6DR3570959030-6LBDP1LI  
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR CLEAR TRIM, WITH 35° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 10947.5 lumens  
Efficiency: N/A  
Efficacy: 110.7 lumens/watt  
Spacing Criteria (0/90/45): 0.6 / 0.6 / 0.54  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct


Input Watts (W): 98.9  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



Downlight

TEST NUMBER: P773498  
CATALOG NUMBER: LD6D90BD010-EU6DR3570959030-6LBDP1LI

### Luminous Intensity Polar Plot

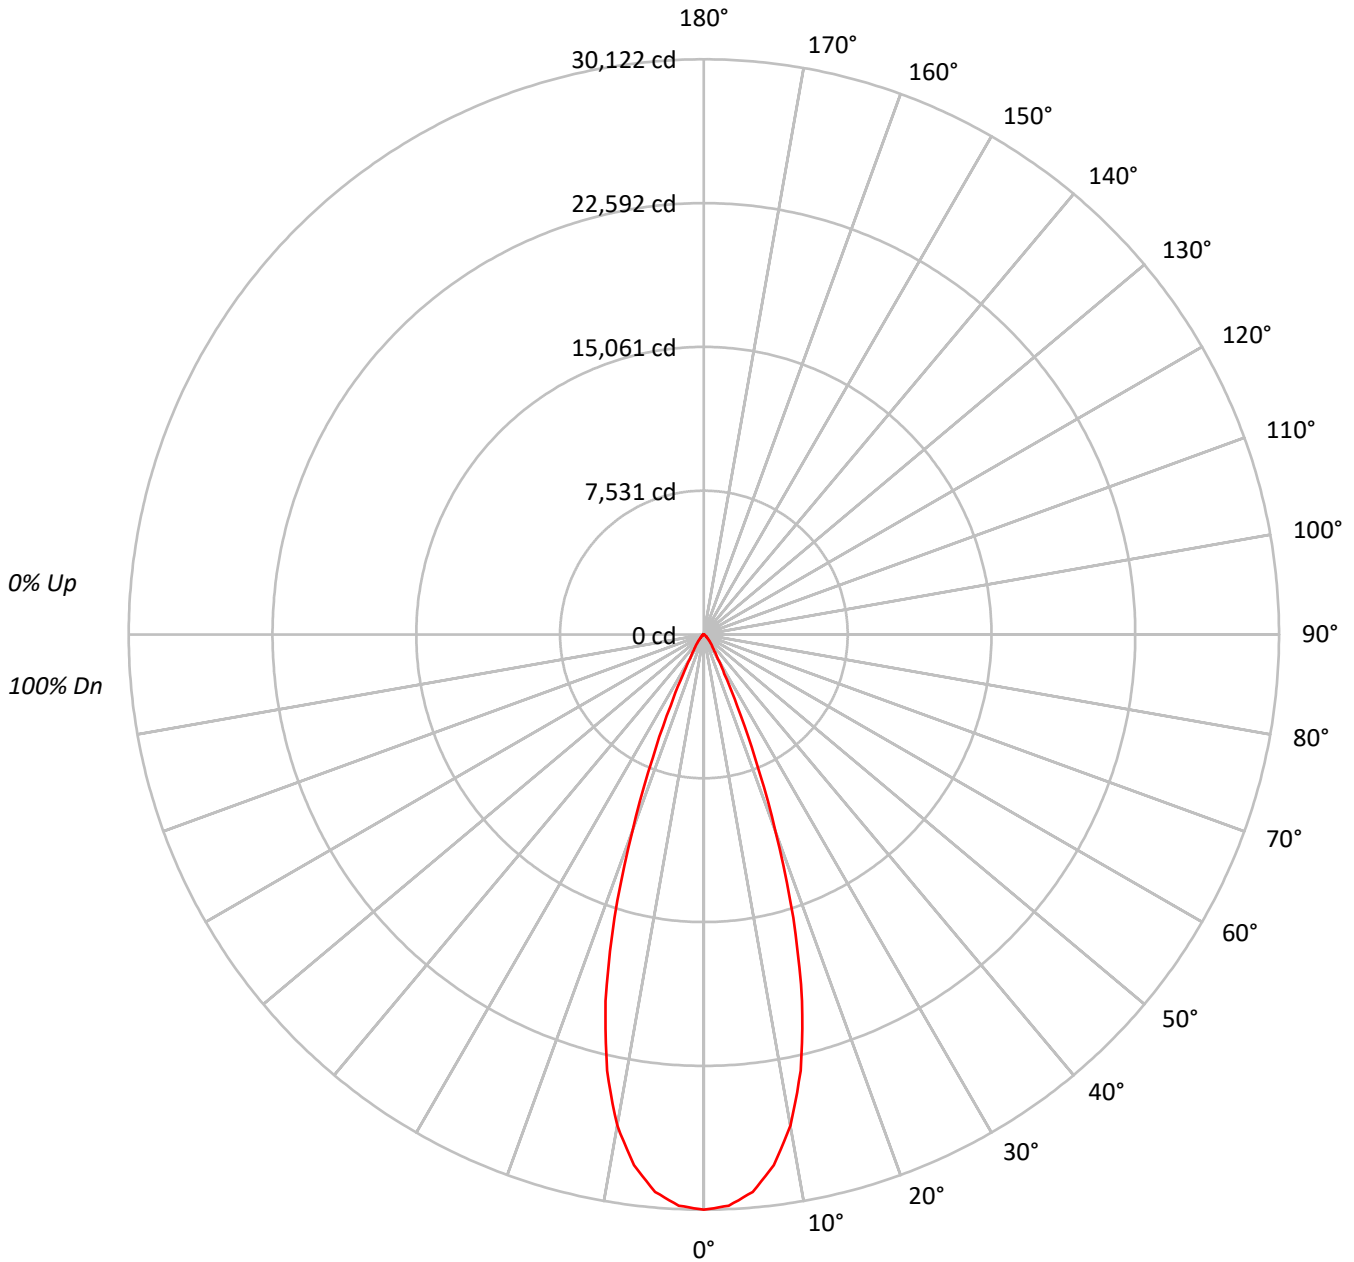



TEST NUMBER: P773498  
 CATALOG NUMBER: LD6D90BD010-EU6DR3570959030-6LBDP1LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	115	112	110	108	112	110	108	107	106	105	103	103	101	100	99	98	98	96			96																
2	110	106	103	101	108	105	102	99	102	99	97	99	97	95	96	95	93	92			92																
3	106	101	97	94	105	100	96	93	97	95	92	95	93	91	93	91	89	88			88																
4	103	97	92	89	101	96	92	89	94	90	88	92	89	87	90	88	86	84			84																
5	99	93	88	85	98	92	87	84	90	86	84	89	85	83	87	84	82	81			81																
6	96	89	84	81	94	88	84	81	87	83	80	85	82	80	84	81	79	78			78																
7	93	85	81	78	91	85	80	77	84	80	77	83	79	77	82	79	76	75			75																
8	90	82	78	74	88	82	77	74	81	77	74	80	76	74	79	76	73	72			72																
9	87	79	75	72	86	79	75	72	78	74	71	77	74	71	77	73	71	70			70																
10	84	77	72	69	83	76	72	69	76	72	69	75	71	69	74	71	69	68			68																

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	3291152
5°	3213821
10°	2896508
15°	2248150
20°	1275118
25°	496075
30°	185069
35°	101451
40°	66309
45°	40360
50°	25684
55°	18154
60°	13286
65°	7213
70°	511
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 40360 cd/sqm



TEST NUMBER: P773498

CATALOG NUMBER: LD6D90BD010-EU6DR3570959030-6LBDP1LI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	2694.9	24.6
10°-20°	5261.7	48.1
20°-30°	2145.9	19.6
30°-40°	513.6	4.7
40°-50°	214.0	2.0
50°-60°	88.6	0.8
60°-70°	27.7	0.3
70°-80°	0.6	0.0
80°-90°	0.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	10102.6	92.3
0°-40°	10616.1	97.0
0°-60°	10918.7	99.7
0°-90°	10947.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	10947.5	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	30122	
5°	29302	###
15°	19875	5262
25°	4115	2146
35°	761	514
45°	261	214
55°	95	89
65°	28	28
75°	0	1
85°	0	0
90°	0	



TEST NUMBER: P773498

CATALOG NUMBER: LD6D90BD010-EU6DR3570959030-6LBDP1LI

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	30122.0
2.5°	29941.3
5°	29302.3
7.5°	28027.6
10°	26107.3
12.5°	23403.4
15°	19874.9
17.5°	15559.6
20°	10966.6
22.5°	6992.9
25°	4114.9
27.5°	2326.0
30°	1466.9
32.5°	1030.0
35°	760.6
37.5°	588.1
40°	464.9
42.5°	358.1
45°	261.2
47.5°	195.5
50°	151.1
52.5°	119.9
55°	95.3
57.5°	77.2
60°	60.8
62.5°	44.4
65°	27.9
67.5°	9.9
70°	1.6
72.5°	1.6
75°	0.0
77.5°	0.0
80°	0.0
82.5°	1.6
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)