

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P773357

Luminaire Tested: LD6D90BD010-EU6DR2570959035-6LBS1B

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P773357  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-4)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D90BD010-EU6DR2570959035-6LBS1B  
Description: 6 INCH ROUND SHALLOW SPECULAR BLACK TRIM, WITH 25° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 9712.7 lumens  
Efficiency: N/A  
Efficacy: 98.2 lumens/watt  
Spacing Criteria (0/90/45): 0.42 / 0.42 / 0.45  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 98.9  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight

TEST NUMBER: P773357

CATALOG NUMBER: LD6D90BD010-EU6DR2570959035-6LBS1B

### Luminous Intensity Polar Plot

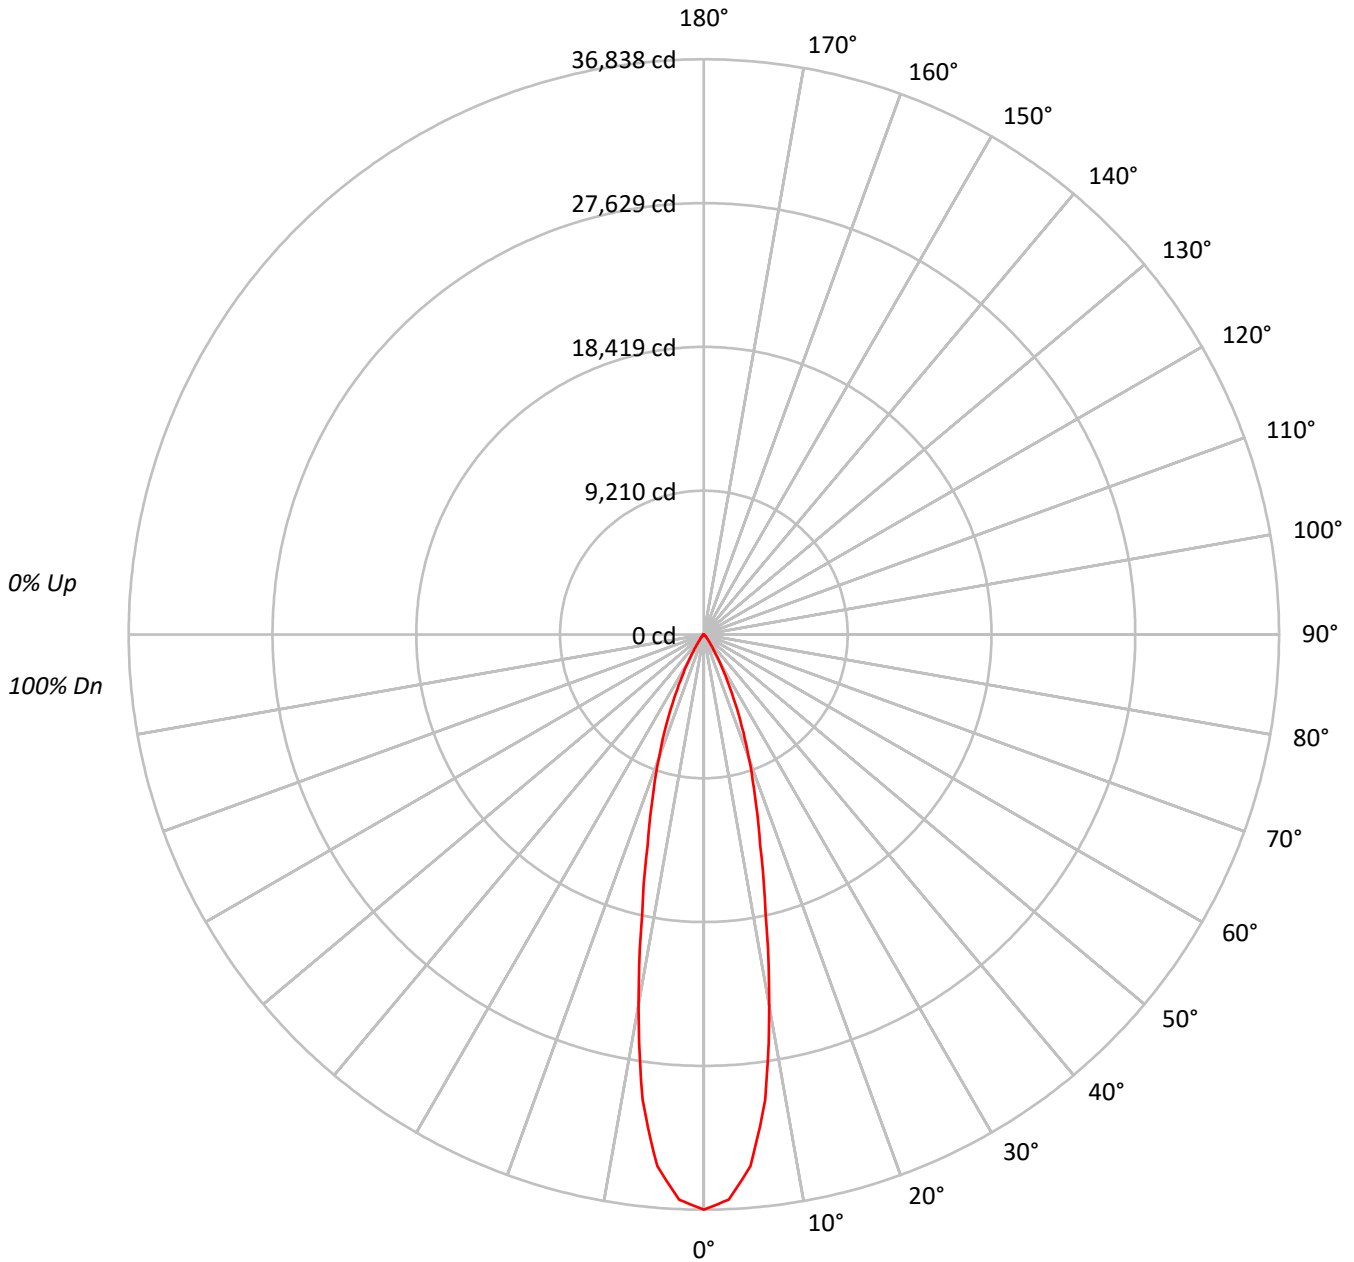



TEST NUMBER: P773357

CATALOG NUMBER: LD6D90BD010-EU6DR2570959035-6LBS1B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96																			
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92																			
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89																			
4	103	97	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85																			
5	100	93	89	86	98	93	89	86	91	87	85	89	86	84	88	85	83	82																			
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79																			
7	93	87	82	79	92	86	82	79	85	81	78	84	80	78	83	80	78	77																			
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74																			
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72																			
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	4024991
5°	3748776
10°	2674105
15°	1574946
20°	979948
25°	537800
30°	245956
35°	93141
40°	42176
45°	25356
50°	10522
55°	6781
60°	4742
65°	3206
70°	479
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 25356 cd/sqm



TEST NUMBER: P773357

CATALOG NUMBER: LD6D90BD010-EU6DR2570959035-6LBS1B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	2937.5	30.2
10°-20°	3978.6	41.0
20°-30°	2105.4	21.7
30°-40°	519.7	5.4
40°-50°	126.8	1.3
50°-60°	33.4	0.3
60°-70°	11.2	0.1
70°-80°	0.2	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	9021.5	92.9
0°-40°	9541.2	98.2
0°-60°	9701.4	99.9
0°-90°	9712.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	9712.7	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	36838	
5°	34180	###
15°	13923	3979
25°	4461	2105
35°	698	520
45°	164	127
55°	36	33
65°	12	11
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P773357

CATALOG NUMBER: LD6D90BD010-EU6DR2570959035-6LBS1B

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	36838.4
2.5°	36233.0
5°	34179.8
7.5°	30054.8
10°	24102.7
12.5°	18220.2
15°	13923.4
17.5°	10851.3
20°	8428.0
22.5°	6320.6
25°	4461.0
27.5°	2991.5
30°	1949.5
32.5°	1186.1
35°	698.3
37.5°	427.4
40°	295.7
42.5°	226.1
45°	164.1
47.5°	99.1
50°	61.9
52.5°	44.9
55°	35.6
57.5°	27.9
60°	21.7
62.5°	17.0
65°	12.4
67.5°	4.6
70°	1.5
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)