

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P773683

Luminaire Tested: LD6D90BD010-EU6DR4570959040-6LBS1H

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P773683  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-36)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D90BD010-EU6DR4570959040-6LBS1H  
Description: 6 INCH ROUND SHALLOW SEMI-SPECULAR CLEAR TRIM, WITH 45° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 12448.2 lumens  
Efficiency: N/A  
Efficacy: 125.9 lumens/watt  
Spacing Criteria (0/90/45): 0.75 / 0.75 / 0.69  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 98.9  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



Downlight

TEST NUMBER: P773683  
CATALOG NUMBER: LD6D90BD010-EU6DR4570959040-6LBS1H

### Luminous Intensity Polar Plot

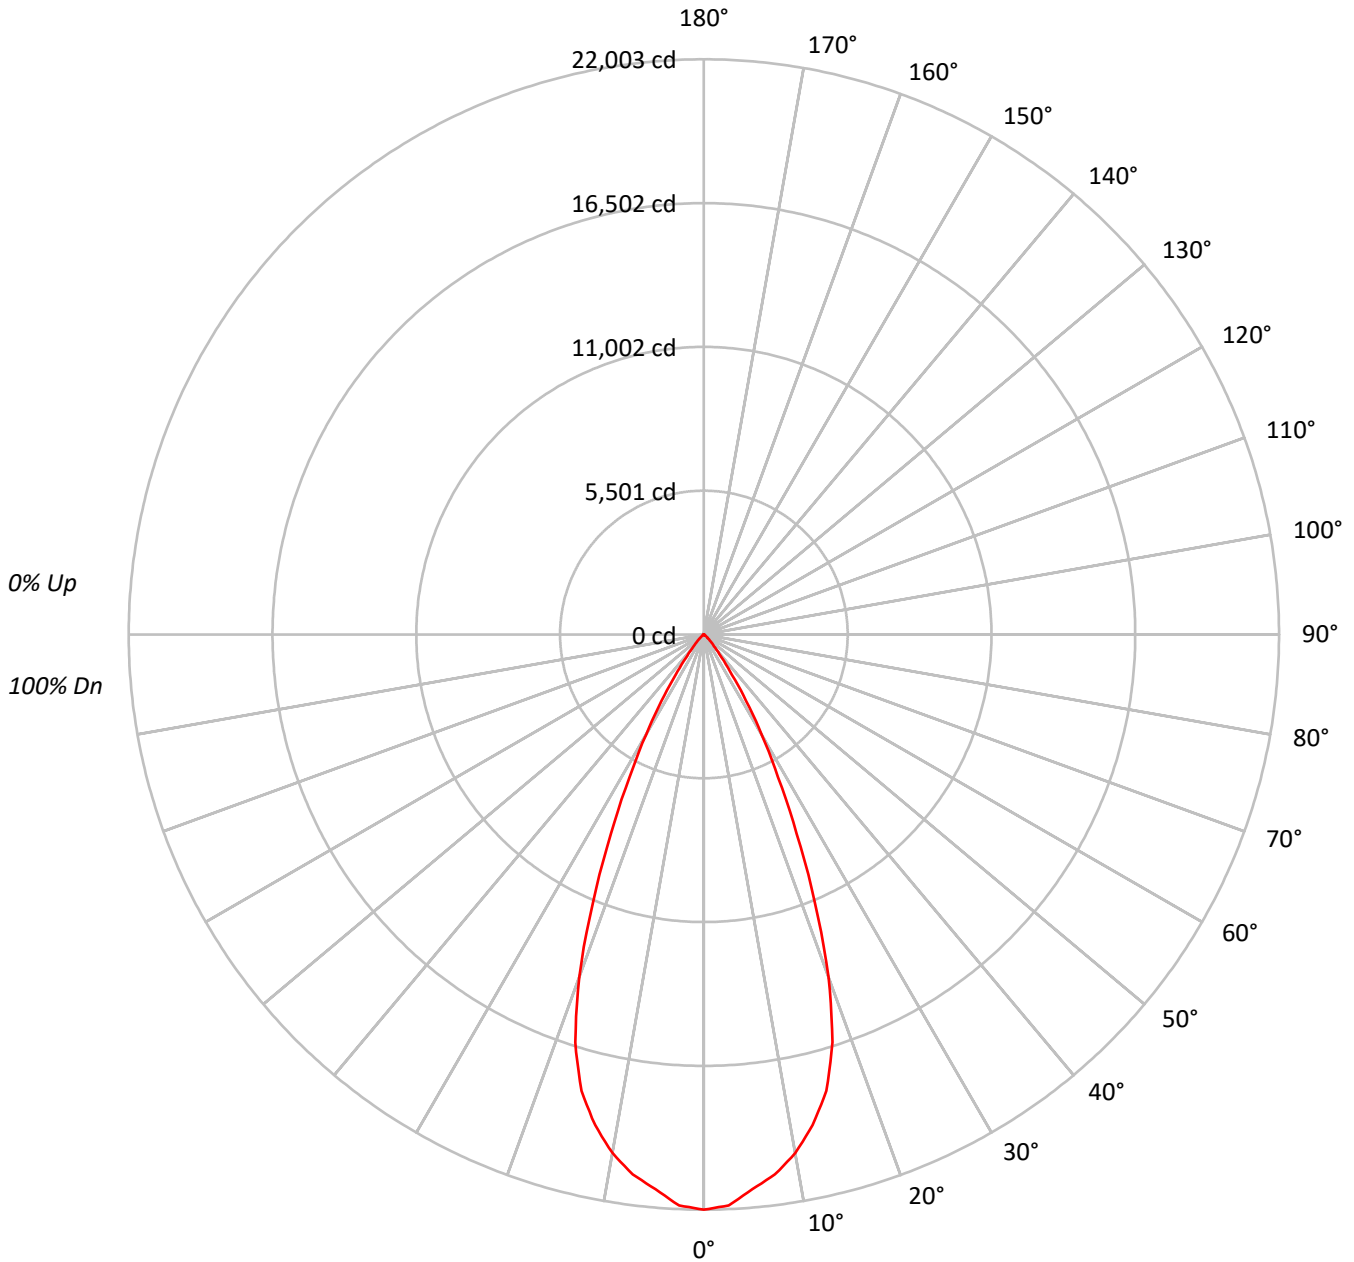



TEST NUMBER: P773683

CATALOG NUMBER: LD6D90BD010-EU6DR4570959040-6LBS1H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     |     |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |     | 30  |     |     |     | 10  |     |     | 0   |     |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 0   |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 | 100 | 100 | 100 |
| 1   | 114 | 112 | 110 | 108 | 112 | 110 | 108 | 106 | 106 | 104 | 103 | 102 | 101 | 100 | 98  | 98  | 97  | 95  | 95  | 95  | 95  |
| 2   | 109 | 105 | 102 | 99  | 107 | 103 | 100 | 98  | 100 | 98  | 95  | 97  | 95  | 93  | 95  | 93  | 91  | 90  | 90  | 90  | 90  |
| 3   | 105 | 99  | 95  | 91  | 103 | 98  | 94  | 91  | 95  | 92  | 89  | 93  | 90  | 88  | 91  | 89  | 87  | 85  | 85  | 85  | 85  |
| 4   | 100 | 94  | 89  | 85  | 99  | 93  | 88  | 85  | 91  | 87  | 84  | 89  | 86  | 83  | 87  | 84  | 82  | 81  | 81  | 81  | 81  |
| 5   | 96  | 89  | 84  | 80  | 95  | 88  | 83  | 80  | 86  | 82  | 79  | 85  | 81  | 79  | 83  | 80  | 78  | 77  | 77  | 77  | 77  |
| 6   | 92  | 85  | 80  | 76  | 91  | 84  | 79  | 76  | 83  | 78  | 75  | 81  | 77  | 75  | 80  | 77  | 74  | 73  | 73  | 73  | 73  |
| 7   | 89  | 81  | 75  | 72  | 87  | 80  | 75  | 72  | 79  | 74  | 71  | 78  | 74  | 71  | 77  | 73  | 71  | 69  | 69  | 69  | 69  |
| 8   | 85  | 77  | 72  | 68  | 84  | 76  | 71  | 68  | 75  | 71  | 68  | 74  | 70  | 67  | 73  | 70  | 67  | 66  | 66  | 66  | 66  |
| 9   | 82  | 73  | 68  | 65  | 81  | 73  | 68  | 65  | 72  | 68  | 65  | 71  | 67  | 64  | 71  | 67  | 64  | 63  | 63  | 63  | 63  |
| 10  | 79  | 70  | 65  | 62  | 78  | 70  | 65  | 62  | 69  | 65  | 62  | 68  | 64  | 61  | 68  | 64  | 61  | 60  | 60  | 60  | 60  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |         |
|-----|---------|
|     | 0°      |
| 0°  | 2404021 |
| 5°  | 2335573 |
| 10° | 2234514 |
| 15° | 2045052 |
| 20° | 1622437 |
| 25° | 1012911 |
| 30° | 558286  |
| 35° | 250680  |
| 40° | 98728   |
| 45° | 46525   |
| 50° | 22063   |
| 55° | 11544   |
| 60° | 5682    |
| 65° | 1344    |
| 70° | 543     |
| 75° | 0       |
| 80° | 0       |
| 85° | 0       |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 46525 cd/sqm



TEST NUMBER: P773683

CATALOG NUMBER: LD6D90BD010-EU6DR4570959040-6LBS1H

**ZONAL LUMENS:**

| Zone      | Lumens  | % Fixture |
|-----------|---------|-----------|
| 0°-10°    | 2000.9  | 16.1      |
| 10°-20°   | 4924.3  | 39.6      |
| 20°-30°   | 3899.6  | 31.3      |
| 30°-40°   | 1298.6  | 10.4      |
| 40°-50°   | 257.7   | 2.1       |
| 50°-60°   | 58.5    | 0.5       |
| 60°-70°   | 8.4     | 0.1       |
| 70°-80°   | 0.2     | 0.0       |
| 80°-90°   | 0.0     | 0.0       |
| 90°-100°  | 0.0     | 0.0       |
| 100°-110° | 0.0     | 0.0       |
| 110°-120° | 0.0     | 0.0       |
| 120°-130° | 0.0     | 0.0       |
| 130°-140° | 0.0     | 0.0       |
| 140°-150° | 0.0     | 0.0       |
| 150°-160° | 0.0     | 0.0       |
| 160°-170° | 0.0     | 0.0       |
| 170°-180° | 0.0     | 0.0       |
| 0°-30°    | 10824.8 | 87.0      |
| 0°-40°    | 12123.4 | 97.4      |
| 0°-60°    | 12439.6 | 99.9      |
| 0°-90°    | 12448.2 | 100.0     |
| 90°-120°  | 0.0     | 0.0       |
| 90°-150°  | 0.0     | 0.0       |
| 90°-180°  | 0.0     | 0.0       |
| 0°-180°   | 12448.2 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°    | Flux |
|-----|-------|------|
| 0°  | 22003 |      |
| 5°  | 21295 | ###  |
| 15° | 18079 | 4924 |
| 25° | 8402  | 3900 |
| 35° | 1879  | 1299 |
| 45° | 301   | 258  |
| 55° | 61    | 59   |
| 65° | 5     | 8    |
| 75° | 0     | 0    |
| 85° | 0     | 0    |
| 90° | 0     |      |



TEST NUMBER: P773683

CATALOG NUMBER: LD6D90BD010-EU6DR4570959040-6LBS1H

**CANDELA DISTRIBUTION (FULL):**

|       | 0°      |
|-------|---------|
| 0°    | 22002.6 |
| 2.5°  | 21859.0 |
| 5°    | 21294.8 |
| 7.5°  | 20829.3 |
| 10°   | 20140.5 |
| 12.5° | 19223.3 |
| 15°   | 18079.4 |
| 17.5° | 16359.2 |
| 20°   | 13953.7 |
| 22.5° | 11087.8 |
| 25°   | 8402.0  |
| 27.5° | 6152.2  |
| 30°   | 4425.1  |
| 32.5° | 3009.5  |
| 35°   | 1879.4  |
| 37.5° | 1114.5  |
| 40°   | 692.2   |
| 42.5° | 455.1   |
| 45°   | 301.1   |
| 47.5° | 193.8   |
| 50°   | 129.8   |
| 52.5° | 86.5    |
| 55°   | 60.6    |
| 57.5° | 39.8    |
| 60°   | 26.0    |
| 62.5° | 13.8    |
| 65°   | 5.2     |
| 67.5° | 1.7     |
| 70°   | 1.7     |
| 72.5° | 0.0     |
| 75°   | 0.0     |
| 77.5° | 0.0     |
| 80°   | 0.0     |
| 82.5° | 0.0     |
| 85°   | 0.0     |
| 87.5° | 0.0     |
| 90°   | 0.0     |

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)