

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P773997

Luminaire Tested: LD6D90BD010-EU6DR6570959040-6LBS1MW

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P773997
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D90BD010-EU6DR6570959040-6LBS1MW
Description: 6 INCH ROUND SHALLOW MATTE WHITE TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 10119.9 lumens
Efficiency: N/A
Efficacy: 102.3 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96
Luminous Opening: Circular (Dia: 0.48' x H: 0')
CIE Type: Direct

Input Watts (W): 98.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P773997

CATALOG NUMBER: LD6D90BD010-EU6DR6570959040-6LBS1MW

Luminous Intensity Polar Plot

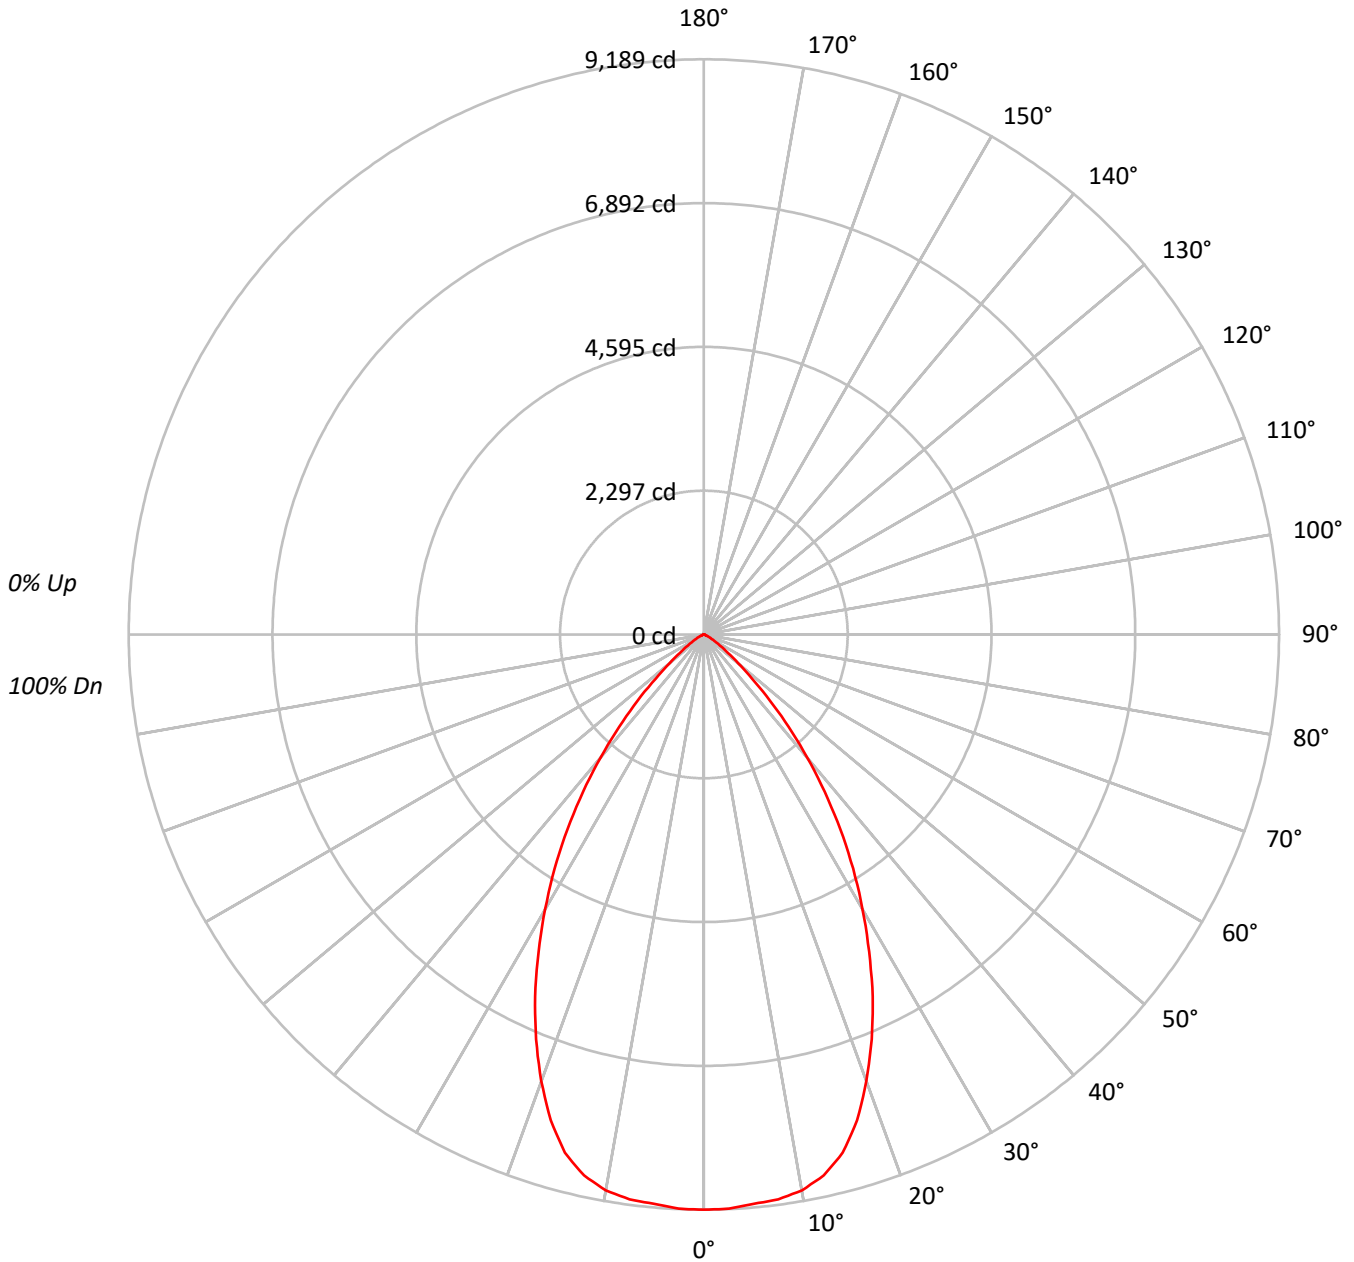



TEST NUMBER: P773997

CATALOG NUMBER: LD6D90BD010-EU6DR6570959040-6LBS1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	536650
5°	535293
10°	534835
15°	518347
20°	471890
25°	411227
30°	342024
35°	271004
40°	195596
45°	123571
50°	64411
55°	34233
60°	17977
65°	9895
70°	4150
75°	4581
80°	3195
85°	2747

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 123571 cd/sqm



TEST NUMBER: P773997

CATALOG NUMBER: LD6D90BD010-EU6DR6570959040-6LBS1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	868.9	8.6
10°-20°	2379.5	23.5
20°-30°	2908.6	28.7
30°-40°	2359.9	23.3
40°-50°	1176.0	11.6
50°-60°	328.0	3.2
60°-70°	74.6	0.7
70°-80°	19.4	0.2
80°-90°	5.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	6157.0	60.8
0°-40°	8516.9	84.2
0°-60°	10020.9	99.0
0°-90°	10119.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	10119.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	9189	
5°	9130	869
15°	8573	2380
25°	6381	2909
35°	3801	2360
45°	1496	1176
55°	336	328
65°	72	75
75°	20	19
85°	4	5
90°	0	



TEST NUMBER: P773997

CATALOG NUMBER: LD6D90BD010-EU6DR6570959040-6LBS1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	9188.6
2.5°	9181.8
5°	9130.5
7.5°	9100.8
10°	9018.4
12.5°	8851.0
15°	8572.8
17.5°	8138.1
20°	7592.5
22.5°	7003.8
25°	6381.4
27.5°	5715.7
30°	5071.6
32.5°	4435.6
35°	3801.0
37.5°	3167.7
40°	2565.5
42.5°	2001.1
45°	1496.1
47.5°	1042.4
50°	708.9
52.5°	488.8
55°	336.2
57.5°	226.8
60°	153.9
62.5°	106.7
65°	71.6
67.5°	36.5
70°	24.3
72.5°	23.0
75°	20.3
77.5°	13.5
80°	9.5
82.5°	6.8
85°	4.1
87.5°	2.7
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)