

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P774068

Luminaire Tested: LD6D90BD010-EU6DR7070959040-6LBDP1B

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P774068
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-73)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D90BD010-EU6DR7070959040-6LBDP1B
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 70° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6781.2 lumens
Efficiency: N/A
Efficacy: 68.6 lumens/watt
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.82
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct


Input Watts (W): 98.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



Downlight

TEST NUMBER: P774068
CATALOG NUMBER: LD6D90BD010-EU6DR7070959040-6LBDP1B

Luminous Intensity Polar Plot

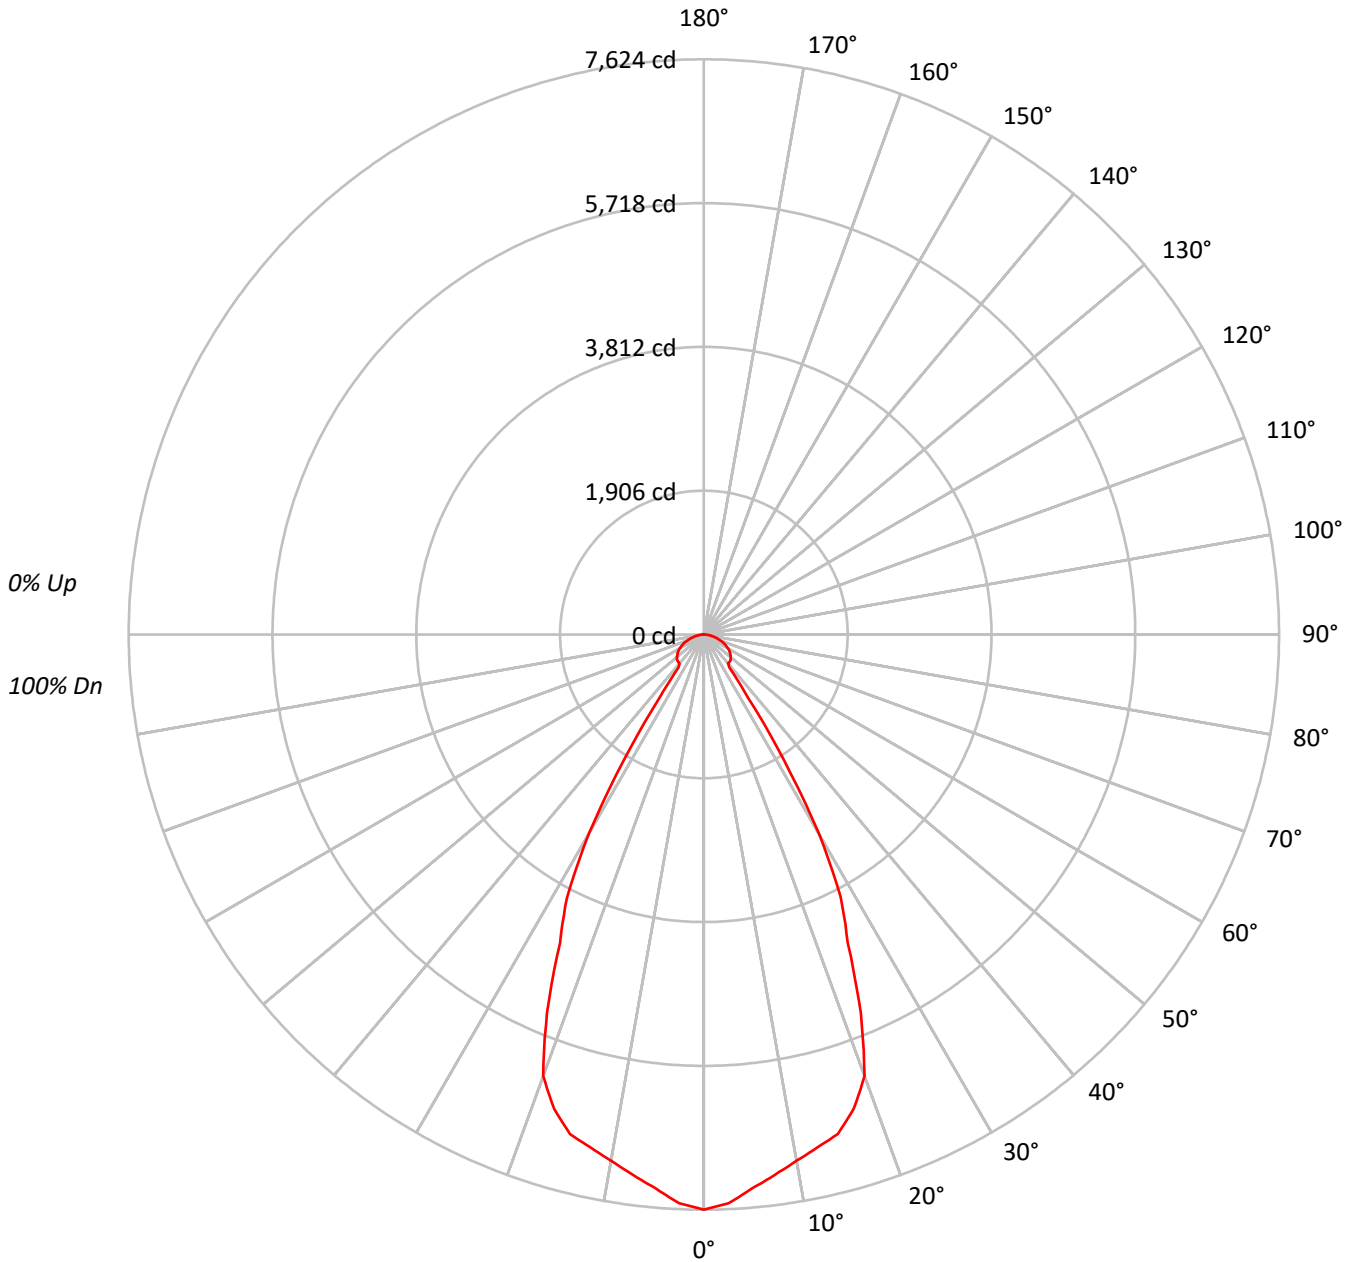



TEST NUMBER: P774068

CATALOG NUMBER: LD6D90BD010-EU6DR7070959040-6LBDP1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	112	109	106	103	110	107	104	102	103	101	99	99	97	96	95	94	93	91																			
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	85	83																			
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78	76																			
4	94	86	80	75	92	85	79	74	82	77	73	80	76	73	78	75	72	70																			
5	89	80	74	69	87	79	73	69	77	72	68	75	71	67	74	70	67	65																			
6	85	75	68	64	83	74	68	64	73	67	63	71	66	63	70	66	62	61																			
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57																			
8	77	66	60	56	75	66	60	56	65	59	55	64	59	55	63	58	55	53																			
9	73	63	57	52	72	62	56	52	61	56	52	60	55	52	60	55	52	50																			
10	70	59	53	49	69	59	53	49	58	53	49	57	52	49	57	52	49	48																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	833004
5°	808251
10°	785722
15°	775415
20°	724078
25°	543960
30°	384534
35°	136210
40°	71614
45°	76286
50°	78990
55°	80482
60°	80984
65°	79266
70°	74817
75°	69317
80°	61537
85°	49894

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 57.5°
 Luminance: 80995 cd/sqm



TEST NUMBER: P774068

CATALOG NUMBER: LD6D90BD010-EU6DR7070959040-6LBDP1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	695.1	10.3
10°-20°	1906.6	28.1
20°-30°	2099.8	31.0
30°-40°	802.3	11.8
40°-50°	378.8	5.6
50°-60°	376.6	5.6
60°-70°	301.5	4.4
70°-80°	173.3	2.6
80°-90°	47.1	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4701.5	69.3
0°-40°	5503.8	81.2
0°-60°	6259.2	92.3
0°-90°	6781.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6781.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	7624	
5°	7369	695
15°	6855	1907
25°	4512	2100
35°	1021	802
45°	494	379
55°	422	377
65°	307	302
75°	164	173
85°	40	47
90°	0	



TEST NUMBER: P774068

CATALOG NUMBER: LD6D90BD010-EU6DR7070959040-6LBDP1B

CANDELA DISTRIBUTION (FULL):

	0°
0°	7624.0
2.5°	7544.3
5°	7369.3
7.5°	7223.2
10°	7082.0
12.5°	6962.5
15°	6855.1
17.5°	6595.5
20°	6227.4
22.5°	5433.1
25°	4512.1
27.5°	3927.9
30°	3047.9
32.5°	1968.8
35°	1021.2
37.5°	551.6
40°	502.1
42.5°	498.5
45°	493.7
47.5°	482.8
50°	464.7
52.5°	444.2
55°	422.5
57.5°	398.3
60°	370.6
62.5°	339.2
65°	306.6
67.5°	270.4
70°	234.2
72.5°	198.0
75°	164.2
77.5°	129.2
80°	97.8
82.5°	68.8
85°	39.8
87.5°	15.7
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)