

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P774006

Luminaire Tested: LD6D90BD010-EU6DR6570959050-6LBDP1MW

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P774006
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-59)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D90BD010-EU6DR6570959050-6LBDP1MW
Description: 6 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 8791.6 lumens
Efficiency: N/A
Efficacy: 88.9 lumens/watt
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.92
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct


Input Watts (W): 98.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



Downlight

TEST NUMBER: P774006
CATALOG NUMBER: LD6D90BD010-EU6DR6570959050-6LBDP1MW

Luminous Intensity Polar Plot

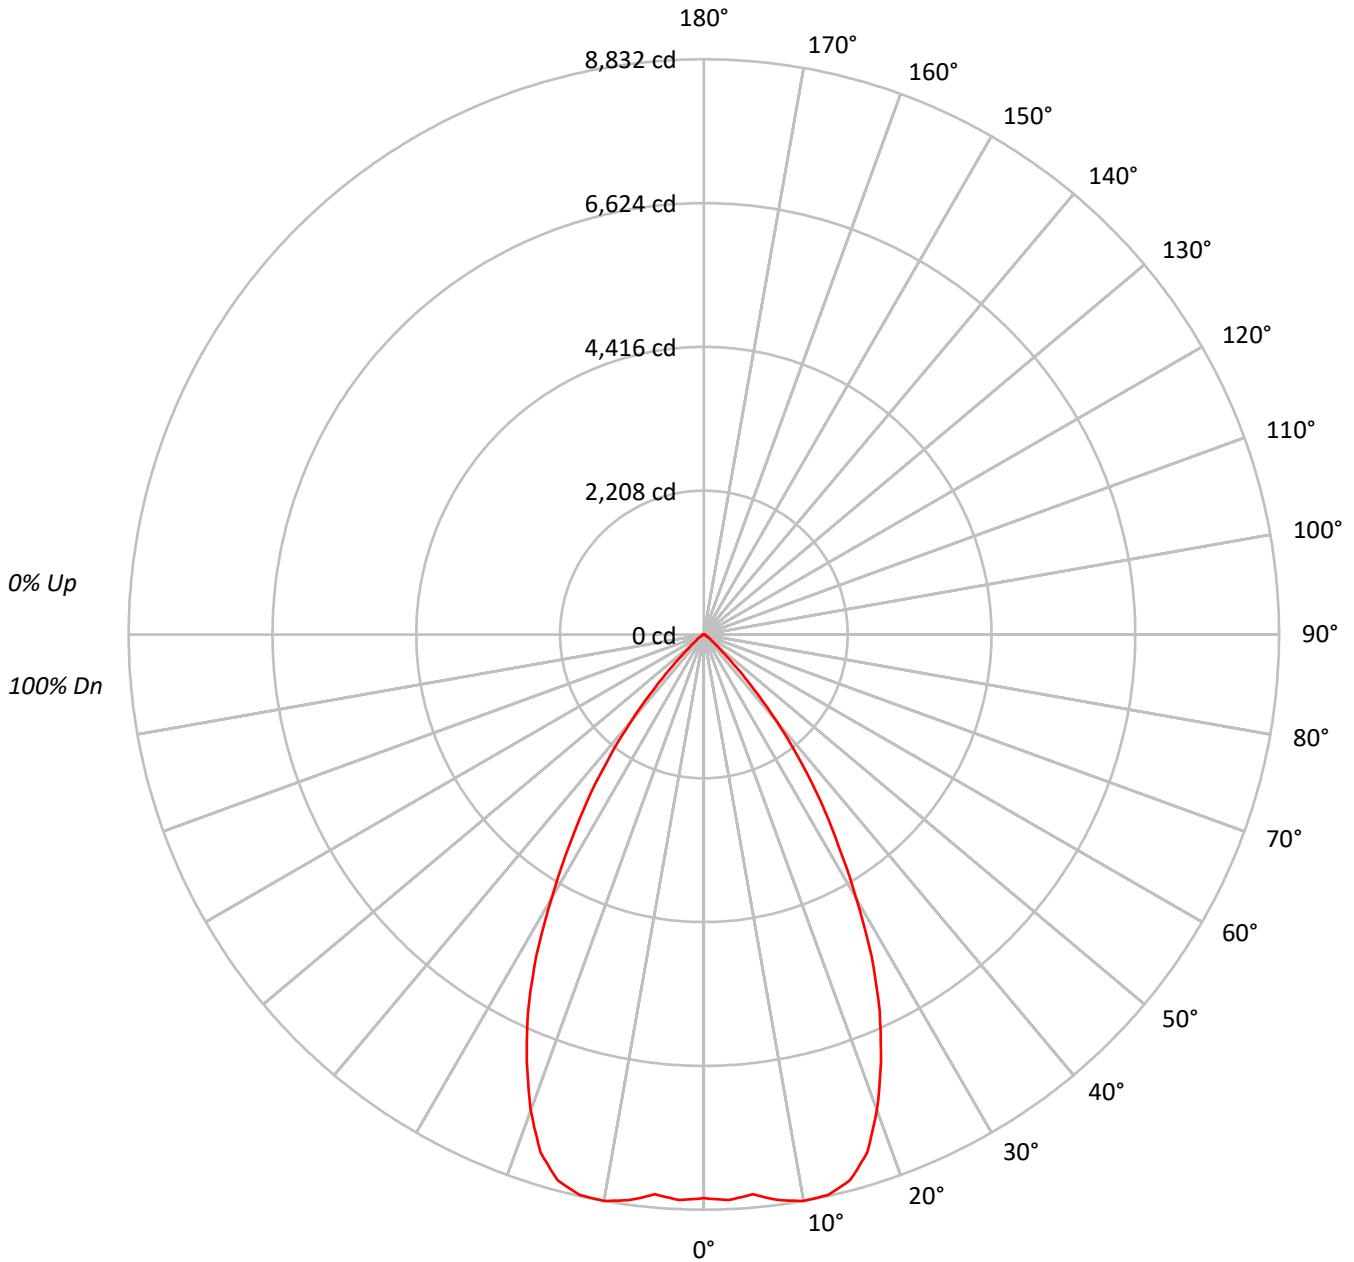



TEST NUMBER: P774006

CATALOG NUMBER: LD6D90BD010-EU6DR6570959050-6LBDP1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93																			
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87																			
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80																			
4	97	89	84	79	95	88	83	79	86	82	78	84	80	77	82	79	76	75																			
5	92	83	78	73	90	83	77	73	81	76	72	79	75	72	77	74	71	69																			
6	87	78	72	68	86	77	72	68	76	71	67	74	70	67	73	69	66	65																			
7	83	73	67	63	81	73	67	63	71	66	62	70	66	62	69	65	62	60																			
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	57																			
9	75	65	59	55	74	65	59	55	64	58	55	63	58	55	62	58	54	53																			
10	71	61	56	52	70	61	55	52	60	55	51	59	55	51	59	54	51	50																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	945761
5°	946533
10°	979866
15°	981488
20°	903626
25°	769930
30°	589410
35°	416408
40°	245794
45°	99788
50°	36172
55°	20154
60°	11560
65°	6360
70°	6677
75°	5192
80°	5411
85°	4638

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 99788 cd/sqm



TEST NUMBER: P774006

CATALOG NUMBER: LD6D90BD010-EU6DR6570959050-6LBDP1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	833.5	9.5
10°-20°	2404.3	27.3
20°-30°	2884.7	32.8
30°-40°	1938.6	22.1
40°-50°	580.3	6.6
50°-60°	102.4	1.2
60°-70°	29.1	0.3
70°-80°	14.3	0.2
80°-90°	4.5	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	6122.4	69.6
0°-40°	8061.0	91.7
0°-60°	8743.7	99.5
0°-90°	8791.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	8791.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	8656	
5°	8630	833
15°	8677	2404
25°	6386	2885
35°	3122	1939
45°	646	580
55°	106	102
65°	25	29
75°	12	14
85°	4	5
90°	0	



TEST NUMBER: P774006
CATALOG NUMBER: LD6D90BD010-EU6DR6570959050-6LBDP1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	8656.0
2.5°	8692.9
5°	8630.1
7.5°	8760.5
10°	8831.9
12.5°	8814.7
15°	8676.9
17.5°	8339.8
20°	7771.6
22.5°	7102.4
25°	6386.5
27.5°	5578.3
30°	4671.8
32.5°	3850.1
35°	3121.9
37.5°	2402.3
40°	1723.3
42.5°	1125.5
45°	645.8
47.5°	342.0
50°	212.8
52.5°	147.6
55°	105.8
57.5°	76.3
60°	52.9
62.5°	34.4
65°	24.6
67.5°	22.1
70°	20.9
72.5°	16.0
75°	12.3
77.5°	11.1
80°	8.6
82.5°	6.2
85°	3.7
87.5°	2.5
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)