

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P760497

Luminaire Tested: LD6D10D010-EU6DR500210IC9027-6LBSQW1B

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P760497  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-44)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D10D010-EU6DR500210IC9027-6LBSQW1B  
Description: 6 INCH SQAURE DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 50° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 911.0 lumens  
Efficiency: N/A  
Efficacy: 77.9 lumens/watt  
Spacing Criteria (0/90/45): 0.8 / 0.8 / 0.73  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 11.7  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P760497  
CATALOG NUMBER: LD6D10D010-EU6DR500210IC9027-6LBSQW1B

### Luminous Intensity Polar Plot

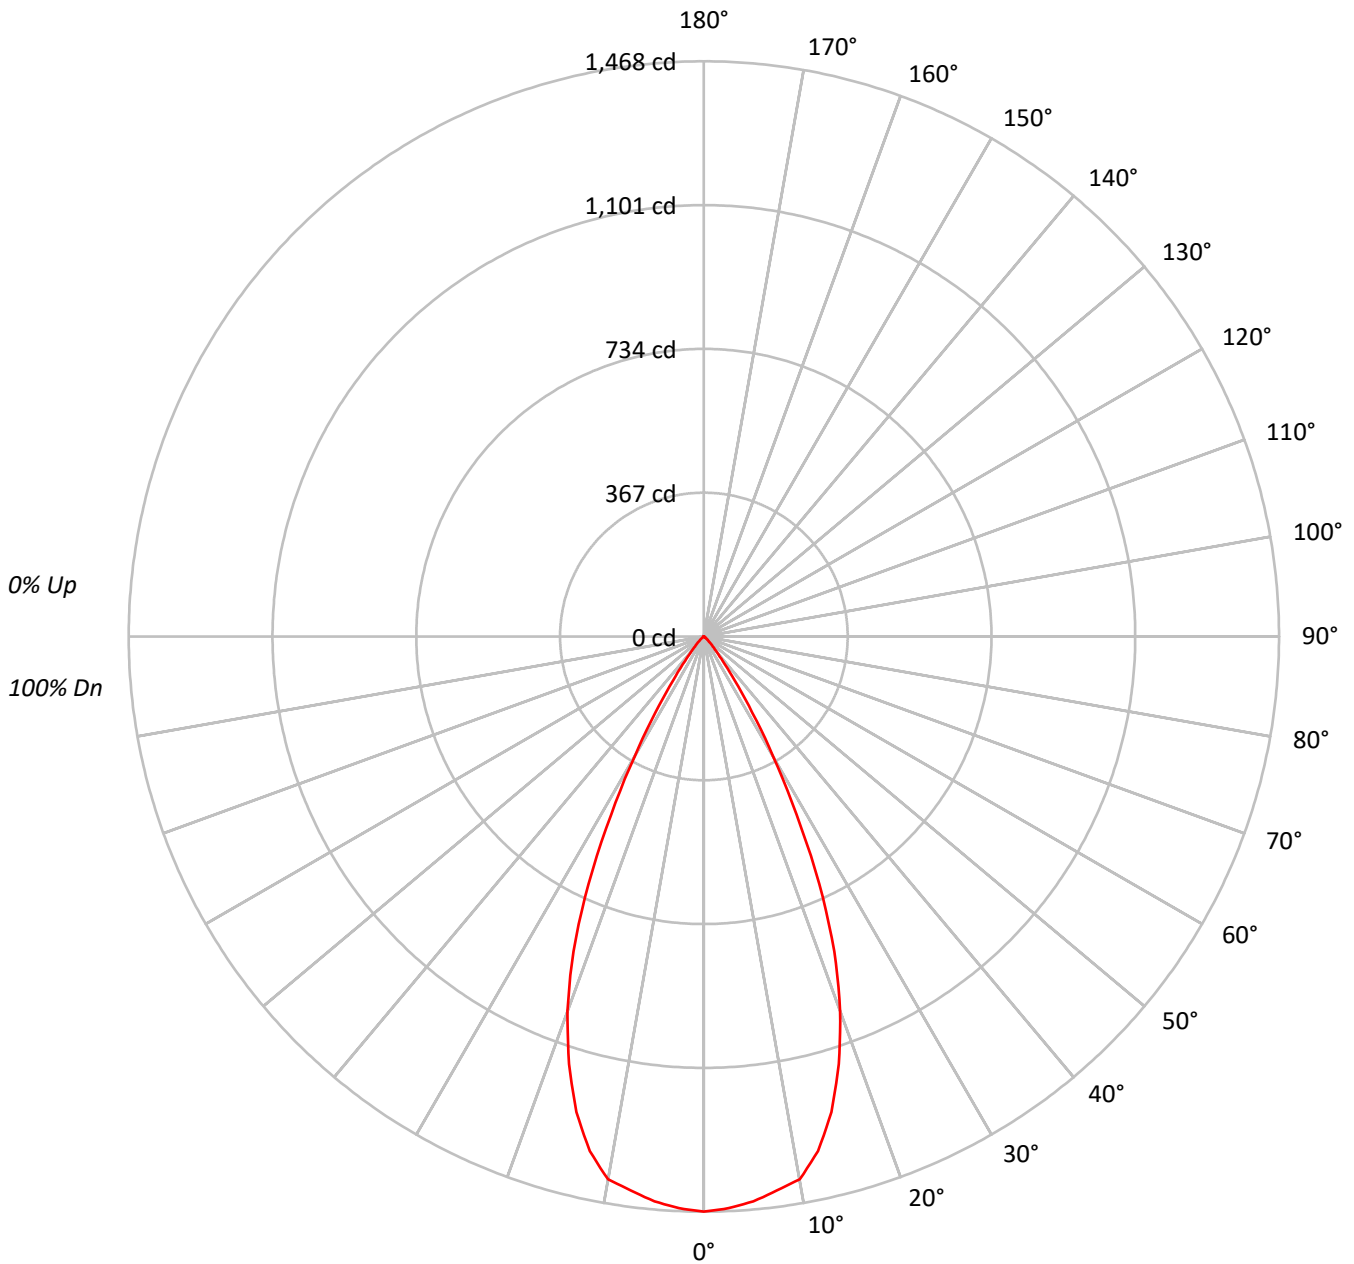



TEST NUMBER: P760497

CATALOG NUMBER: LD6D10D010-EU6DR500210IC9027-6LBSQW1B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						100													
1	114	112	109	107	112	110	108	106	106	104	102	102	101	99	98	97	97	95						95													
2	109	105	101	98	107	103	100	97	100	98	95	97	95	93	95	93	91	90						90													
3	105	99	95	91	103	98	94	90	95	92	89	93	90	88	91	88	86	85						85													
4	100	94	89	85	99	93	88	85	90	87	84	89	85	83	87	84	82	80						80													
5	96	89	84	80	95	88	83	79	86	82	79	85	81	78	83	80	77	76						76													
6	92	84	79	75	91	83	79	75	82	78	74	81	77	74	79	76	74	72						72													
7	88	80	75	71	87	79	74	71	78	74	71	77	73	70	76	73	70	69						69													
8	85	76	71	67	84	76	71	67	75	70	67	74	70	67	73	69	66	65						65													
9	81	73	68	64	80	72	67	64	71	67	64	71	67	64	70	66	63	62						62													
10	78	70	64	61	77	69	64	61	68	64	61	68	64	61	67	63	60	59						59													

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	160384
5°	158704
10°	156090
15°	142129
20°	118273
25°	83955
30°	44435
35°	18113
40°	6732
45°	3075
50°	1258
55°	648
60°	328
65°	78
70°	0
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 3075 cd/sqm



TEST NUMBER: P760497

CATALOG NUMBER: LD6D10D010-EU6DR500210IC9027-6LBSQW1B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	136.8	15.0
10°-20°	345.6	37.9
20°-30°	310.5	34.1
30°-40°	97.2	10.7
40°-50°	17.0	1.9
50°-60°	3.4	0.4
60°-70°	0.5	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	792.9	87.0
0°-40°	890.1	97.7
0°-60°	910.5	99.9
0°-90°	911.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	911.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1468	
5°	1447	137
15°	1256	346
25°	696	310
35°	136	97
45°	20	17
55°	3	3
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P760497

CATALOG NUMBER: LD6D10D010-EU6DR500210IC9027-6LBSQW1B

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	1467.9
2.5°	1460.6
5°	1447.0
7.5°	1426.2
10°	1406.9
12.5°	1345.0
15°	1256.5
17.5°	1144.1
20°	1017.2
22.5°	870.3
25°	696.4
27.5°	512.0
30°	352.2
32.5°	229.4
35°	135.8
37.5°	78.0
40°	47.2
42.5°	30.7
45°	19.9
47.5°	12.1
50°	7.4
52.5°	5.1
55°	3.4
57.5°	2.3
60°	1.5
62.5°	0.9
65°	0.3
67.5°	0.1
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)