

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P760056

Luminaire Tested: LD6D10D010-EU6DR200210IC9035-6LBSQW1MW

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P760056
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-36)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D10D010-EU6DR200210IC9035-6LBSQW1MW
Description: 6 INCH SQAURE DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 20° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1004.8 lumens
Efficiency: N/A
Efficacy: 85.9 lumens/watt
Spacing Criteria (0/90/45): 0.34 / 0.34 / 0.36
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 11.7
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P760056

CATALOG NUMBER: LD6D10D010-EU6DR200210IC9035-6LBSQW1MW

Luminous Intensity Polar Plot

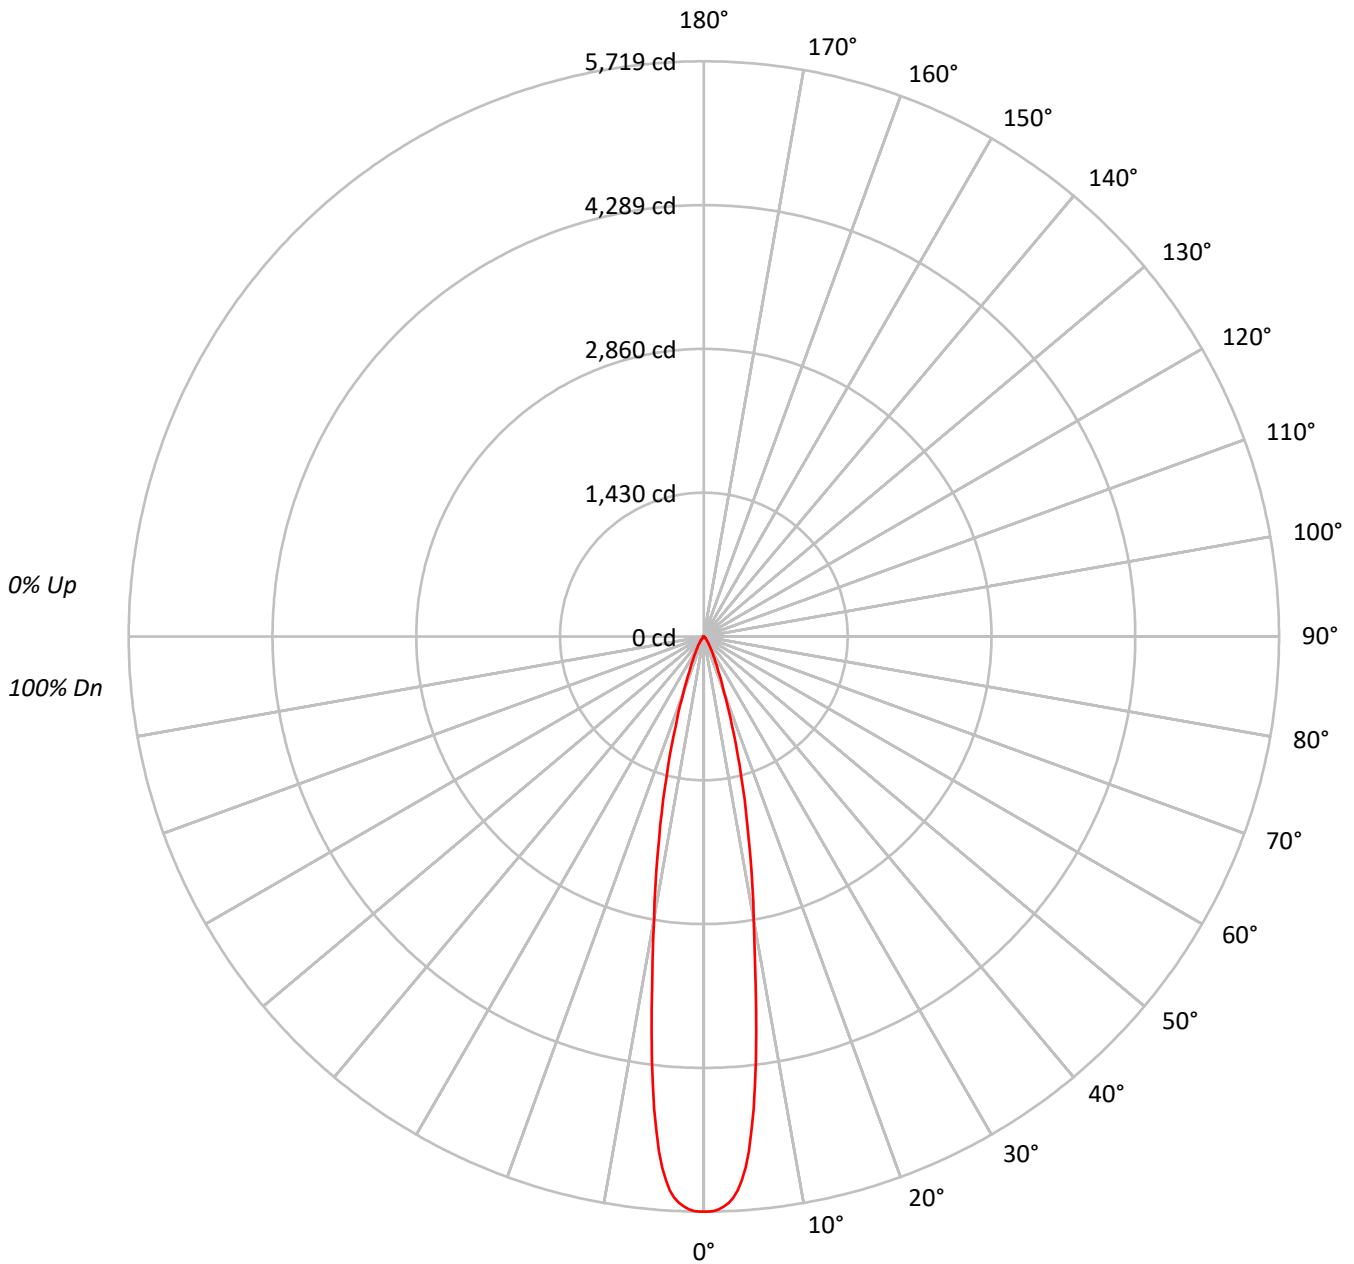



TEST NUMBER: P760056

CATALOG NUMBER: LD6D10D010-EU6DR200210IC9035-6LBSQW1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100															
1	115	113	111	109	113	111	109	108	107	106	104	103	102	101	100	99	98	97	97	98	98	97															
2	111	108	105	102	109	106	104	101	103	101	99	100	99	97	98	96	95	94	98	96	95	94															
3	108	103	100	97	106	102	99	96	100	97	95	97	95	93	95	93	92	91	95	93	92	91															
4	105	99	96	93	103	98	95	92	96	93	91	95	92	90	93	91	89	88	93	91	89	88															
5	102	96	92	89	100	95	91	89	94	90	88	92	89	87	91	88	86	85	91	88	86	85															
6	99	93	89	86	98	92	88	86	91	87	85	90	87	84	88	86	84	83	88	86	84	83															
7	96	90	86	83	95	89	86	83	88	85	82	87	84	82	86	84	82	81	86	84	82	81															
8	94	87	83	81	93	87	83	80	86	83	80	85	82	80	84	82	80	79	84	82	80	79															
9	91	85	81	78	91	85	81	78	84	80	78	83	80	78	82	80	78	77	82	80	78	77															
10	89	83	79	76	88	82	79	76	82	78	76	81	78	76	81	78	76	75	81	78	76	75															

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	624862
5°	563745
10°	316408
15°	160838
20°	68101
25°	31429
30°	16641
35°	8963
40°	4792
45°	2828
50°	1649
55°	876
60°	546
65°	388
70°	160
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 2828 cd/sqm



TEST NUMBER: P760056

CATALOG NUMBER: LD6D10D010-EU6DR200210IC9035-6LBSQW1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	407.2	40.5
10°-20°	401.0	39.9
20°-30°	131.0	13.0
30°-40°	44.6	4.4
40°-50°	15.0	1.5
50°-60°	4.5	0.4
60°-70°	1.5	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	939.1	93.5
0°-40°	983.7	97.9
0°-60°	1003.2	99.8
0°-90°	1004.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1004.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5719	
5°	5140	407
15°	1422	401
25°	261	131
35°	67	45
45°	18	15
55°	5	5
65°	2	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P760056
CATALOG NUMBER: LD6D10D010-EU6DR200210IC9035-6LBSQW1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	5719.0
0.5°	5719.0
1°	5711.9
1.5°	5697.6
2°	5671.7
2.5°	5637.0
3°	5588.1
3.5°	5519.9
4°	5418.6
4.5°	5295.3
5°	5140.0
5.5°	4935.8
6°	4726.5
6.5°	4486.6
7°	4251.8
7.5°	3976.8
8°	3731.4
8.5°	3484.4
9°	3256.2
9.5°	3046.9
10°	2851.9
12.5°	2047.7
15°	1421.9
17.5°	928.9
20°	585.7
22.5°	379.4
25°	260.7
27.5°	183.3
30°	131.9
32.5°	94.7
35°	67.2
37.5°	46.9
40°	33.6
42.5°	24.4
45°	18.3
47.5°	14.3
50°	9.7
52.5°	6.1
55°	4.6
57.5°	3.6
60°	2.5
62.5°	2.0
65°	1.5



TEST NUMBER: P760056
CATALOG NUMBER: LD6D10D010-EU6DR200210IC9035-6LBSQW1MW

CANDELA DISTRIBUTION (continued):

	0°
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



67.5°		1.0
70°		0.5

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)