

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P760693

Luminaire Tested: LD6D10D010-EU6DR600210IC9040-6LBSQW1MW

Issue Date: 2/5/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P760693  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-57)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/5/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D10D010-EU6DR600210IC9040-6LBSQW1MW  
Description: 6 INCH SQAURE DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 60° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1016.4 lumens  
Efficiency: N/A  
Efficacy: 86.9 lumens/watt  
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.83  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 11.7  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P760693  
CATALOG NUMBER: LD6D10D010-EU6DR600210IC9040-6LBSQW1MW

### Luminous Intensity Polar Plot

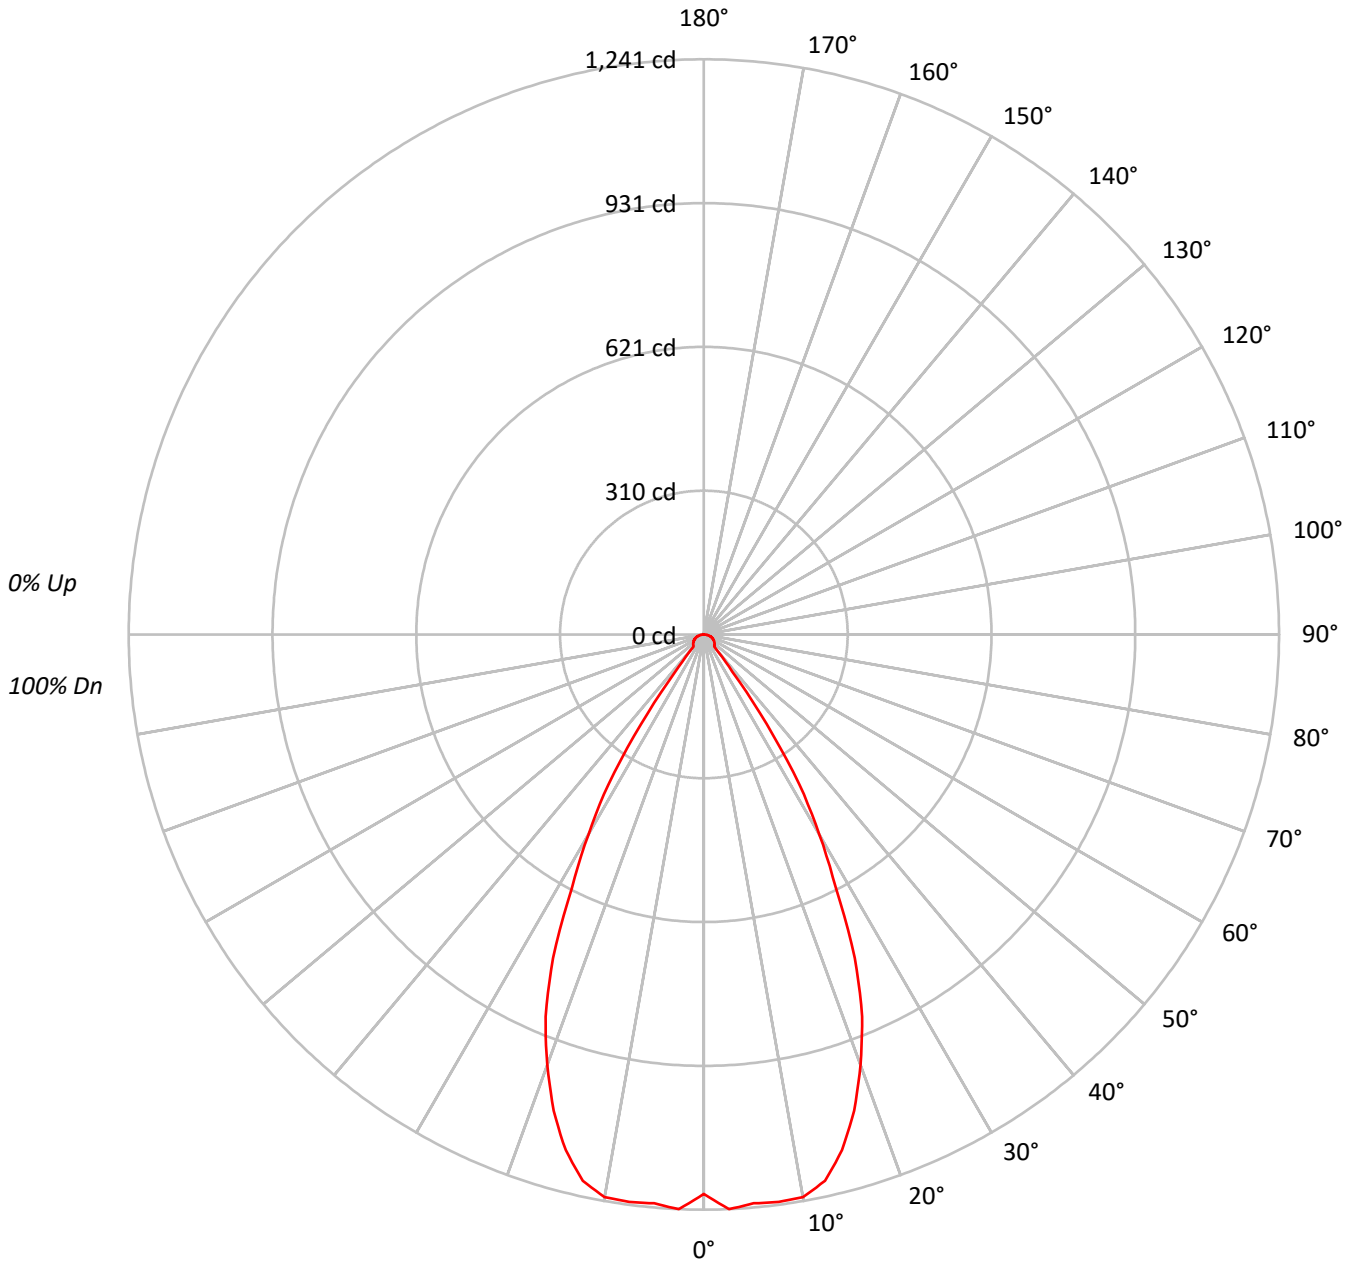



TEST NUMBER: P760693

CATALOG NUMBER: LD6D10D010-EU6DR600210IC9040-6LBSQW1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93																			
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86																			
3	102	96	90	86	100	94	89	86	91	88	84	89	86	83	87	84	82	80																			
4	97	89	84	80	95	88	83	79	86	82	78	84	80	77	82	79	76	75																			
5	92	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70																			
6	88	79	73	69	87	78	73	69	77	72	68	75	71	68	74	70	67	66																			
7	84	75	69	65	83	74	68	64	73	68	64	72	67	64	71	67	63	62																			
8	80	71	65	61	79	70	65	61	69	64	60	68	64	60	67	63	60	59																			
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55																			
10	73	64	58	54	72	63	58	54	62	58	54	62	57	54	61	57	54	53																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	131889
5°	135134
10°	136763
15°	130286
20°	114866
25°	92912
30°	62842
35°	31492
40°	5106
45°	5006
50°	5099
55°	5181
60°	5332
65°	5429
70°	5559
75°	5615
80°	5474
85°	4513

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 75°  
 Luminance: 5615 cd/sqm



TEST NUMBER: P760693

CATALOG NUMBER: LD6D10D010-EU6DR600210IC9040-6LBSQW1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	117.8	11.6
10°-20°	318.6	31.3
20°-30°	342.8	33.7
30°-40°	149.0	14.7
40°-50°	25.0	2.5
50°-60°	24.4	2.4
60°-70°	20.8	2.0
70°-80°	13.9	1.4
80°-90°	4.2	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	779.1	76.7
0°-40°	928.1	91.3
0°-60°	977.5	96.2
0°-90°	1016.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1016.4	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1207	
5°	1232	118
15°	1152	319
25°	771	343
35°	236	149
45°	32	25
55°	27	24
65°	21	21
75°	13	14
85°	4	4
90°	0	



TEST NUMBER: P760693

CATALOG NUMBER: LD6D10D010-EU6DR600210IC9040-6LBSQW1MW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1207.1
2.5°	1241.1
5°	1232.1
7.5°	1234.9
10°	1232.7
12.5°	1207.3
15°	1151.8
17.5°	1077.4
20°	987.9
22.5°	892.3
25°	770.7
27.5°	616.4
30°	498.1
32.5°	383.9
35°	236.1
37.5°	101.0
40°	35.8
42.5°	33.0
45°	32.4
47.5°	31.3
50°	30.0
52.5°	28.6
55°	27.2
57.5°	25.8
60°	24.4
62.5°	22.8
65°	21.0
67.5°	19.3
70°	17.4
72.5°	15.4
75°	13.3
77.5°	11.0
80°	8.7
82.5°	6.1
85°	3.6
87.5°	1.3
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)