

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P760315

Luminaire Tested: LD6D10D010-EU6DR350210IC9050-6LBSQW1B

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P760315  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-20)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D10D010-EU6DR350210IC9050-6LBSQW1B  
Description: 6 INCH SQAURE DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 35° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 912.0 lumens  
Efficiency: N/A  
Efficacy: 77.9 lumens/watt  
Spacing Criteria (0/90/45): 0.6 / 0.6 / 0.54  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 11.7  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P760315  
CATALOG NUMBER: LD6D10D010-EU6DR350210IC9050-6LBSQW1B

### Luminous Intensity Polar Plot

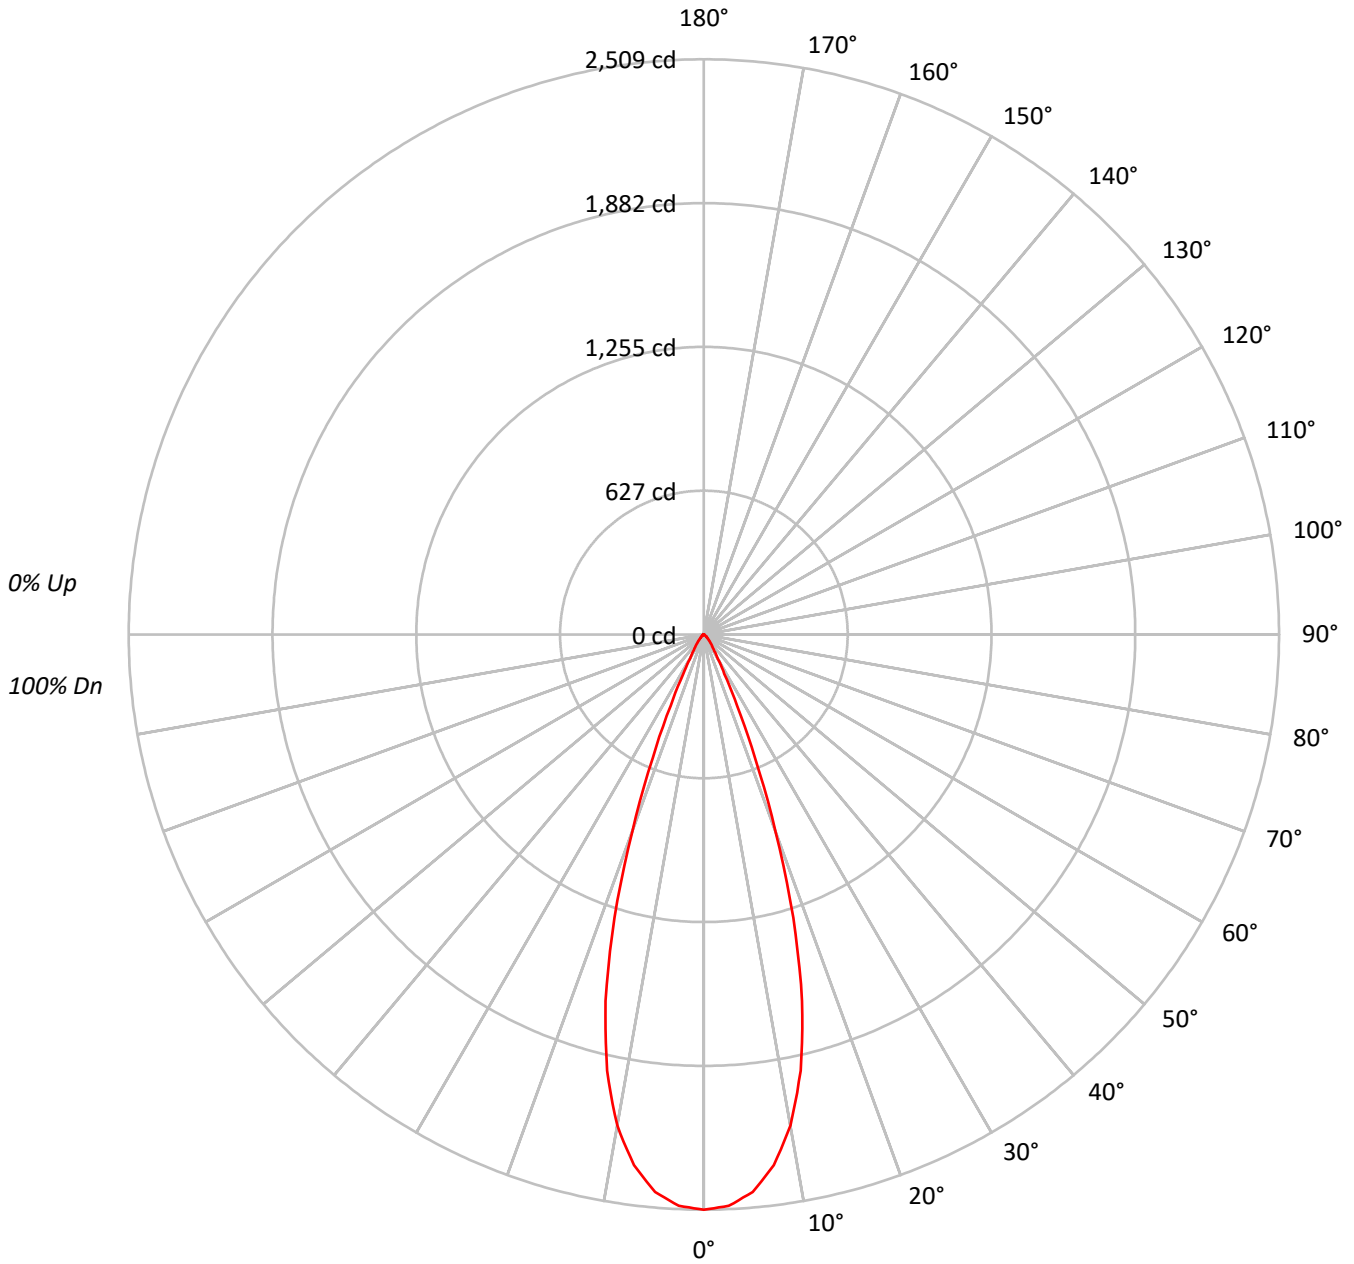



TEST NUMBER: P760315

CATALOG NUMBER: LD6D10D010-EU6DR350210IC9050-6LBSQW1B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	115	112	110	108	112	110	108	107	106	105	103	103	101	100	99	98	98	96	96	96	96
2	110	106	103	101	108	105	102	99	102	99	97	99	97	95	96	95	93	92	92	92	92
3	106	101	97	94	105	100	96	94	97	95	92	95	93	91	93	91	89	88	88	88	88
4	103	97	92	89	101	96	92	89	94	90	88	92	89	87	90	88	86	84	84	84	84
5	99	93	88	85	98	92	87	84	90	86	84	89	85	83	87	84	82	81	81	81	81
6	96	89	84	81	94	88	84	81	87	83	80	85	82	80	84	81	79	78	78	78	78
7	93	85	81	78	91	85	80	77	84	80	77	83	79	77	82	79	76	75	75	75	75
8	90	82	78	74	88	82	77	74	81	77	74	80	76	74	79	76	73	72	72	72	72
9	87	79	75	72	86	79	75	72	78	74	71	77	74	71	77	73	71	70	70	70	70
10	84	77	72	69	83	76	72	69	76	72	69	75	71	69	74	71	69	68	68	68	68

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	274179
5°	267735
10°	241297
15°	187285
20°	106227
25°	41327
30°	15417
35°	8456
40°	5520
45°	3368
50°	2142
55°	1524
60°	1093
65°	595
70°	32
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 3368 cd/sqm



TEST NUMBER: P760315

CATALOG NUMBER: LD6D10D010-EU6DR350210IC9050-6LBSQW1B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	224.5	24.6
10°-20°	438.3	48.1
20°-30°	178.8	19.6
30°-40°	42.8	4.7
40°-50°	17.9	2.0
50°-60°	7.4	0.8
60°-70°	2.3	0.3
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	841.6	92.3
0°-40°	884.4	97.0
0°-60°	909.6	99.7
0°-90°	912.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	912.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2509	
5°	2441	225
15°	1656	438
25°	343	179
35°	63	43
45°	22	18
55°	8	7
65°	2	2
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P760315

CATALOG NUMBER: LD6D10D010-EU6DR350210IC9050-6LBSQW1B

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	2509.4
2.5°	2494.3
5°	2441.1
7.5°	2334.8
10°	2174.9
12.5°	1949.6
15°	1655.7
17.5°	1296.2
20°	913.6
22.5°	582.6
25°	342.8
27.5°	193.8
30°	122.2
32.5°	85.8
35°	63.4
37.5°	49.0
40°	38.7
42.5°	29.9
45°	21.8
47.5°	16.3
50°	12.6
52.5°	10.0
55°	8.0
57.5°	6.4
60°	5.0
62.5°	3.7
65°	2.3
67.5°	0.8
70°	0.1
72.5°	0.1
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.1
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)