

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P760773

Luminaire Tested: LD6D10D010-EU6DR650210IC9050-6LBCSSQMMS

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P760773  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D10D010-EU6DR650210IC9050-6LBCSSQMMS  
Description: 6 INCH SQAURE SHALLOW CAST MATTE METALLIC SILVER TRIM, WITH 65° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 980.5 lumens  
Efficiency: N/A  
Efficacy: 83.8 lumens/watt  
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96  
Luminous Opening: Circular (Dia: 0.48' x H: 0')  
CIE Type: Direct

Input Watts (W): 11.7  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P760773

CATALOG NUMBER: LD6D10D010-EU6DR650210IC9050-6LBCSSQMMS

### Luminous Intensity Polar Plot

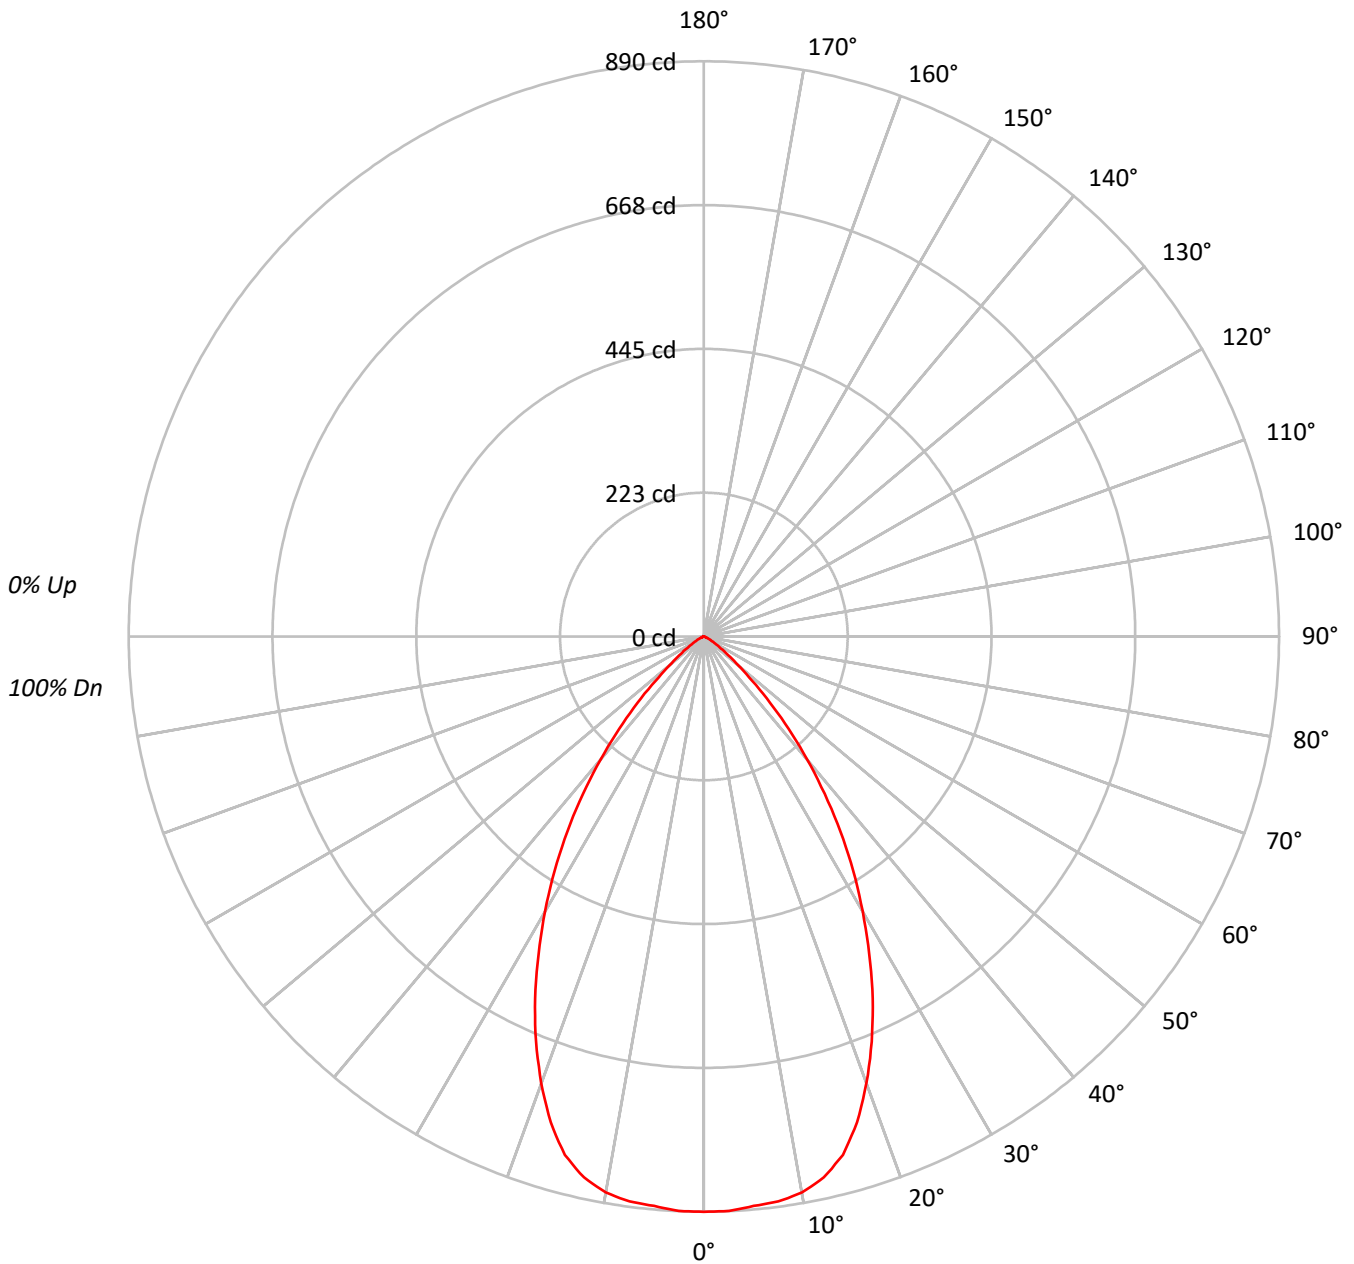



TEST NUMBER: P760773

CATALOG NUMBER: LD6D10D010-EU6DR650210IC9050-6LBCSSQMMS

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |   |     |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|---|-----|--|--|--|--|--|----|--|--|--|--|--|--|--|--|---|
| RF  | 20  |     |     |     |     |     |     |     |     | 20  |     |     |     |     |     |     |     |     | 20 |    |   |     |  |  |  |  |  | 20 |  |  |  |  |  |  |  |  |   |
| RC  | 80  |     |     |     |     |     |     |     |     | 50  |     |     |     |     |     |     |     |     | 30 |    |   |     |  |  |  |  |  | 10 |  |  |  |  |  |  |  |  | 0 |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30 | 10 | 0 |     |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |   |     |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |    |    |   | 100 |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 1   | 113 | 110 | 107 | 105 | 111 | 108 | 105 | 103 | 104 | 102 | 100 | 100 | 99  | 97  | 97  | 95  | 94  | 93  |    |    |   | 93  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 2   | 107 | 102 | 97  | 94  | 105 | 100 | 96  | 92  | 97  | 93  | 90  | 94  | 91  | 88  | 91  | 89  | 87  | 85  |    |    |   | 85  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 3   | 101 | 94  | 88  | 84  | 99  | 92  | 87  | 83  | 90  | 86  | 82  | 87  | 84  | 81  | 85  | 82  | 80  | 78  |    |    |   | 78  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 4   | 95  | 87  | 81  | 76  | 93  | 86  | 80  | 76  | 84  | 79  | 75  | 82  | 77  | 74  | 80  | 76  | 73  | 72  |    |    |   | 72  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 5   | 90  | 81  | 74  | 70  | 88  | 80  | 74  | 69  | 78  | 73  | 69  | 76  | 72  | 68  | 75  | 71  | 68  | 66  |    |    |   | 66  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 6   | 85  | 75  | 69  | 64  | 83  | 74  | 68  | 64  | 73  | 67  | 63  | 71  | 67  | 63  | 70  | 66  | 62  | 61  |    |    |   | 61  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 7   | 80  | 70  | 64  | 59  | 79  | 69  | 63  | 59  | 68  | 63  | 59  | 67  | 62  | 58  | 66  | 61  | 58  | 56  |    |    |   | 56  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 8   | 76  | 66  | 59  | 55  | 75  | 65  | 59  | 55  | 64  | 58  | 54  | 63  | 58  | 54  | 62  | 57  | 54  | 52  |    |    |   | 52  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 9   | 72  | 61  | 55  | 51  | 71  | 61  | 55  | 51  | 60  | 54  | 51  | 59  | 54  | 50  | 58  | 54  | 50  | 49  |    |    |   | 49  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 10  | 68  | 58  | 52  | 47  | 67  | 57  | 51  | 47  | 57  | 51  | 47  | 56  | 51  | 47  | 55  | 50  | 47  | 46  |    |    |   | 46  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |

**AVERAGE LUMINANCE (cd/sqm):**

|     |       |
|-----|-------|
|     | 0°    |
| 0°  | 51997 |
| 5°  | 51861 |
| 10° | 51815 |
| 15° | 50222 |
| 20° | 45719 |
| 25° | 39844 |
| 30° | 33140 |
| 35° | 26259 |
| 40° | 18946 |
| 45° | 11976 |
| 50° | 6242  |
| 55° | 3319  |
| 60° | 1740  |
| 65° | 954   |
| 70° | 393   |
| 75° | 429   |
| 80° | 303   |
| 85° | 268   |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 11976 cd/sqm



TEST NUMBER: P760773

CATALOG NUMBER: LD6D10D010-EU6DR650210IC9050-6LBCSSQMMS

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 84.2   | 8.6       |
| 10°-20°   | 230.5  | 23.5      |
| 20°-30°   | 281.8  | 28.7      |
| 30°-40°   | 228.7  | 23.3      |
| 40°-50°   | 113.9  | 11.6      |
| 50°-60°   | 31.8   | 3.2       |
| 60°-70°   | 7.2    | 0.7       |
| 70°-80°   | 1.8    | 0.2       |
| 80°-90°   | 0.5    | 0.0       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 596.5  | 60.8      |
| 0°-40°    | 825.2  | 84.2      |
| 0°-60°    | 970.9  | 99.0      |
| 0°-90°    | 980.5  | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 980.5  | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°  | Flux |
|-----|-----|------|
| 0°  | 890 |      |
| 5°  | 885 | 84   |
| 15° | 831 | 231  |
| 25° | 618 | 282  |
| 35° | 368 | 229  |
| 45° | 145 | 114  |
| 55° | 33  | 32   |
| 65° | 7   | 7    |
| 75° | 2   | 2    |
| 85° | 0   | 0    |
| 90° | 0   |      |



TEST NUMBER: P760773

CATALOG NUMBER: LD6D10D010-EU6DR650210IC9050-6LBCSSQMMS

**CANDELA DISTRIBUTION (FULL):**

|       | 0°    |
|-------|-------|
| 0°    | 890.3 |
| 2.5°  | 889.6 |
| 5°    | 884.6 |
| 7.5°  | 881.8 |
| 10°   | 873.7 |
| 12.5° | 857.5 |
| 15°   | 830.6 |
| 17.5° | 788.5 |
| 20°   | 735.6 |
| 22.5° | 678.6 |
| 25°   | 618.3 |
| 27.5° | 553.8 |
| 30°   | 491.4 |
| 32.5° | 429.8 |
| 35°   | 368.3 |
| 37.5° | 306.9 |
| 40°   | 248.5 |
| 42.5° | 193.9 |
| 45°   | 145.0 |
| 47.5° | 101.0 |
| 50°   | 68.7  |
| 52.5° | 47.4  |
| 55°   | 32.6  |
| 57.5° | 22.0  |
| 60°   | 14.9  |
| 62.5° | 10.3  |
| 65°   | 6.9   |
| 67.5° | 3.6   |
| 70°   | 2.3   |
| 72.5° | 2.2   |
| 75°   | 1.9   |
| 77.5° | 1.3   |
| 80°   | 0.9   |
| 82.5° | 0.6   |
| 85°   | 0.4   |
| 87.5° | 0.3   |
| 90°   | 0.0   |

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)