

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P761040

Luminaire Tested: LD6D15D010-EU6DR2015309027-6LBSQW1MW

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P761040
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-36)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D15D010-EU6DR2015309027-6LBSQW1MW
Description: 6 INCH SQAURE DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 20° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1238.6 lumens
Efficiency: N/A
Efficacy: 78.4 lumens/watt
Spacing Criteria (0/90/45): 0.34 / 0.34 / 0.36
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 15.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P761040

CATALOG NUMBER: LD6D15D010-EU6DR2015309027-6LBSQW1MW

Luminous Intensity Polar Plot

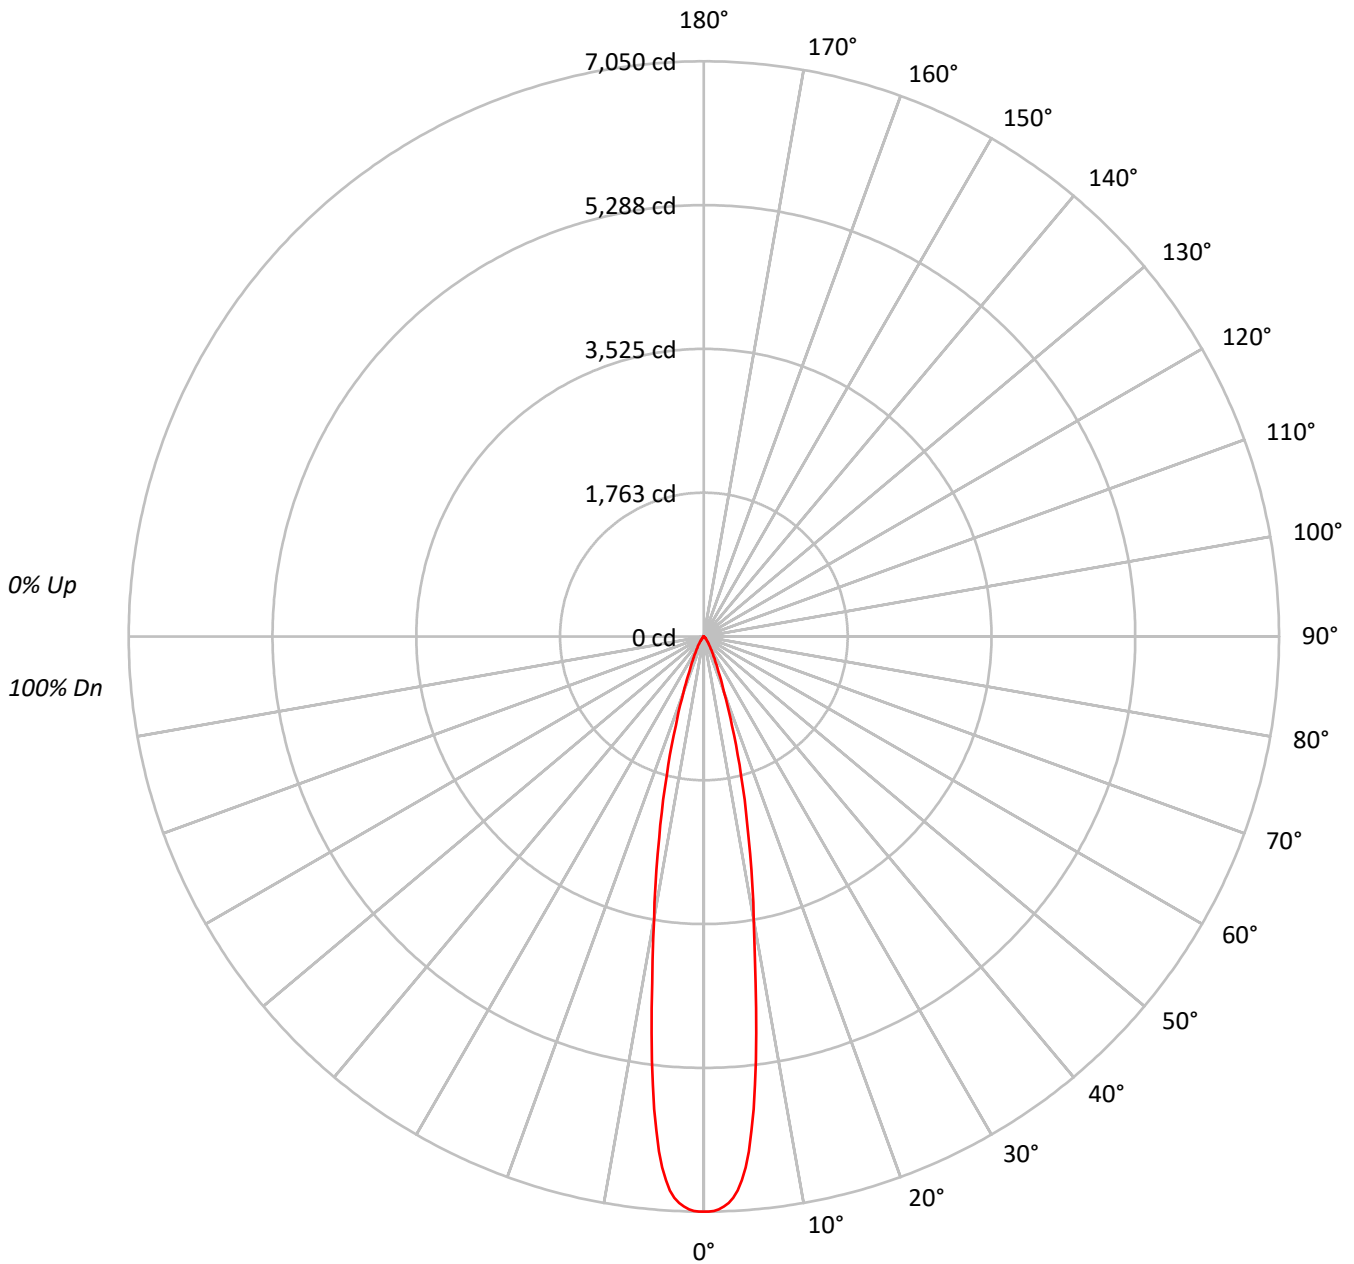



TEST NUMBER: P761040

CATALOG NUMBER: LD6D15D010-EU6DR2015309027-6LBSQW1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100															
1	115	113	111	109	113	111	109	108	107	106	104	103	102	101	100	99	98	97	97	98	98	97															
2	111	108	105	102	109	106	104	101	103	101	99	100	99	97	98	96	95	94	94	98	96	95															
3	108	103	100	97	106	102	99	96	100	97	95	97	95	93	95	93	92	91	91	98	96	95															
4	105	99	96	93	103	98	95	92	96	93	91	95	92	90	93	91	89	88	88	96	94	93															
5	102	96	92	89	100	95	91	89	94	90	88	92	89	87	91	88	86	85	85	94	92	91															
6	99	93	89	86	98	92	88	86	91	87	85	90	87	84	88	86	84	83	83	92	90	89															
7	96	90	86	83	95	89	86	83	88	85	82	87	84	82	86	84	82	81	81	90	88	87															
8	94	87	83	81	93	87	83	80	86	83	80	85	82	80	84	82	80	79	79	88	86	85															
9	91	85	81	78	91	85	81	78	84	80	78	83	80	78	82	80	78	77	77	86	84	83															
10	89	83	79	76	88	82	79	76	82	78	76	81	78	76	81	78	76	75	75	84	82	81															

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	770277
5°	694942
10°	390043
15°	198268
20°	83937
25°	38747
30°	20514
35°	11057
40°	5905
45°	3492
50°	2023
55°	1086
60°	677
65°	491
70°	192
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 3492 cd/sqm



TEST NUMBER: P761040

CATALOG NUMBER: LD6D15D010-EU6DR2015309027-6LBSQW1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	501.9	40.5
10°-20°	494.3	39.9
20°-30°	161.5	13.0
30°-40°	55.0	4.4
40°-50°	18.5	1.5
50°-60°	5.6	0.4
60°-70°	1.9	0.2
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1157.7	93.5
0°-40°	1212.7	97.9
0°-60°	1236.7	99.8
0°-90°	1238.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1238.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	7050	
5°	6336	502
15°	1753	494
25°	321	161
35°	83	55
45°	23	18
55°	6	6
65°	2	2
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P761040

CATALOG NUMBER: LD6D15D010-EU6DR2015309027-6LBSQW1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	7049.9
0.5°	7049.9
1°	7041.2
1.5°	7023.6
2°	6991.6
2.5°	6948.9
3°	6888.6
3.5°	6804.5
4°	6679.6
4.5°	6527.6
5°	6336.2
5.5°	6084.4
6°	5826.4
6.5°	5530.7
7°	5241.3
7.5°	4902.3
8°	4599.7
8.5°	4295.3
9°	4014.0
9.5°	3756.0
10°	3515.6
12.5°	2524.3
15°	1752.8
17.5°	1145.1
20°	721.9
22.5°	467.7
25°	321.4
27.5°	226.0
30°	162.6
32.5°	116.8
35°	82.9
37.5°	57.8
40°	41.4
42.5°	30.1
45°	22.6
47.5°	17.6
50°	11.9
52.5°	7.5
55°	5.7
57.5°	4.4
60°	3.1
62.5°	2.5
65°	1.9



TEST NUMBER: P761040
CATALOG NUMBER: LD6D15D010-EU6DR2015309027-6LBSQW1MW

CANDELA DISTRIBUTION (continued):

	0°
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





67.5°		1.3
70°		0.6

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)