

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P761495

Luminaire Tested: LD6D15D010-EU6DR500215IC9027-6LBSQW1B

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P761495  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-44)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D15D010-EU6DR500215IC9027-6LBSQW1B  
Description: 6 INCH SQAURE DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 50° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1224.2 lumens  
Efficiency: N/A  
Efficacy: 77.5 lumens/watt  
Spacing Criteria (0/90/45): 0.8 / 0.8 / 0.73  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 15.8  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P761495  
CATALOG NUMBER: LD6D15D010-EU6DR500215IC9027-6LBSQW1B

### Luminous Intensity Polar Plot

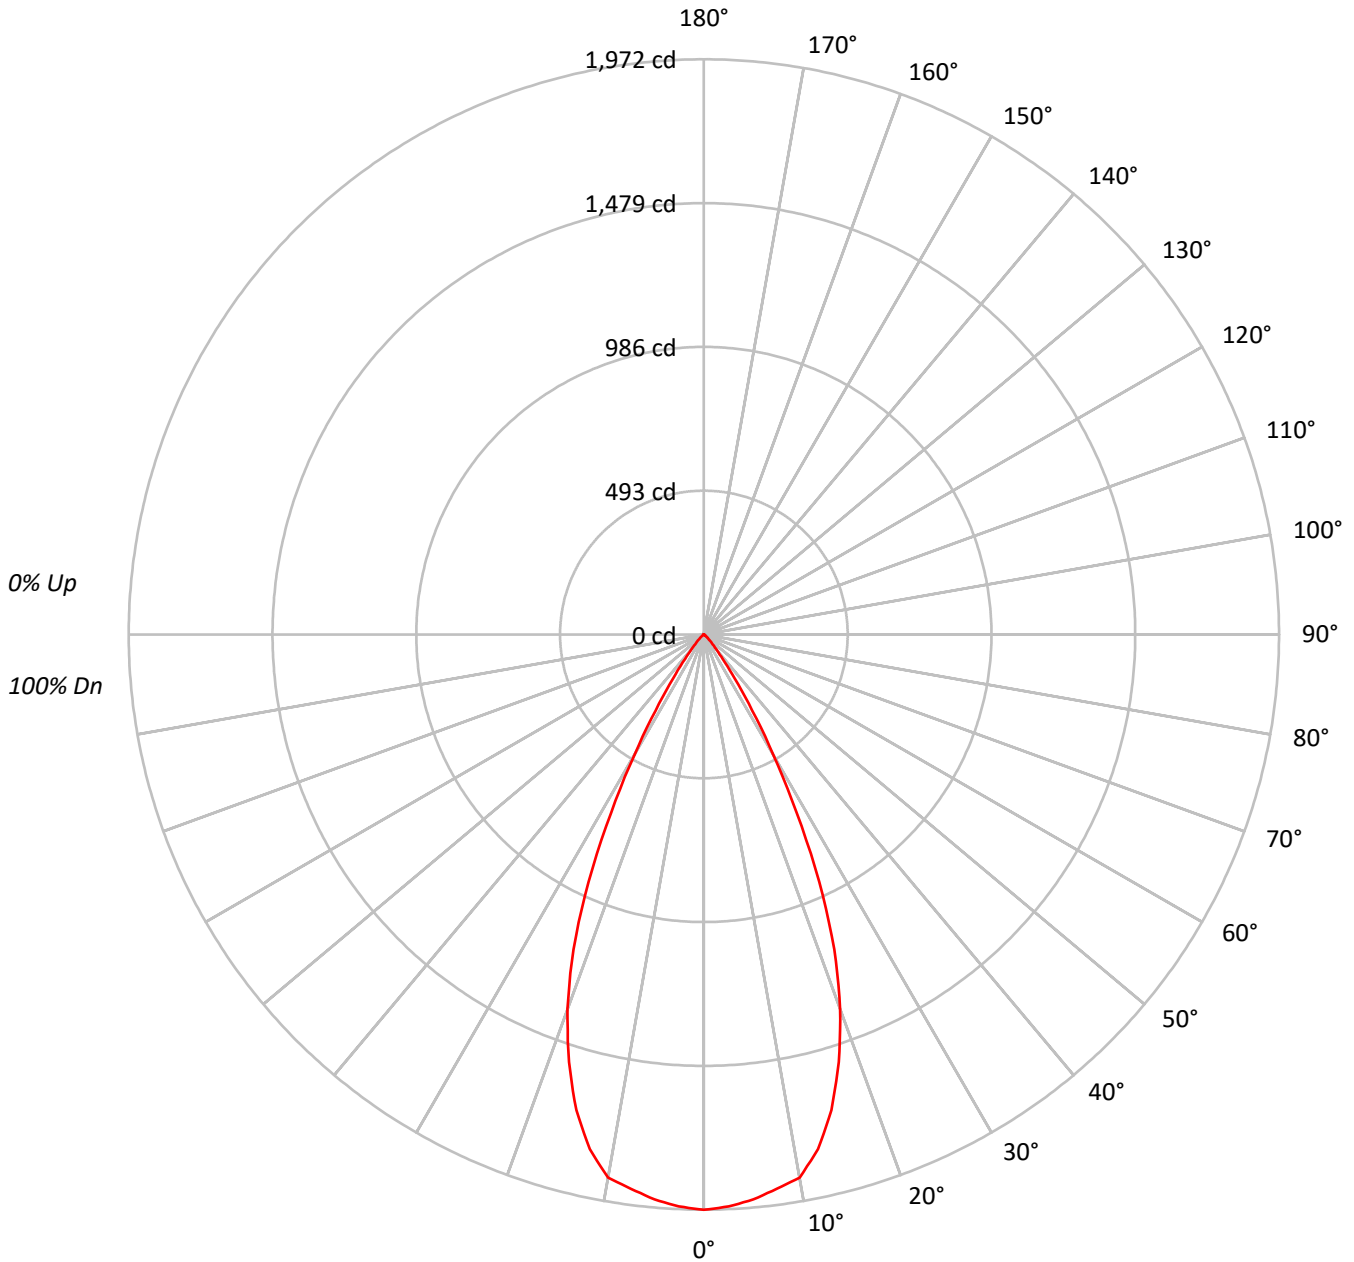



TEST NUMBER: P761495

CATALOG NUMBER: LD6D15D010-EU6DR500215IC9027-6LBSQW1B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	112	109	107	112	110	108	106	106	104	102		102	101	99		98	97	97	95
2	109	105	101	98	107	103	100	97	100	98	95		97	95	93		95	93	91	90
3	105	99	95	91	103	98	94	90	95	92	89		93	90	88		91	88	86	85
4	100	94	89	85	99	93	88	85	90	87	84		89	85	83		87	84	82	80
5	96	89	84	80	95	88	83	79	86	82	79		85	81	78		83	80	77	76
6	92	84	79	75	91	83	79	75	82	78	74		81	77	74		79	76	74	72
7	88	80	75	71	87	79	74	71	78	74	71		77	73	70		76	73	70	69
8	85	76	71	67	84	76	71	67	75	70	67		74	70	67		73	69	66	65
9	81	73	68	64	80	72	67	64	71	67	64		71	67	64		70	66	63	62
10	78	70	64	61	77	69	64	61	68	64	61		68	64	61		67	63	60	59

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	215506
5°	213258
10°	209744
15°	190983
20°	158922
25°	112804
30°	59713
35°	24329
40°	9043
45°	4141
50°	1700
55°	876
60°	437
65°	129
70°	0
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 4141 cd/sqm



TEST NUMBER: P761495

CATALOG NUMBER: LD6D15D010-EU6DR500215IC9027-6LBSQW1B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	183.8	15.0
10°-20°	464.4	37.9
20°-30°	417.2	34.1
30°-40°	130.6	10.7
40°-50°	22.9	1.9
50°-60°	4.6	0.4
60°-70°	0.7	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1065.4	87.0
0°-40°	1196.0	97.7
0°-60°	1223.5	99.9
0°-90°	1224.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1224.2	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1972	
5°	1944	184
15°	1688	464
25°	936	417
35°	182	131
45°	27	23
55°	5	5
65°	0	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P761495  
CATALOG NUMBER: LD6D15D010-EU6DR500215IC9027-6LBSQW1B

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	1972.4
2.5°	1962.6
5°	1944.4
7.5°	1916.4
10°	1890.5
12.5°	1807.3
15°	1688.4
17.5°	1537.4
20°	1366.8
22.5°	1169.4
25°	935.7
27.5°	687.9
30°	473.3
32.5°	308.1
35°	182.4
37.5°	104.8
40°	63.4
42.5°	41.3
45°	26.8
47.5°	16.3
50°	10.0
52.5°	6.8
55°	4.6
57.5°	3.2
60°	2.0
62.5°	1.1
65°	0.5
67.5°	0.2
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)