

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P761712

Luminaire Tested: LD6D15D010-EU6DR650215IC9027-6LBCSSQMW

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P761712
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D15D010-EU6DR650215IC9027-6LBCSSQMW
Description: 6 INCH SQAURE SHALLOW CAST MATTE WHITE TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1212.4 lumens
Efficiency: N/A
Efficacy: 76.7 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96
Luminous Opening: Circular (Dia: 0.48' x H: 0')
CIE Type: Direct

Input Watts (W): 15.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P761712

CATALOG NUMBER: LD6D15D010-EU6DR650215IC9027-6LBCSSQMW

Luminous Intensity Polar Plot

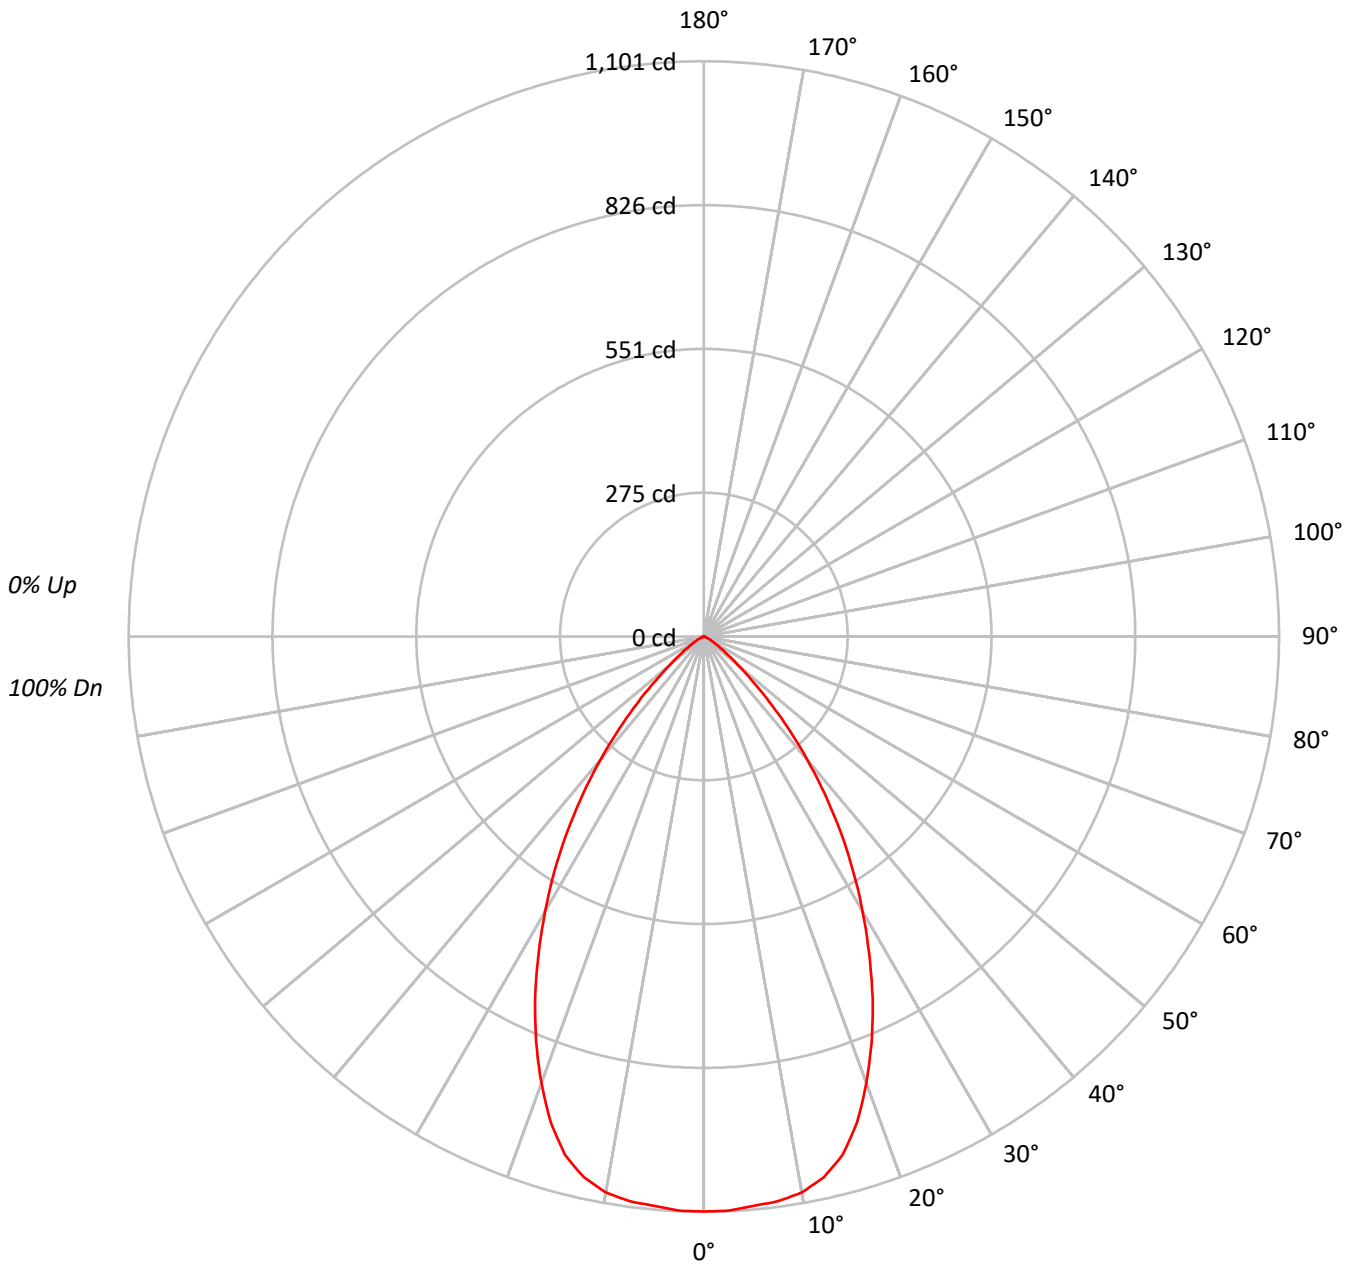



TEST NUMBER: P761712

CATALOG NUMBER: LD6D15D010-EU6DR650215IC9027-6LBCSSQMW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93			93																
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85			85																
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78			78																
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72			72																
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66			66																
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61			61																
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56			56																
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52			52																
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49			49																
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46			46																

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	64291
5°	64132
10°	64079
15°	62103
20°	56534
25°	49266
30°	40976
35°	32469
40°	23429
45°	14801
50°	7714
55°	4104
60°	2149
65°	1188
70°	495
75°	542
80°	370
85°	335

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 14801 cd/sqm



TEST NUMBER: P761712

CATALOG NUMBER: LD6D15D010-EU6DR650215IC9027-6LBCSSQMW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	104.1	8.6
10°-20°	285.1	23.5
20°-30°	348.4	28.7
30°-40°	282.7	23.3
40°-50°	140.9	11.6
50°-60°	39.3	3.2
60°-70°	8.9	0.7
70°-80°	2.3	0.2
80°-90°	0.6	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	737.6	60.8
0°-40°	1020.4	84.2
0°-60°	1200.5	99.0
0°-90°	1212.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1212.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1101	
5°	1094	104
15°	1027	285
25°	764	348
35°	455	283
45°	179	141
55°	40	39
65°	9	9
75°	2	2
85°	0	1
90°	0	



TEST NUMBER: P761712

CATALOG NUMBER: LD6D15D010-EU6DR650215IC9027-6LBCSSQMW

CANDELA DISTRIBUTION (FULL):

	0°
0°	1100.8
2.5°	1100.0
5°	1093.9
7.5°	1090.3
10°	1080.5
12.5°	1060.4
15°	1027.1
17.5°	975.0
20°	909.6
22.5°	839.1
25°	764.5
27.5°	684.7
30°	607.6
32.5°	531.4
35°	455.4
37.5°	379.5
40°	307.3
42.5°	239.7
45°	179.2
47.5°	124.9
50°	84.9
52.5°	58.6
55°	40.3
57.5°	27.2
60°	18.4
62.5°	12.8
65°	8.6
67.5°	4.4
70°	2.9
72.5°	2.8
75°	2.4
77.5°	1.6
80°	1.1
82.5°	0.8
85°	0.5
87.5°	0.3
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)