

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P761358

Luminaire Tested: LD6D15D010-EU6DR400215IC9035-6LBCSSQMB

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P761358  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-28)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D15D010-EU6DR400215IC9035-6LBCSSQMB  
Description: 6 INCH SQAURE SHALLOW CAST MATTE BLACK TRIM, WITH 40° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1451.1 lumens  
Efficiency: N/A  
Efficacy: 91.8 lumens/watt  
Spacing Criteria (0/90/45): 0.68 / 0.68 / 0.6  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 15.8  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P761358

CATALOG NUMBER: LD6D15D010-EU6DR400215IC9035-6LBCSSQMB

### Luminous Intensity Polar Plot

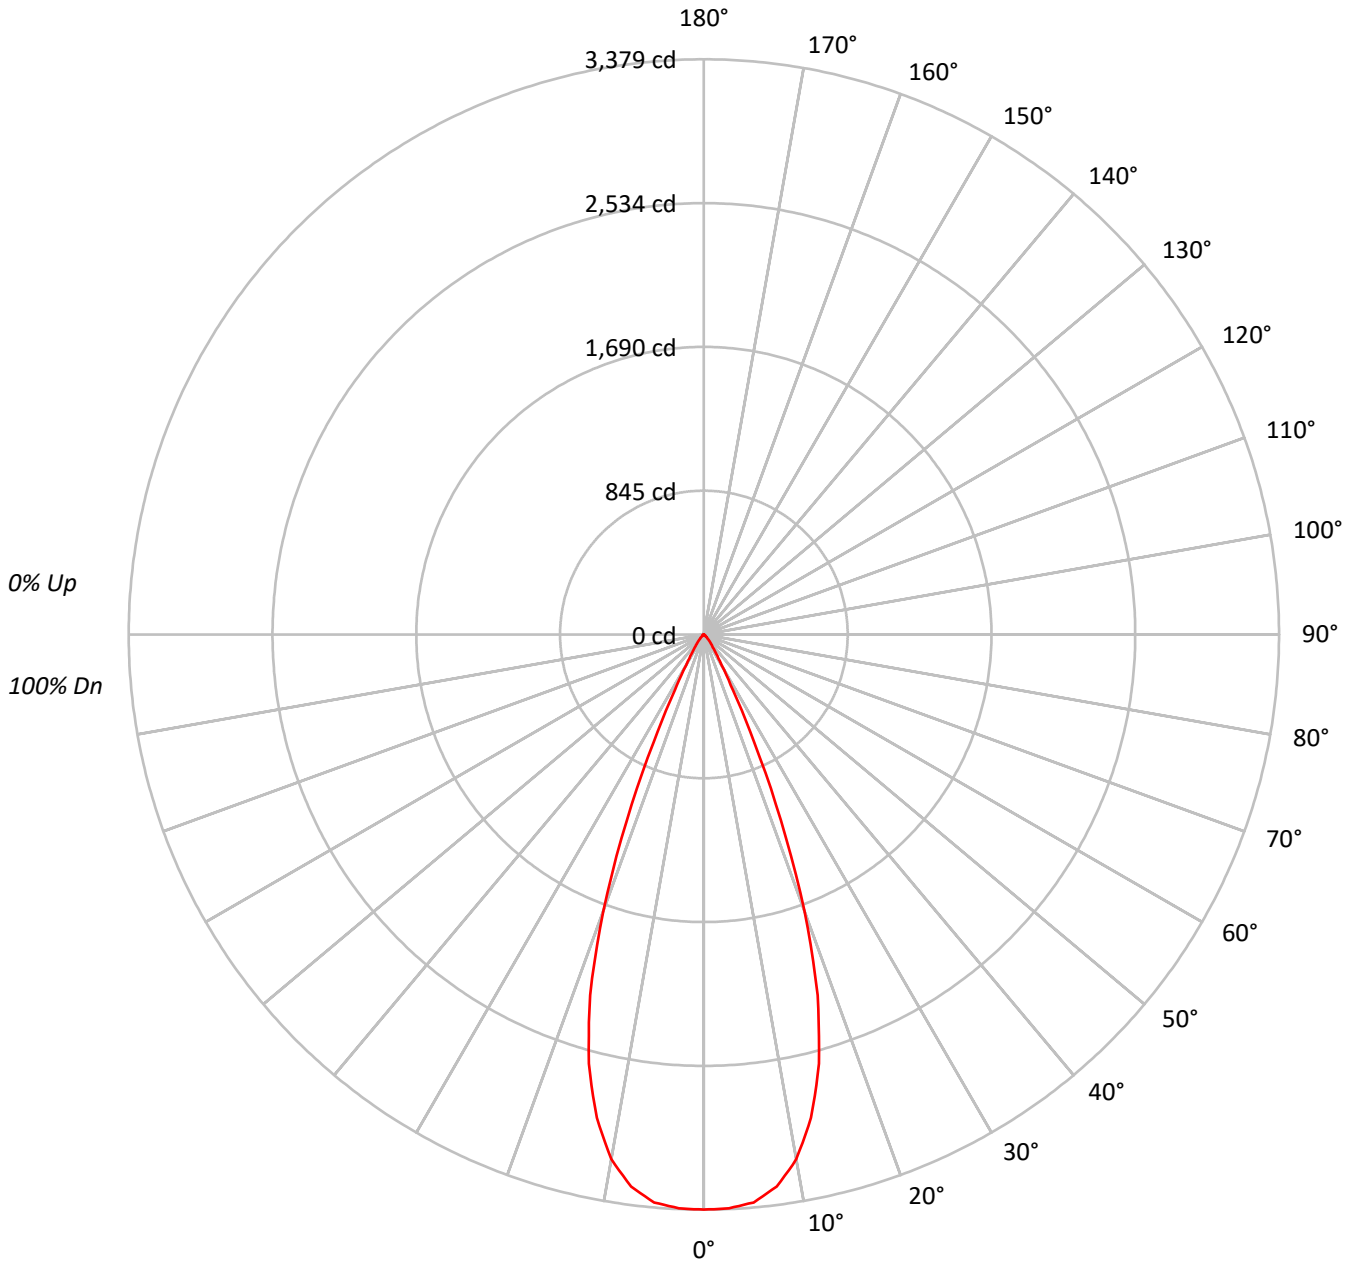



TEST NUMBER: P761358

CATALOG NUMBER: LD6D15D010-EU6DR400215IC9035-6LBCSSQMB

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	115	112	110	108	112	110	108	107	106	105	103	103	101	100	99	98	97	96			96																
2	110	106	103	100	108	105	102	99	102	99	97	99	97	95	96	95	93	92			92																
3	106	101	97	94	104	100	96	93	97	94	92	95	93	90	93	91	89	88			88																
4	102	97	92	89	101	95	91	88	93	90	87	92	89	86	90	87	85	84			84																
5	99	92	88	84	97	91	87	84	90	86	83	88	85	83	87	84	82	81			81																
6	95	88	84	80	94	88	83	80	86	82	80	85	82	79	84	81	79	77			77																
7	92	85	80	77	91	84	80	77	83	79	76	82	79	76	81	78	76	74			74																
8	89	82	77	74	88	81	77	74	80	76	73	79	76	73	78	75	73	72			72																
9	86	79	74	71	85	78	74	71	77	73	71	76	73	70	76	72	70	69			69																
10	83	76	71	68	82	75	71	68	75	71	68	74	70	68	73	70	68	67			67																

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	369148
5°	367356
10°	347229
15°	295185
20°	201199
25°	83943
30°	26393
35°	12271
40°	6789
45°	3106
50°	1513
55°	838
60°	415
65°	155
70°	64
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 3106 cd/sqm



TEST NUMBER: P761358

CATALOG NUMBER: LD6D15D010-EU6DR400215IC9035-6LBCSSQMB

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	312.7	21.6
10°-20°	700.6	48.3
20°-30°	350.7	24.2
30°-40°	64.3	4.4
40°-50°	17.7	1.2
50°-60°	4.2	0.3
60°-70°	0.8	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1364.1	94.0
0°-40°	1428.4	98.4
0°-60°	1450.3	99.9
0°-90°	1451.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1451.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3379	
5°	3349	313
15°	2610	701
25°	696	351
35°	92	64
45°	20	18
55°	4	4
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P761358

CATALOG NUMBER: LD6D15D010-EU6DR400215IC9035-6LBCSSQMB

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	3378.6
2.5°	3373.6
5°	3349.4
7.5°	3272.0
10°	3129.7
12.5°	2907.8
15°	2609.6
17.5°	2221.8
20°	1730.4
22.5°	1179.7
25°	696.3
27.5°	368.1
30°	209.2
32.5°	135.2
35°	92.0
37.5°	65.7
40°	47.6
42.5°	32.5
45°	20.1
47.5°	12.8
50°	8.9
52.5°	6.3
55°	4.4
57.5°	2.8
60°	1.9
62.5°	1.2
65°	0.6
67.5°	0.4
70°	0.2
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)