

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P761696

Luminaire Tested: LD6D15D010-EU6DR600215IC9050-6LBSQW1MW

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P761696
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-57)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D15D010-EU6DR600215IC9050-6LBSQW1MW
Description: 6 INCH SQAURE DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 60° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1349.7 lumens
Efficiency: N/A
Efficacy: 85.4 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.83
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 15.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P761696
CATALOG NUMBER: LD6D15D010-EU6DR600215IC9050-6LBSQW1MW

Luminous Intensity Polar Plot

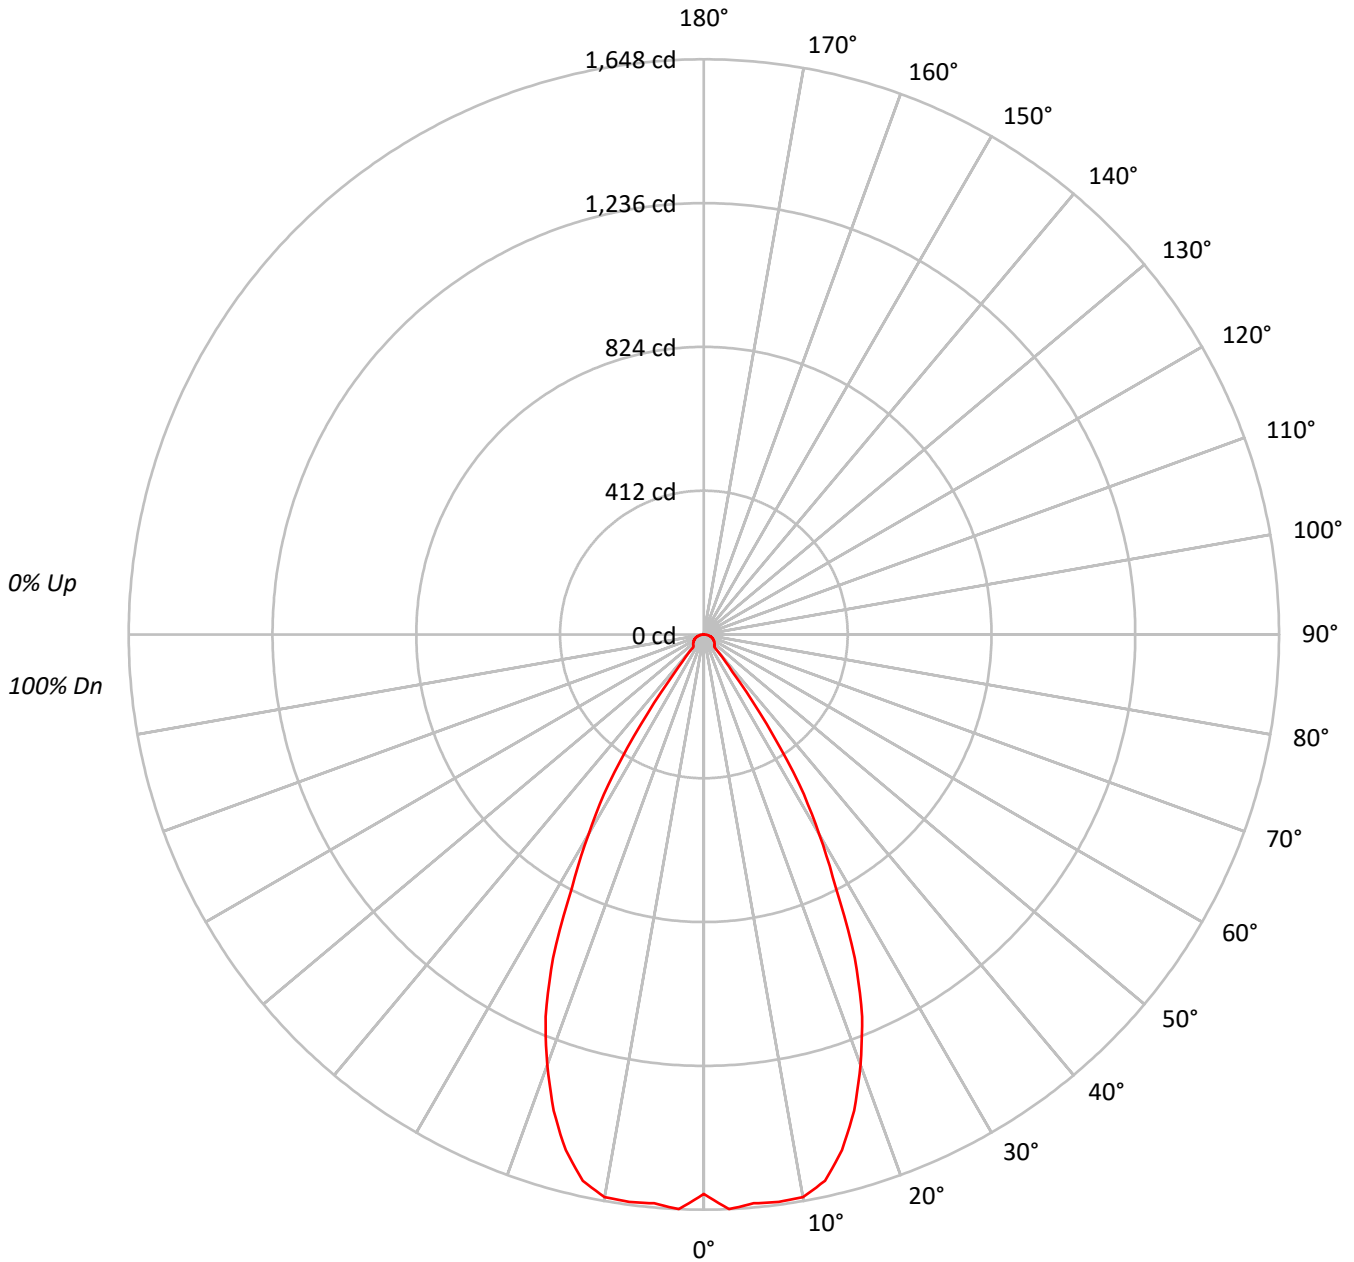



TEST NUMBER: P761696

CATALOG NUMBER: LD6D15D010-EU6DR600215IC9050-6LBSQW1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93			93																
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86			86																
3	102	96	90	86	100	94	89	86	91	88	84	89	86	83	87	84	82	80			80																
4	97	89	84	80	95	88	83	79	86	82	78	84	80	77	82	79	76	75			75																
5	92	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70			70																
6	88	79	73	69	87	78	73	69	77	72	68	75	71	68	74	70	67	66			66																
7	84	75	69	65	83	74	68	64	73	68	64	72	67	64	71	67	63	62			62																
8	80	71	65	61	79	70	65	61	69	64	60	68	64	60	67	63	60	59			59																
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55			55																
10	73	64	58	54	72	63	58	54	62	58	54	62	57	54	61	57	54	53			53																

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	175134
5°	179444
10°	181608
15°	173009
20°	152538
25°	123377
30°	83457
35°	41815
40°	6789
45°	6644
50°	6765
55°	6877
60°	7058
65°	7239
70°	7379
75°	7472
80°	7236
85°	6017

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 75°
 Luminance: 7472 cd/sqm



TEST NUMBER: P761696

CATALOG NUMBER: LD6D15D010-EU6DR600215IC9050-6LBSQW1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	156.4	11.6
10°-20°	423.1	31.3
20°-30°	455.2	33.7
30°-40°	197.8	14.7
40°-50°	33.2	2.5
50°-60°	32.3	2.4
60°-70°	27.7	2.0
70°-80°	18.5	1.4
80°-90°	5.5	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1034.6	76.7
0°-40°	1232.5	91.3
0°-60°	1298.0	96.2
0°-90°	1349.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1349.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1603	
5°	1636	156
15°	1530	423
25°	1023	455
35°	314	198
45°	43	33
55°	36	32
65°	28	28
75°	18	18
85°	5	6
90°	0	



TEST NUMBER: P761696

CATALOG NUMBER: LD6D15D010-EU6DR600215IC9050-6LBSQW1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	1602.9
2.5°	1648.0
5°	1636.1
7.5°	1639.8
10°	1636.9
12.5°	1603.1
15°	1529.5
17.5°	1430.6
20°	1311.9
22.5°	1184.9
25°	1023.4
27.5°	818.6
30°	661.5
32.5°	509.8
35°	313.5
37.5°	134.1
40°	47.6
42.5°	43.8
45°	43.0
47.5°	41.5
50°	39.8
52.5°	38.0
55°	36.1
57.5°	34.2
60°	32.3
62.5°	30.3
65°	28.0
67.5°	25.7
70°	23.1
72.5°	20.5
75°	17.7
77.5°	14.6
80°	11.5
82.5°	8.1
85°	4.8
87.5°	1.7
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)