

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P761759

Luminaire Tested: LD6D15D010-EU6DR650215IC9050-6LBCSSQMMS

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P761759  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D15D010-EU6DR650215IC9050-6LBCSSQMMS  
Description: 6 INCH SQAURE SHALLOW CAST MATTE METALLIC SILVER TRIM, WITH 65° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1317.6 lumens  
Efficiency: N/A  
Efficacy: 83.4 lumens/watt  
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96  
Luminous Opening: Circular (Dia: 0.48' x H: 0')  
CIE Type: Direct

Input Watts (W): 15.8  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P761759  
CATALOG NUMBER: LD6D15D010-EU6DR650215IC9050-6LBCSSQMMS

### Luminous Intensity Polar Plot

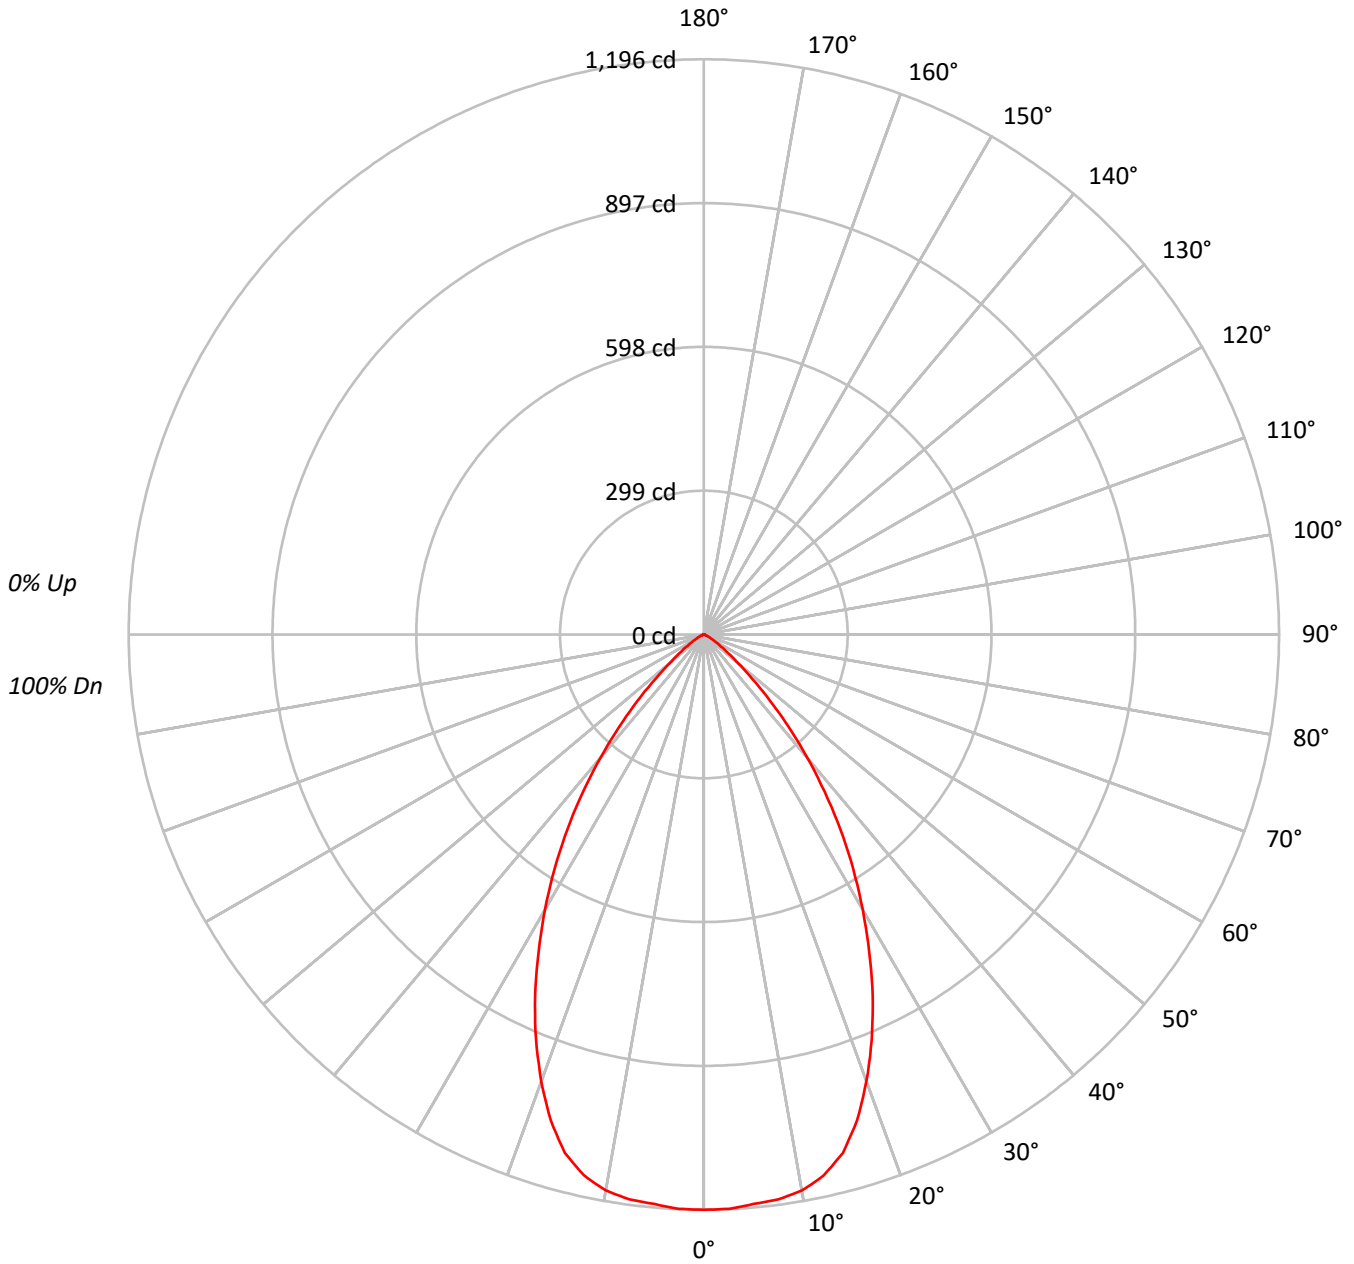



TEST NUMBER: P761759

CATALOG NUMBER: LD6D15D010-EU6DR650215IC9050-6LBCSSQMMS

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100															
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93				93															
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85				85															
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78				78															
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72				72															
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66				66															
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61				61															
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56				56															
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52				52															
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49				49															
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46				46															

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	69869
5°	69690
10°	69630
15°	67484
20°	61437
25°	53538
30°	44530
35°	35285
40°	25464
45°	16090
50°	8386
55°	4460
60°	2348
65°	1285
70°	546
75°	587
80°	404
85°	335

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 16090 cd/sqm



TEST NUMBER: P761759

CATALOG NUMBER: LD6D15D010-EU6DR650215IC9050-6LBCSSQMMS

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	113.1	8.6
10°-20°	309.8	23.5
20°-30°	378.7	28.7
30°-40°	307.3	23.3
40°-50°	153.1	11.6
50°-60°	42.7	3.2
60°-70°	9.7	0.7
70°-80°	2.5	0.2
80°-90°	0.6	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	801.6	60.8
0°-40°	1108.8	84.2
0°-60°	1304.7	99.0
0°-90°	1317.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1317.6	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1196	
5°	1189	113
15°	1116	310
25°	831	379
35°	495	307
45°	195	153
55°	44	43
65°	9	10
75°	3	3
85°	0	1
90°	0	



TEST NUMBER: P761759

CATALOG NUMBER: LD6D15D010-EU6DR650215IC9050-6LBCSSQMMS

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	1196.3
2.5°	1195.4
5°	1188.7
7.5°	1184.9
10°	1174.1
12.5°	1152.3
15°	1116.1
17.5°	1059.5
20°	988.5
22.5°	911.9
25°	830.8
27.5°	744.1
30°	660.3
32.5°	577.5
35°	494.9
37.5°	412.4
40°	334.0
42.5°	260.5
45°	194.8
47.5°	135.7
50°	92.3
52.5°	63.7
55°	43.8
57.5°	29.5
60°	20.1
62.5°	13.9
65°	9.3
67.5°	4.8
70°	3.2
72.5°	3.0
75°	2.6
77.5°	1.8
80°	1.2
82.5°	0.9
85°	0.5
87.5°	0.3
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)