

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P757676

Luminaire Tested: LD6D02D010-EU6DR650210IC9024-6LBSQW1B

Issue Date: 2/5/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P757676  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-59)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/5/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D02D010-EU6DR650210IC9024-6LBSQW1B  
Description: 6 INCH SQAURE DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 65° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 212.1 lumens  
Efficiency: N/A  
Efficacy: 41.6 lumens/watt  
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.92  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 5.1  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P757676

CATALOG NUMBER: LD6D02D010-EU6DR650210IC9024-6LBSQW1B

### Luminous Intensity Polar Plot

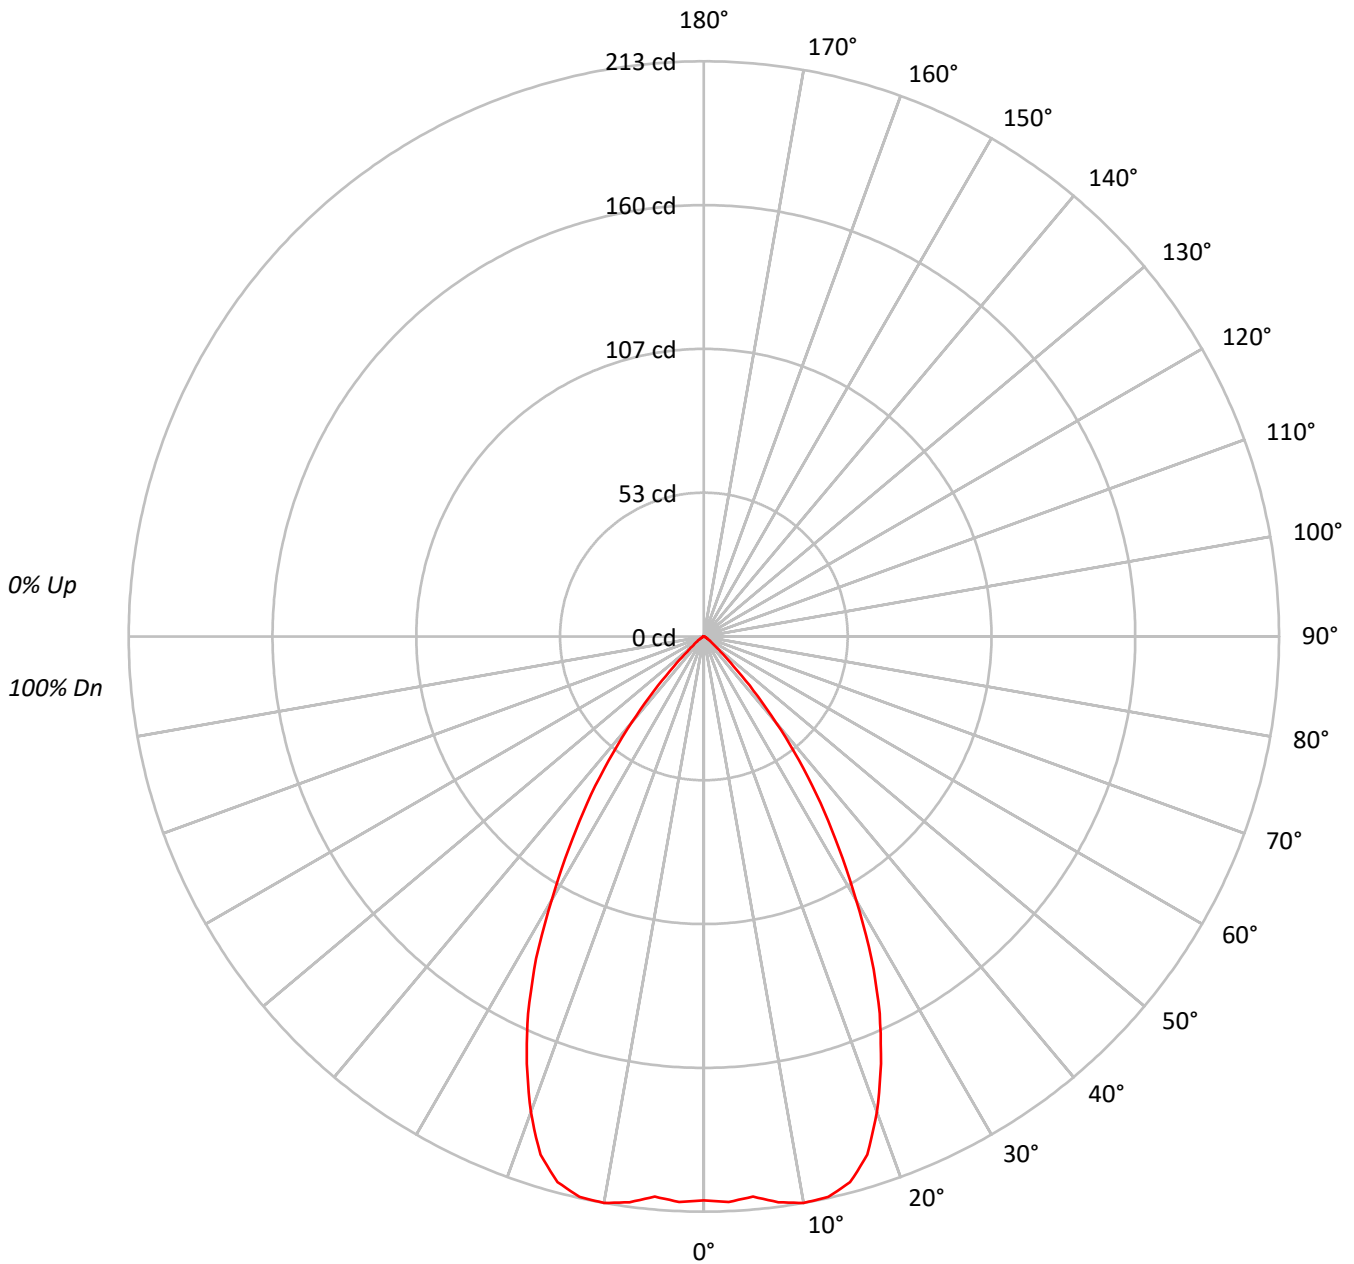



TEST NUMBER: P757676

CATALOG NUMBER: LD6D02D010-EU6DR650210IC9024-6LBSQW1B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93																			
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87																			
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80																			
4	97	89	84	79	95	88	83	79	86	81	78	84	80	77	82	79	76	75																			
5	92	83	78	73	90	82	77	73	81	76	72	79	75	72	77	74	71	69																			
6	87	78	72	68	86	77	72	68	76	71	67	74	70	67	73	69	66	65																			
7	83	73	67	63	81	73	67	63	71	66	62	70	66	62	69	65	62	60																			
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	56																			
9	75	65	59	55	74	65	59	55	64	58	55	63	58	55	62	58	54	53																			
10	71	61	56	52	70	61	55	52	60	55	51	59	55	51	59	54	51	50																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	22814
5°	22835
10°	23632
15°	23664
20°	21790
25°	18566
30°	14219
35°	10044
40°	5919
45°	2410
50°	884
55°	495
60°	284
65°	155
70°	160
75°	127
80°	126
85°	125

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 2410 cd/sqm



TEST NUMBER: P757676

CATALOG NUMBER: LD6D02D010-EU6DR650210IC9024-6LBSQW1B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	20.1	9.5
10°-20°	58.0	27.3
20°-30°	69.6	32.8
30°-40°	46.8	22.0
40°-50°	14.0	6.6
50°-60°	2.5	1.2
60°-70°	0.7	0.3
70°-80°	0.4	0.2
80°-90°	0.1	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	147.7	69.6
0°-40°	194.4	91.7
0°-60°	210.9	99.4
0°-90°	212.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	212.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	209	
5°	208	20
15°	209	58
25°	154	70
35°	75	47
45°	16	14
55°	3	2
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P757676

CATALOG NUMBER: LD6D02D010-EU6DR650210IC9024-6LBSQW1B

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	208.8
2.5°	209.6
5°	208.2
7.5°	211.3
10°	213.0
12.5°	212.6
15°	209.2
17.5°	201.2
20°	187.4
22.5°	171.3
25°	154.0
27.5°	134.5
30°	112.7
32.5°	92.9
35°	75.3
37.5°	57.9
40°	41.5
42.5°	27.2
45°	15.6
47.5°	8.3
50°	5.2
52.5°	3.6
55°	2.6
57.5°	1.8
60°	1.3
62.5°	0.8
65°	0.6
67.5°	0.5
70°	0.5
72.5°	0.4
75°	0.3
77.5°	0.3
80°	0.2
82.5°	0.2
85°	0.1
87.5°	0.1
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)