

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P756910

Luminaire Tested: LD6D02D010-EU6DR150210IC9027-6LBSQW1MW

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P756910
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-21)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D02D010-EU6DR150210IC9027-6LBSQW1MW
Description: 6 INCH SQAURE DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 15° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 322.0 lumens
Efficiency: N/A
Efficacy: 63.1 lumens/watt
Spacing Criteria (0/90/45): 0.22 / 0.22 / 0.23
Luminous Opening: Vertical Cylinder (Dia: 0.35' x H: 0.35')
CIE Type: Direct

Input Watts (W): 5.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P756910

CATALOG NUMBER: LD6D02D010-EU6DR150210IC9027-6LBSQW1MW

Luminous Intensity Polar Plot

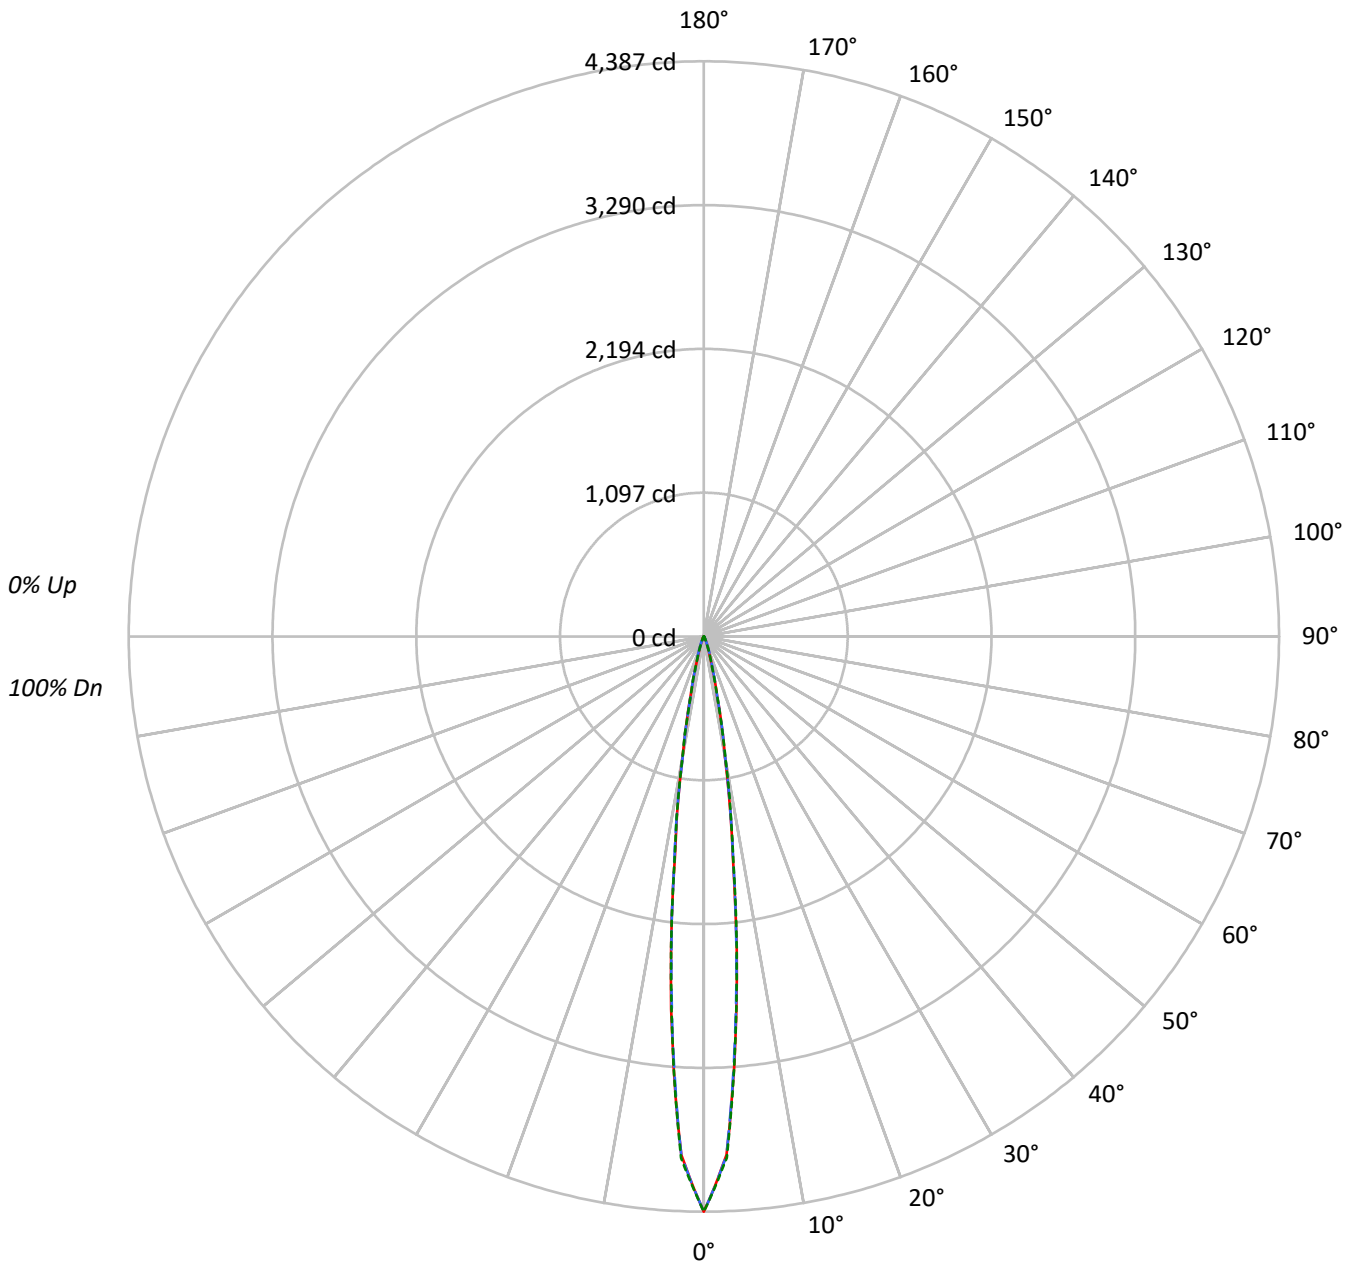



TEST NUMBER: P756910

CATALOG NUMBER: LD6D02D010-EU6DR150210IC9027-6LBSQW1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						100													
1	116	114	112	111	113	112	110	109	108	107	106	104	103	103	101	100	100	98						98													
2	113	110	107	105	111	108	106	104	105	103	102	102	101	100	100	98	98	96						96													
3	110	106	103	101	108	105	102	100	103	100	99	100	99	97	98	97	96	94						94													
4	108	103	100	98	106	102	99	97	100	98	96	99	97	95	97	95	94	93						93													
5	106	101	98	95	104	100	97	95	98	96	94	97	95	93	96	94	92	92						92													
6	104	99	95	93	102	98	95	93	97	94	92	96	93	92	95	93	91	90						90													
7	102	97	94	91	101	96	93	91	95	93	91	94	92	90	93	91	90	89						89													
8	100	95	92	90	99	95	92	90	94	91	89	93	91	89	92	90	89	88						88													
9	99	93	90	88	98	93	90	88	92	90	88	92	89	88	91	89	87	87						87													
10	97	92	89	87	96	92	89	87	91	89	87	91	88	87	90	88	86	86						86													

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	493670	493670	493670
5°	290100	286350	288616
10°	86580	87187	88521
15°	21540	21957	21280
20°	6448	7462	6579
25°	2275	2890	2298
30°	831	1101	846
35°	421	472	407
40°	263	291	263
45°	196	210	196
50°	153	153	153
55°	132	132	132
60°	105	105	105
65°	79	79	79
70°	66	66	66
75°	45	45	53
80°	32	32	32
85°	17	17	17

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 45°

Vertical Angle: 45°

Luminance: 210 cd/sqm



TEST NUMBER: P756910

CATALOG NUMBER: LD6D02D010-EU6DR150210IC9027-6LBSQW1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	208.8	64.9
10°-20°	85.9	26.7
20°-30°	17.1	5.3
30°-40°	4.3	1.3
40°-50°	2.2	0.7
50°-60°	1.7	0.5
60°-70°	1.2	0.4
70°-80°	0.7	0.2
80°-90°	0.2	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	311.8	96.8
0°-40°	316.1	98.2
0°-60°	320.0	99.4
0°-90°	322.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	322.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	4387	4387	4387	4387	4387	
5°	2854	2825	2818	2837	2840	208
15°	248	253	253	248	245	85
25°	29	33	37	33	30	15
35°	6	6	6	6	6	4
45°	3	3	3	3	3	2
55°	2	2	2	2	2	2
65°	1	1	1	1	1	1
75°	1	1	1	1	1	1
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P756910

CATALOG NUMBER: LD6D02D010-EU6DR150210IC9027-6LBSQW1MW

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	4387.4	4387.4	4387.4	4387.4	4387.4
2.5°	3957.6	3961.0	3962.3	3966.2	3980.6
5°	2854.5	2825.2	2817.6	2837.1	2839.9
7.5°	1690.9	1696.9	1718.6	1723.4	1706.0
10°	927.9	935.5	934.4	941.1	948.7
12.5°	474.5	468.6	466.7	474.4	463.8
15°	248.0	252.6	252.8	248.3	245.0
17.5°	133.4	138.7	147.7	140.4	129.3
20°	78.8	83.6	91.2	85.3	80.4
22.5°	48.7	52.6	57.9	53.3	49.4
25°	29.2	33.1	37.1	32.9	29.5
27.5°	17.3	20.6	23.2	20.4	17.1
30°	11.1	13.0	14.7	12.8	11.3
32.5°	7.8	8.5	9.3	8.5	7.8
35°	5.8	6.1	6.5	6.1	5.6
37.5°	4.5	4.8	5.0	4.6	4.3
40°	3.7	3.9	4.1	3.9	3.7
42.5°	3.2	3.3	3.3	3.3	3.2
45°	2.8	2.8	3.0	2.8	2.8
47.5°	2.4	2.4	2.6	2.4	2.4
50°	2.2	2.2	2.2	2.2	2.2
52.5°	2.0	2.0	2.0	2.0	2.0
55°	1.9	1.9	1.9	1.9	1.9
57.5°	1.7	1.7	1.7	1.7	1.7
60°	1.5	1.5	1.5	1.5	1.5
62.5°	1.3	1.3	1.3	1.3	1.3
65°	1.1	1.1	1.1	1.1	1.1
67.5°	1.1	1.1	1.1	1.1	1.1
70°	0.9	0.9	0.9	0.9	0.9
72.5°	0.7	0.7	0.7	0.7	0.7
75°	0.6	0.6	0.6	0.6	0.7
77.5°	0.6	0.6	0.6	0.6	0.6
80°	0.4	0.4	0.4	0.4	0.4
82.5°	0.4	0.4	0.4	0.4	0.4
85°	0.2	0.2	0.2	0.2	0.2
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180° - - 45°-225° - - - - 90°-270°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)