

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P756913

Luminaire Tested: LD6D02D010-EU6DR150210IC9030-6LBCSSQMW

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P756913
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-21)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D02D010-EU6DR150210IC9030-6LBCSSQMW
Description: 6 INCH SQAURE SHALLOW CAST MATTE WHITE TRIM, WITH 15° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 344.8 lumens
Efficiency: N/A
Efficacy: 67.6 lumens/watt
Spacing Criteria (0/90/45): 0.22 / 0.22 / 0.23
Luminous Opening: Vertical Cylinder (Dia: 0.35' x H: 0.35')
CIE Type: Direct

Input Watts (W): 5.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P756913

CATALOG NUMBER: LD6D02D010-EU6DR150210IC9030-6LBCSSQMW

Luminous Intensity Polar Plot

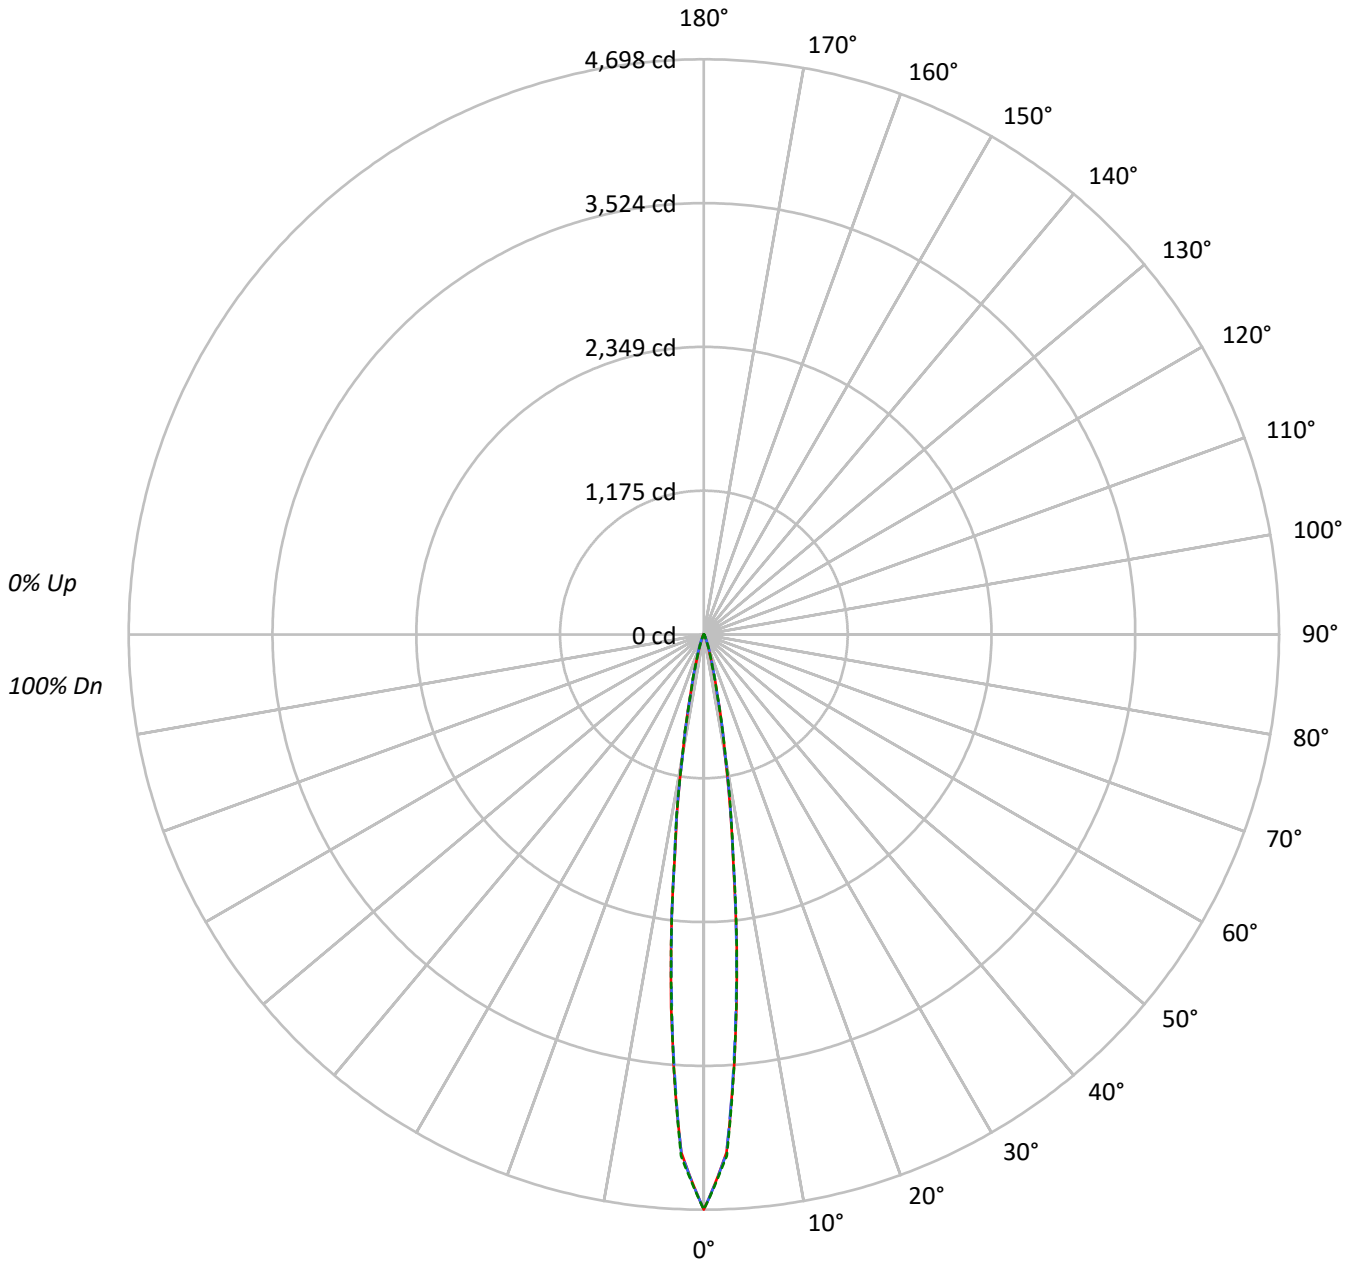



TEST NUMBER: P756913

CATALOG NUMBER: LD6D02D010-EU6DR150210IC9030-6LBCSSQMW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	116	114	112	111	113	112	110	109	108	107	106	104	103	103	101	100	100	98																			
2	113	110	107	105	111	108	106	104	105	103	102	102	101	100	100	98	98	96																			
3	110	106	103	101	108	105	102	100	103	100	99	100	99	97	98	97	96	94																			
4	108	103	100	98	106	102	99	97	100	98	96	99	97	95	97	95	94	93																			
5	106	101	98	95	104	100	97	95	98	96	94	97	95	93	96	94	92	92																			
6	104	99	95	93	102	98	95	93	97	94	92	96	93	92	95	93	91	90																			
7	102	97	93	91	101	96	93	91	95	93	91	94	92	90	93	91	90	89																			
8	100	95	92	90	99	95	92	90	94	91	89	93	91	89	92	90	89	88																			
9	99	93	90	88	98	93	90	88	92	90	88	92	89	88	91	89	87	87																			
10	97	92	89	87	96	92	89	87	91	89	87	91	88	87	90	88	86	86																			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	528562	528562	528562
5°	310608	306584	309013
10°	92701	93354	94782
15°	23060	23503	22783
20°	6898	7986	7045
25°	2431	3100	2462
30°	891	1176	906
35°	450	508	436
40°	284	312	284
45°	210	224	210
50°	167	167	167
55°	139	139	139
60°	112	112	112
65°	86	86	86
70°	73	73	73
75°	45	45	60
80°	32	32	32
85°	17	17	17

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 45°

Vertical Angle: 45°

Luminance: 224 cd/sqm



TEST NUMBER: P756913

CATALOG NUMBER: LD6D02D010-EU6DR150210IC9030-6LBCSSQMW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	223.6	64.8
10°-20°	92.0	26.7
20°-30°	18.3	5.3
30°-40°	4.6	1.3
40°-50°	2.4	0.7
50°-60°	1.8	0.5
60°-70°	1.3	0.4
70°-80°	0.7	0.2
80°-90°	0.2	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	333.9	96.8
0°-40°	338.4	98.1
0°-60°	342.6	99.4
0°-90°	344.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	344.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	4698	4698	4698	4698	4698	
5°	3056	3025	3017	3038	3041	223
15°	266	270	271	266	262	91
25°	31	35	40	35	32	16
35°	6	7	7	7	6	4
45°	3	3	3	3	3	2
55°	2	2	2	2	2	2
65°	1	1	1	1	1	1
75°	1	1	1	1	1	1
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P756913

CATALOG NUMBER: LD6D02D010-EU6DR150210IC9030-6LBCSSQMW

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	4697.5	4697.5	4697.5	4697.5	4697.5
2.5°	4237.3	4240.9	4242.3	4246.4	4262.0
5°	3056.3	3024.8	3016.7	3037.6	3040.6
7.5°	1810.4	1816.8	1840.0	1845.2	1826.5
10°	993.5	1001.7	1000.5	1007.6	1015.8
12.5°	508.1	501.7	499.7	507.9	496.6
15°	265.5	270.4	270.6	265.9	262.3
17.5°	142.8	148.5	158.1	150.3	138.4
20°	84.3	89.5	97.6	91.3	86.1
22.5°	52.1	56.3	62.0	57.1	52.9
25°	31.2	35.4	39.8	35.2	31.6
27.5°	18.5	22.1	24.9	21.9	18.3
30°	11.9	13.9	15.7	13.7	12.1
32.5°	8.4	9.1	9.9	9.1	8.4
35°	6.2	6.6	7.0	6.6	6.0
37.5°	4.8	5.2	5.4	5.0	4.6
40°	4.0	4.2	4.4	4.2	4.0
42.5°	3.4	3.6	3.6	3.6	3.4
45°	3.0	3.0	3.2	3.0	3.0
47.5°	2.6	2.6	2.8	2.6	2.6
50°	2.4	2.4	2.4	2.4	2.4
52.5°	2.2	2.2	2.2	2.2	2.2
55°	2.0	2.0	2.0	2.0	2.0
57.5°	1.8	1.8	1.8	1.8	1.8
60°	1.6	1.6	1.6	1.6	1.6
62.5°	1.4	1.4	1.4	1.4	1.4
65°	1.2	1.2	1.2	1.2	1.2
67.5°	1.2	1.2	1.2	1.2	1.2
70°	1.0	1.0	1.0	1.0	1.0
72.5°	0.8	0.8	0.8	0.8	0.8
75°	0.6	0.6	0.6	0.6	0.8
77.5°	0.6	0.6	0.6	0.6	0.6
80°	0.4	0.4	0.4	0.4	0.4
82.5°	0.4	0.4	0.4	0.4	0.4
85°	0.2	0.2	0.2	0.2	0.2
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180° - - 45°-225° - - - - 90°-270°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)