

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P757145

Luminaire Tested: LD6D02D010-EU6DR300210IC9030-6LBCSSQMB

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P757145  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-16)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D02D010-EU6DR300210IC9030-6LBCSSQMB  
Description: 6 INCH SQAURE SHALLOW CAST MATTE BLACK TRIM, WITH 30° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 323.2 lumens  
Efficiency: N/A  
Efficacy: 63.4 lumens/watt  
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.49  
Luminous Opening: Rectangular (W 0.38' x L: 0.38' x H: 0')  
CIE Type: Direct

Input Watts (W): 5.1  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P757145  
CATALOG NUMBER: LD6D02D010-EU6DR300210IC9030-6LBCSSQMB

### Luminous Intensity Polar Plot

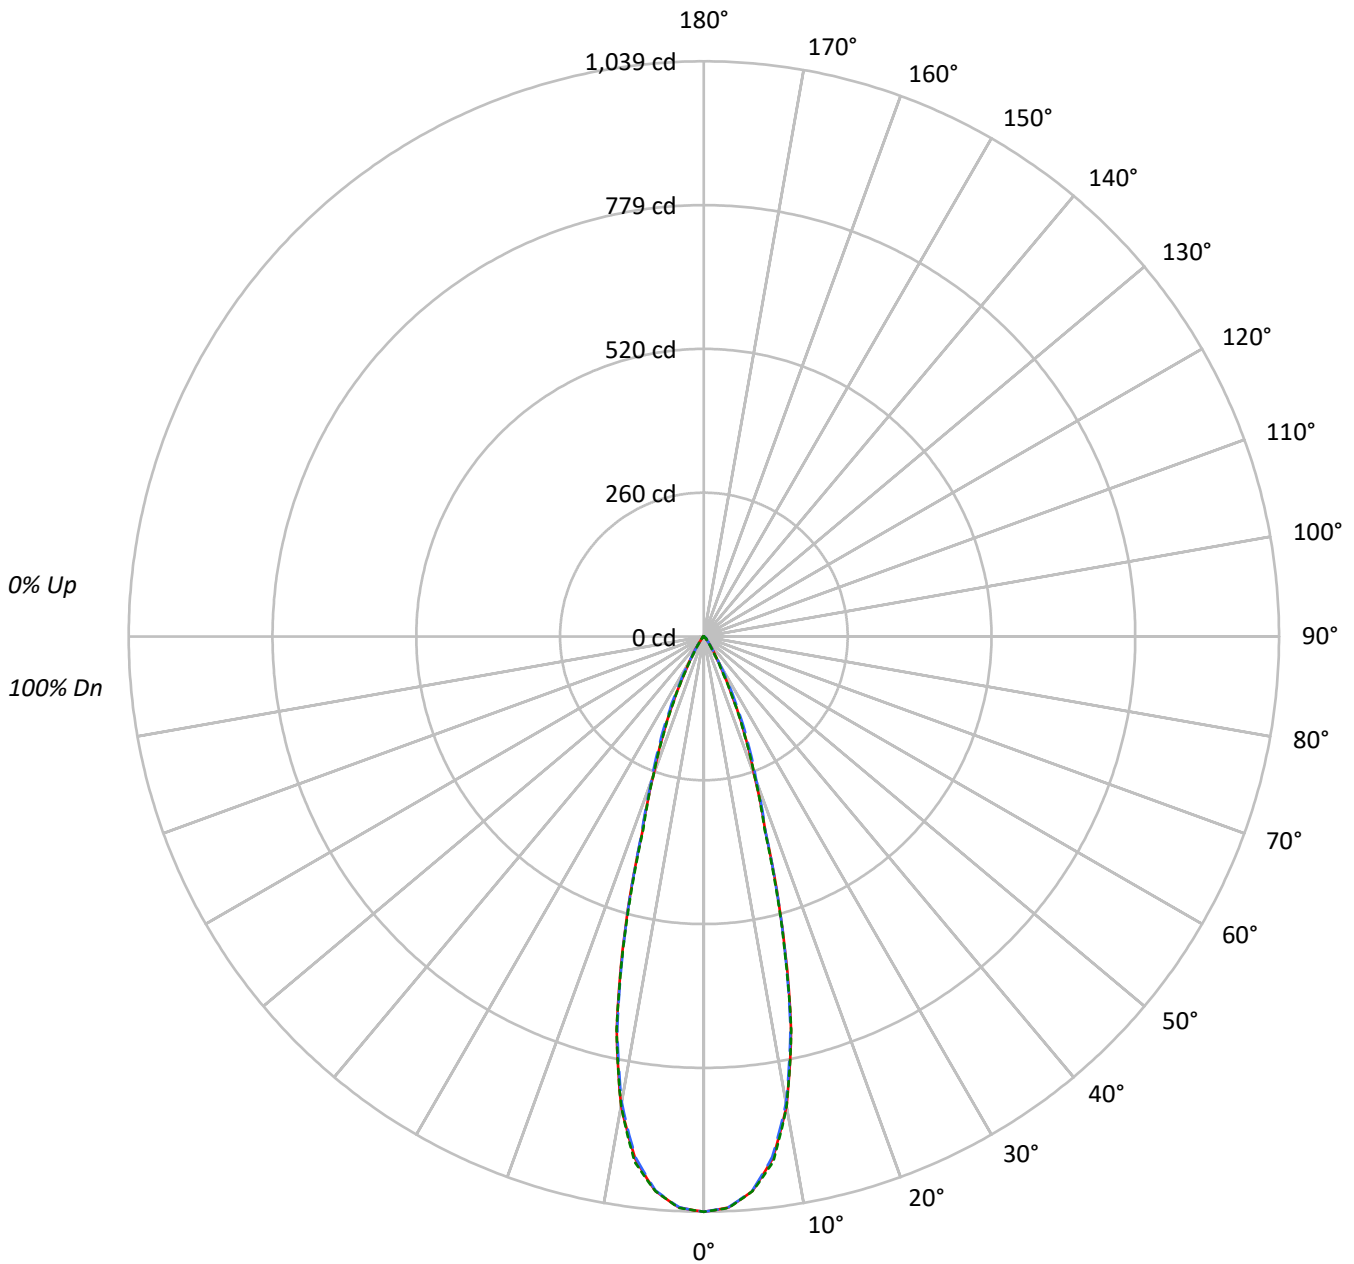



TEST NUMBER: P757145

CATALOG NUMBER: LD6D02D010-EU6DR300210IC9030-6LBCSSQMB

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96																			
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92																			
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89																			
4	103	98	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85																			
5	100	94	89	86	98	93	89	86	91	88	85	90	86	84	88	86	83	82																			
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79																			
7	94	87	82	79	92	86	82	79	85	81	78	84	81	78	83	80	78	77																			
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74																			
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72																			
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	79552	79552	79552
5°	77266	77174	77274
10°	66928	66454	66913
15°	43663	43433	43212
20°	21708	22531	21684
25°	10937	12331	10718
30°	4384	4773	3809
35°	2028	1944	1635
40°	879	969	829
45°	617	769	628
50°	214	560	226
55°	120	227	133
60°	92	107	92
65°	54	54	54
70°	45	22	45
75°	0	30	0
80°	0	0	0
85°	0	0	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 22.5°

Vertical Angle: 45°

Luminance: 769 cd/sqm



TEST NUMBER: P757145

CATALOG NUMBER: LD6D02D010-EU6DR300210IC9030-6LBCSSQMB

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	91.4	28.3
10°-20°	147.2	45.5
20°-30°	63.6	19.7
30°-40°	14.5	4.5
40°-50°	5.0	1.5
50°-60°	1.2	0.4
60°-70°	0.3	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	302.2	93.5
0°-40°	316.7	98.0
0°-60°	322.9	99.9
0°-90°	323.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	323.2	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1039	1039	1039	1039	1039	
5°	1006	1005	1004	1007	1006	91
15°	551	544	548	546	545	148
25°	130	134	146	131	127	62
35°	22	22	21	21	18	15
45°	6	7	7	7	6	4
55°	1	1	2	1	1	1
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P757145

CATALOG NUMBER: LD6D02D010-EU6DR300210IC9030-6LBCSSQMB

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	1039.3	1039.3	1039.3	1039.3	1039.3
2.5°	1032.4	1031.7	1032.1	1032.6	1032.8
5°	1005.6	1004.7	1004.4	1006.6	1005.7
7.5°	951.6	950.2	948.1	952.9	957.3
10°	861.1	859.5	855.0	857.2	860.9
12.5°	727.4	722.5	722.4	729.5	728.6
15°	551.0	544.4	548.1	546.3	545.3
17.5°	370.5	368.0	372.9	371.4	365.0
20°	266.5	267.2	276.6	271.9	266.2
22.5°	194.5	196.9	208.0	195.9	191.4
25°	129.5	134.4	146.0	131.0	126.9
27.5°	79.6	81.9	93.7	78.6	76.4
30°	49.6	48.4	54.0	46.4	43.1
32.5°	32.5	31.1	32.9	29.5	26.9
35°	21.7	22.2	20.8	20.7	17.5
37.5°	13.6	15.6	13.8	14.7	11.2
40°	8.8	11.3	9.7	10.8	8.3
42.5°	7.2	8.7	8.0	8.5	7.3
45°	5.7	7.1	7.1	7.1	5.8
47.5°	3.2	4.8	6.1	4.9	3.4
50°	1.8	2.4	4.7	2.5	1.9
52.5°	1.2	1.4	3.2	1.4	1.3
55°	0.9	1.0	1.7	1.0	1.0
57.5°	0.7	0.7	0.9	0.7	0.7
60°	0.6	0.6	0.7	0.6	0.6
62.5°	0.4	0.4	0.5	0.4	0.4
65°	0.3	0.3	0.3	0.3	0.3
67.5°	0.2	0.2	0.2	0.2	0.2
70°	0.2	0.1	0.1	0.1	0.2
72.5°	0.1	0.1	0.1	0.1	0.1
75°	0.0	0.0	0.1	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report







— 0°-180°    - - 45°-225°    - - - - 90°-270°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)