

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P757235

Luminaire Tested: LD6D02D010-EU6DR350210IC9030-6LBSQW1MW

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P757235  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-20)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D02D010-EU6DR350210IC9030-6LBSQW1MW  
Description: 6 INCH SQAURE DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 35° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 316.9 lumens  
Efficiency: N/A  
Efficacy: 62.1 lumens/watt  
Spacing Criteria (0/90/45): 0.6 / 0.6 / 0.54  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 5.1  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P757235

CATALOG NUMBER: LD6D02D010-EU6DR350210IC9030-6LBSQW1MW

### Luminous Intensity Polar Plot

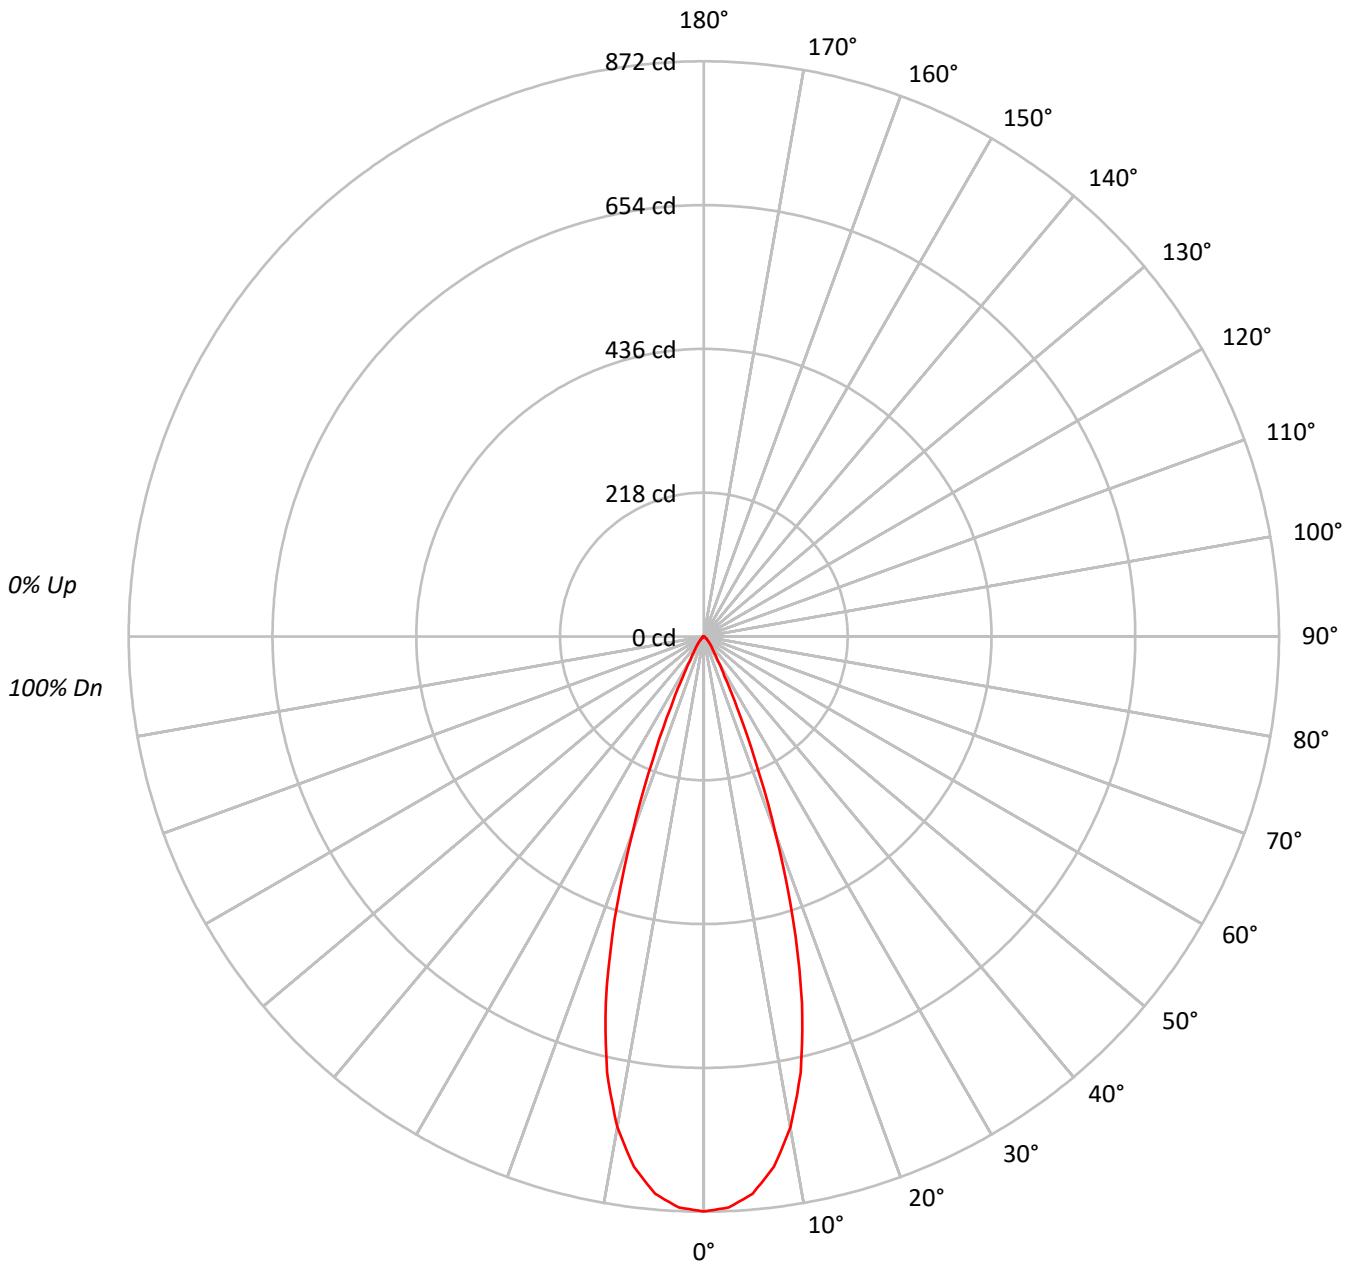



TEST NUMBER: P757235

CATALOG NUMBER: LD6D02D010-EU6DR350210IC9030-6LBSQW1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100															
1	115	112	110	108	112	110	108	107	106	105	103	103	101	100	99	98	98	96				96															
2	110	106	103	100	108	105	102	99	102	99	97	99	97	95	96	95	93	92				92															
3	106	101	97	94	105	100	96	93	97	94	92	95	93	91	93	91	89	88				88															
4	103	97	92	89	101	96	92	89	94	90	88	92	89	87	90	88	86	84				84															
5	99	93	88	85	98	92	87	84	90	86	84	88	85	83	87	84	82	81				81															
6	96	89	84	81	94	88	84	81	87	83	80	85	82	80	84	81	79	78				78															
7	92	85	81	77	91	85	80	77	84	80	77	83	79	77	82	78	76	75				75															
8	90	82	78	74	88	82	77	74	81	77	74	80	76	74	79	76	73	72				72															
9	87	79	75	72	86	79	75	72	78	74	71	77	74	71	77	73	71	70				70															
10	84	77	72	69	83	76	72	69	75	72	69	75	71	69	74	71	69	68				68															

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	95243
5°	93007
10°	83820
15°	65052
20°	36905
25°	14358
30°	5362
35°	2934
40°	1926
45°	1174
50°	748
55°	533
60°	393
65°	207
70°	32
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 1174 cd/sqm



TEST NUMBER: P757235

CATALOG NUMBER: LD6D02D010-EU6DR350210IC9030-6LBSQW1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	78.0	24.6
10°-20°	152.3	48.0
20°-30°	62.1	19.6
30°-40°	14.9	4.7
40°-50°	6.2	2.0
50°-60°	2.6	0.8
60°-70°	0.8	0.3
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	292.4	92.3
0°-40°	307.2	96.9
0°-60°	316.0	99.7
0°-90°	316.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	316.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	872	
5°	848	78
15°	575	152
25°	119	62
35°	22	15
45°	8	6
55°	3	3
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P757235

CATALOG NUMBER: LD6D02D010-EU6DR350210IC9030-6LBSQW1MW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	871.7
2.5°	866.5
5°	848.0
7.5°	811.1
10°	755.5
12.5°	677.3
15°	575.1
17.5°	450.3
20°	317.4
22.5°	202.4
25°	119.1
27.5°	67.3
30°	42.5
32.5°	29.8
35°	22.0
37.5°	17.0
40°	13.5
42.5°	10.4
45°	7.6
47.5°	5.7
50°	4.4
52.5°	3.5
55°	2.8
57.5°	2.2
60°	1.8
62.5°	1.3
65°	0.8
67.5°	0.3
70°	0.1
72.5°	0.1
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.1
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)