

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P757780

Luminaire Tested: LD6D02D010-EU6DR700210IC9030-6LBSQW1B

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P757780
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-73)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D02D010-EU6DR700210IC9030-6LBSQW1B
Description: 6 INCH SQAURE DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 70° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 226.0 lumens
Efficiency: N/A
Efficacy: 44.3 lumens/watt
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.82
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 5.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P757780
CATALOG NUMBER: LD6D02D010-EU6DR700210IC9030-6LBSQW1B

Luminous Intensity Polar Plot

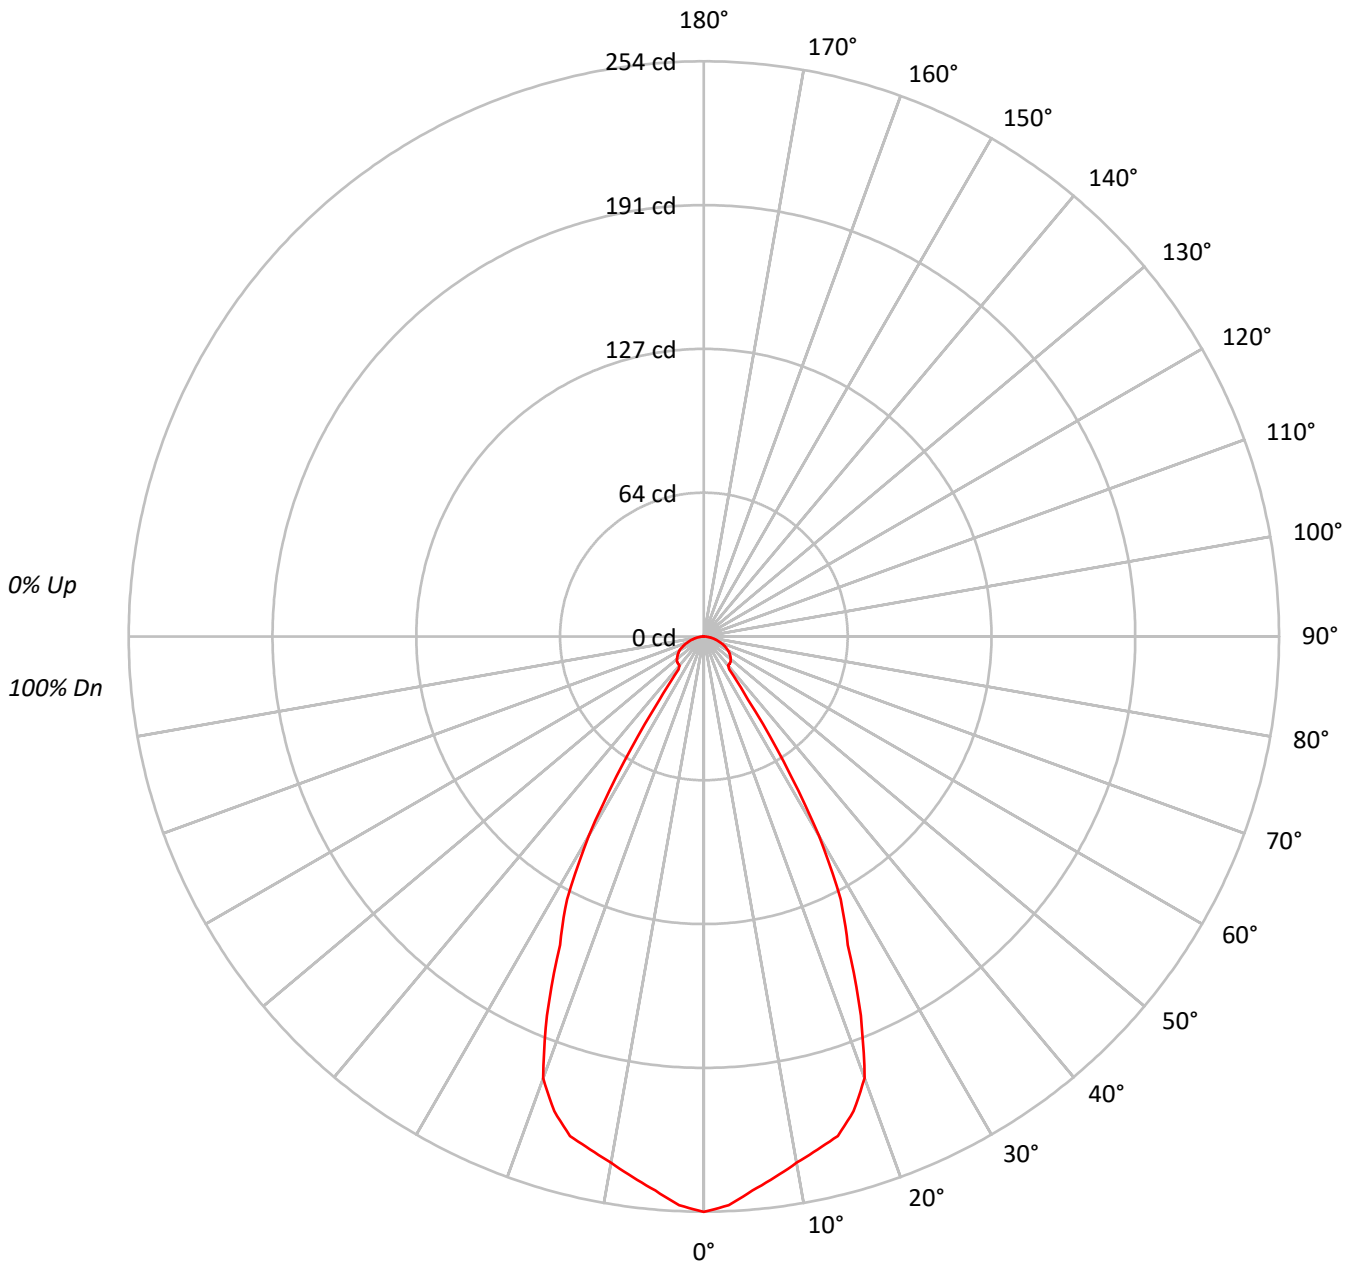



TEST NUMBER: P757780

CATALOG NUMBER: LD6D02D010-EU6DR700210IC9030-6LBSQW1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	112	109	106	103	110	107	104	102	103	101	99	99	97	96	95	94	93	91																			
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	85	83																			
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78	76																			
4	94	86	80	75	92	85	79	74	82	77	73	80	76	73	78	75	72	70																			
5	89	80	74	69	88	79	73	69	77	72	68	75	71	67	74	70	67	65																			
6	85	75	68	64	83	74	68	64	73	67	63	71	66	63	70	66	62	61																			
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57																			
8	77	66	60	56	75	66	60	56	65	59	55	64	59	55	63	58	55	53																			
9	73	63	57	52	72	62	56	52	61	56	52	60	55	52	60	55	52	50																			
10	70	59	53	49	69	59	53	49	58	53	49	57	52	49	57	52	49	48																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	27763
5°	26937
10°	26183
15°	25835
20°	24127
25°	18132
30°	12818
35°	4535
40°	2382
45°	2534
50°	2635
55°	2686
60°	2710
65°	2637
70°	2492
75°	2280
80°	2076
85°	1630

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 60°
 Luminance: 2710 cd/sqm



TEST NUMBER: P757780

CATALOG NUMBER: LD6D02D010-EU6DR700210IC9030-6LBSQW1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	23.2	10.3
10°-20°	63.5	28.1
20°-30°	70.0	31.0
30°-40°	26.7	11.8
40°-50°	12.6	5.6
50°-60°	12.6	5.6
60°-70°	10.0	4.4
70°-80°	5.8	2.5
80°-90°	1.6	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	156.7	69.3
0°-40°	183.4	81.2
0°-60°	208.6	92.3
0°-90°	226.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	226.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	254	
5°	246	23
15°	228	64
25°	150	70
35°	34	27
45°	16	13
55°	14	13
65°	10	10
75°	5	6
85°	1	2
90°	0	



TEST NUMBER: P757780

CATALOG NUMBER: LD6D02D010-EU6DR700210IC9030-6LBSQW1B

CANDELA DISTRIBUTION (FULL):

	0°
0°	254.1
2.5°	251.4
5°	245.6
7.5°	240.8
10°	236.0
12.5°	232.0
15°	228.4
17.5°	219.8
20°	207.5
22.5°	181.1
25°	150.4
27.5°	130.9
30°	101.6
32.5°	65.6
35°	34.0
37.5°	18.4
40°	16.7
42.5°	16.6
45°	16.4
47.5°	16.1
50°	15.5
52.5°	14.8
55°	14.1
57.5°	13.3
60°	12.4
62.5°	11.3
65°	10.2
67.5°	9.0
70°	7.8
72.5°	6.6
75°	5.4
77.5°	4.3
80°	3.3
82.5°	2.3
85°	1.3
87.5°	0.5
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)