

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P757185

Luminaire Tested: LD6D02D010-EU6DR300210IC9050-6LBCSSQMMS

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P757185
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-16)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D02D010-EU6DR300210IC9050-6LBCSSQMMS
Description: 6 INCH SQAURE SHALLOW CAST MATTE METALLIC SILVER TRIM, WITH 30° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 346.5 lumens
Efficiency: N/A
Efficacy: 67.9 lumens/watt
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.49
Luminous Opening: Rectangular (W 0.38' x L: 0.38' x H: 0')
CIE Type: Direct

Input Watts (W): 5.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P757185
CATALOG NUMBER: LD6D02D010-EU6DR300210IC9050-6LBCSSQMMS

Luminous Intensity Polar Plot

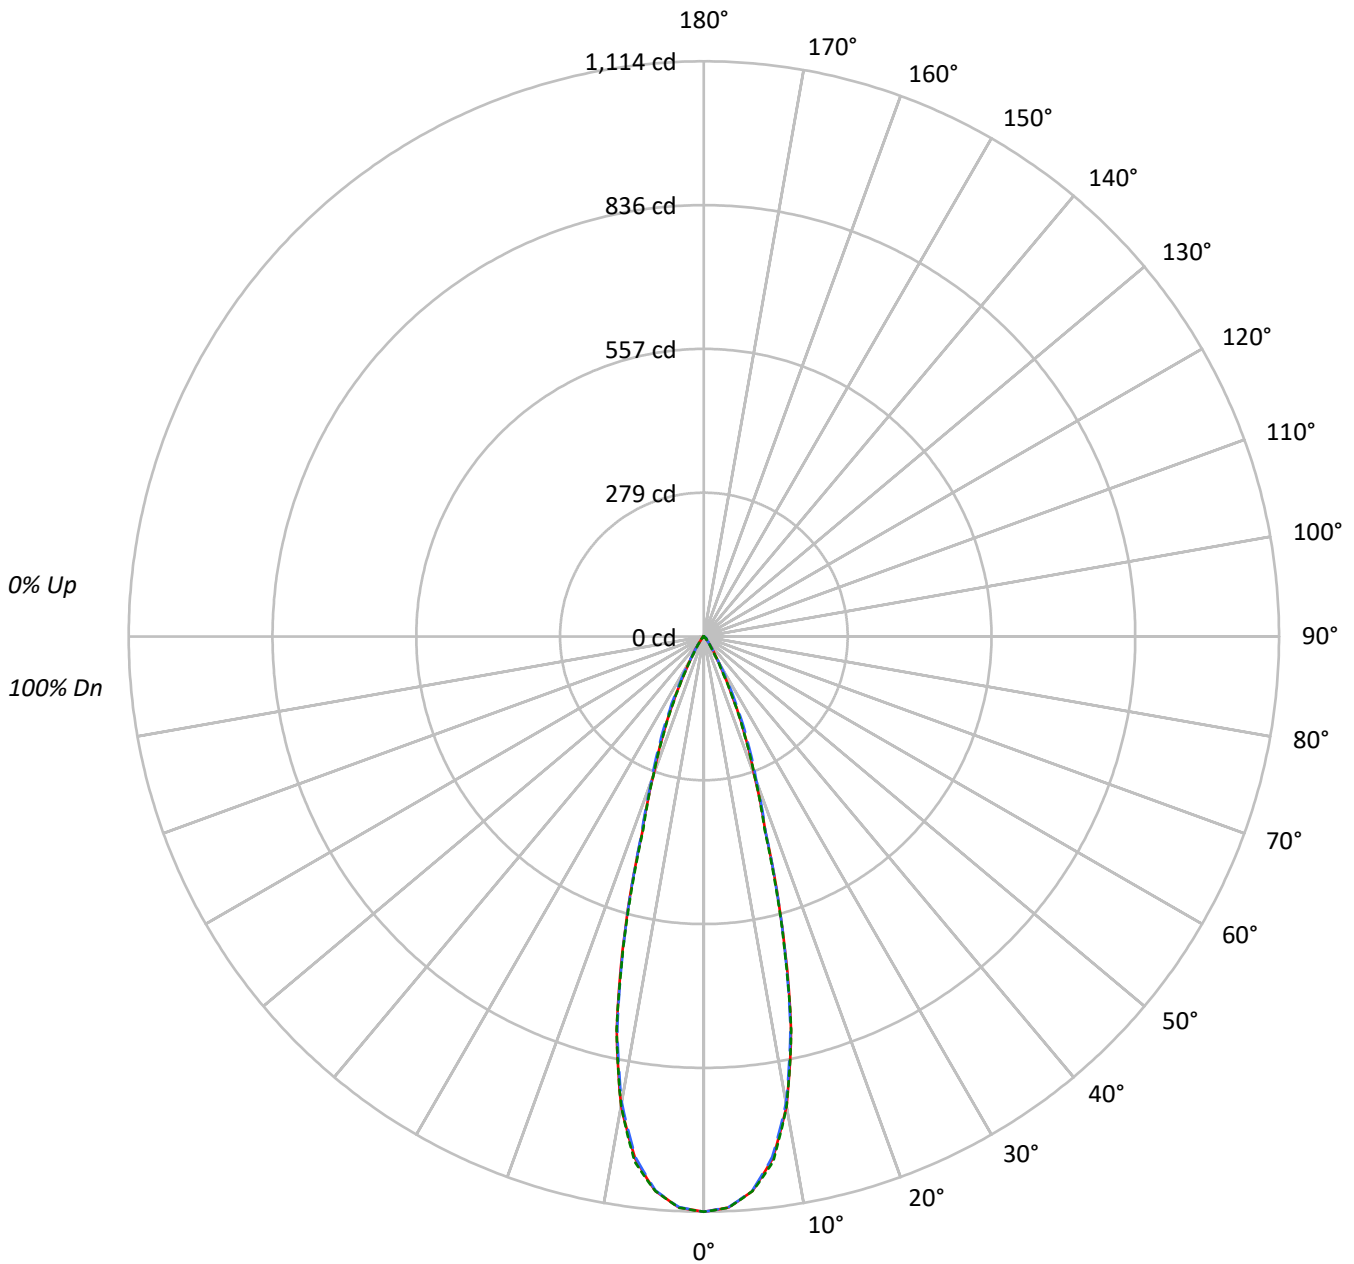



TEST NUMBER: P757185

CATALOG NUMBER: LD6D02D010-EU6DR300210IC9050-6LBCSSQMMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96																			
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92																			
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89																			
4	103	98	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85																			
5	100	94	89	86	98	93	89	86	91	88	85	90	86	84	88	86	83	82																			
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79																			
7	94	87	82	79	92	86	82	79	85	81	78	84	81	78	83	80	78	77																			
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74																			
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72																			
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69																			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	85285	85285	85285
5°	82837	82744	82844
10°	71747	71242	71732
15°	46817	46564	46326
20°	23280	24152	23247
25°	11723	13226	11486
30°	4693	5117	4092
35°	2177	2084	1747
40°	939	1039	889
45°	660	823	671
50°	226	595	238
55°	133	240	133
60°	92	107	92
65°	54	54	54
70°	45	22	45
75°	0	30	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 22.5°

Vertical Angle: 45°

Luminance: 823 cd/sqm



TEST NUMBER: P757185

CATALOG NUMBER: LD6D02D010-EU6DR300210IC9050-6LBCSSQMMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	98.0	28.3
10°-20°	157.8	45.5
20°-30°	68.2	19.7
30°-40°	15.5	4.5
40°-50°	5.3	1.5
50°-60°	1.3	0.4
60°-70°	0.3	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	324.0	93.5
0°-40°	339.5	98.0
0°-60°	346.1	99.9
0°-90°	346.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	346.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1114	1114	1114	1114	1114	
5°	1078	1077	1077	1079	1078	98
15°	591	584	588	586	585	158
25°	139	144	157	140	136	66
35°	23	24	22	22	19	16
45°	6	8	8	8	6	4
55°	1	1	2	1	1	1
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P757185

CATALOG NUMBER: LD6D02D010-EU6DR300210IC9050-6LBCSSQMMS

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1114.2	1114.2	1114.2	1114.2	1114.2
2.5°	1106.8	1106.1	1106.5	1107.1	1107.3
5°	1078.1	1077.1	1076.9	1079.1	1078.2
7.5°	1020.2	1018.7	1016.5	1021.5	1026.3
10°	923.1	921.5	916.6	919.0	922.9
12.5°	779.8	774.6	774.5	782.1	781.0
15°	590.8	583.6	587.6	585.7	584.6
17.5°	397.3	394.5	399.7	398.2	391.3
20°	285.8	286.5	296.5	291.5	285.4
22.5°	208.6	211.1	223.0	210.0	205.2
25°	138.8	144.1	156.6	140.4	136.0
27.5°	85.4	87.8	100.4	84.3	81.9
30°	53.1	51.9	57.9	49.7	46.3
32.5°	34.8	33.3	35.2	31.6	28.9
35°	23.3	23.8	22.3	22.2	18.7
37.5°	14.6	16.7	14.8	15.8	12.0
40°	9.4	12.1	10.4	11.5	8.9
42.5°	7.7	9.3	8.6	9.1	7.8
45°	6.1	7.6	7.6	7.6	6.2
47.5°	3.4	5.1	6.5	5.2	3.6
50°	1.9	2.6	5.0	2.7	2.0
52.5°	1.3	1.5	3.4	1.5	1.4
55°	1.0	1.0	1.8	1.1	1.0
57.5°	0.7	0.8	1.0	0.8	0.7
60°	0.6	0.6	0.7	0.6	0.6
62.5°	0.5	0.5	0.5	0.5	0.5
65°	0.3	0.3	0.3	0.3	0.3
67.5°	0.2	0.2	0.2	0.2	0.2
70°	0.2	0.1	0.1	0.1	0.2
72.5°	0.1	0.1	0.1	0.1	0.1
75°	0.0	0.0	0.1	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180° - - 45°-225° - - - - 90°-270°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)