

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P763573

Luminaire Tested: LD6D25D010-EU6DR6020359024-6LBSQW1MW

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P763573
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-57)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D25D010-EU6DR6020359024-6LBSQW1MW
Description: 6 INCH SQAURE DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 60° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2230.1 lumens
Efficiency: N/A
Efficacy: 88.8 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.83
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 25.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P763573

CATALOG NUMBER: LD6D25D010-EU6DR6020359024-6LBSQW1MW

Luminous Intensity Polar Plot

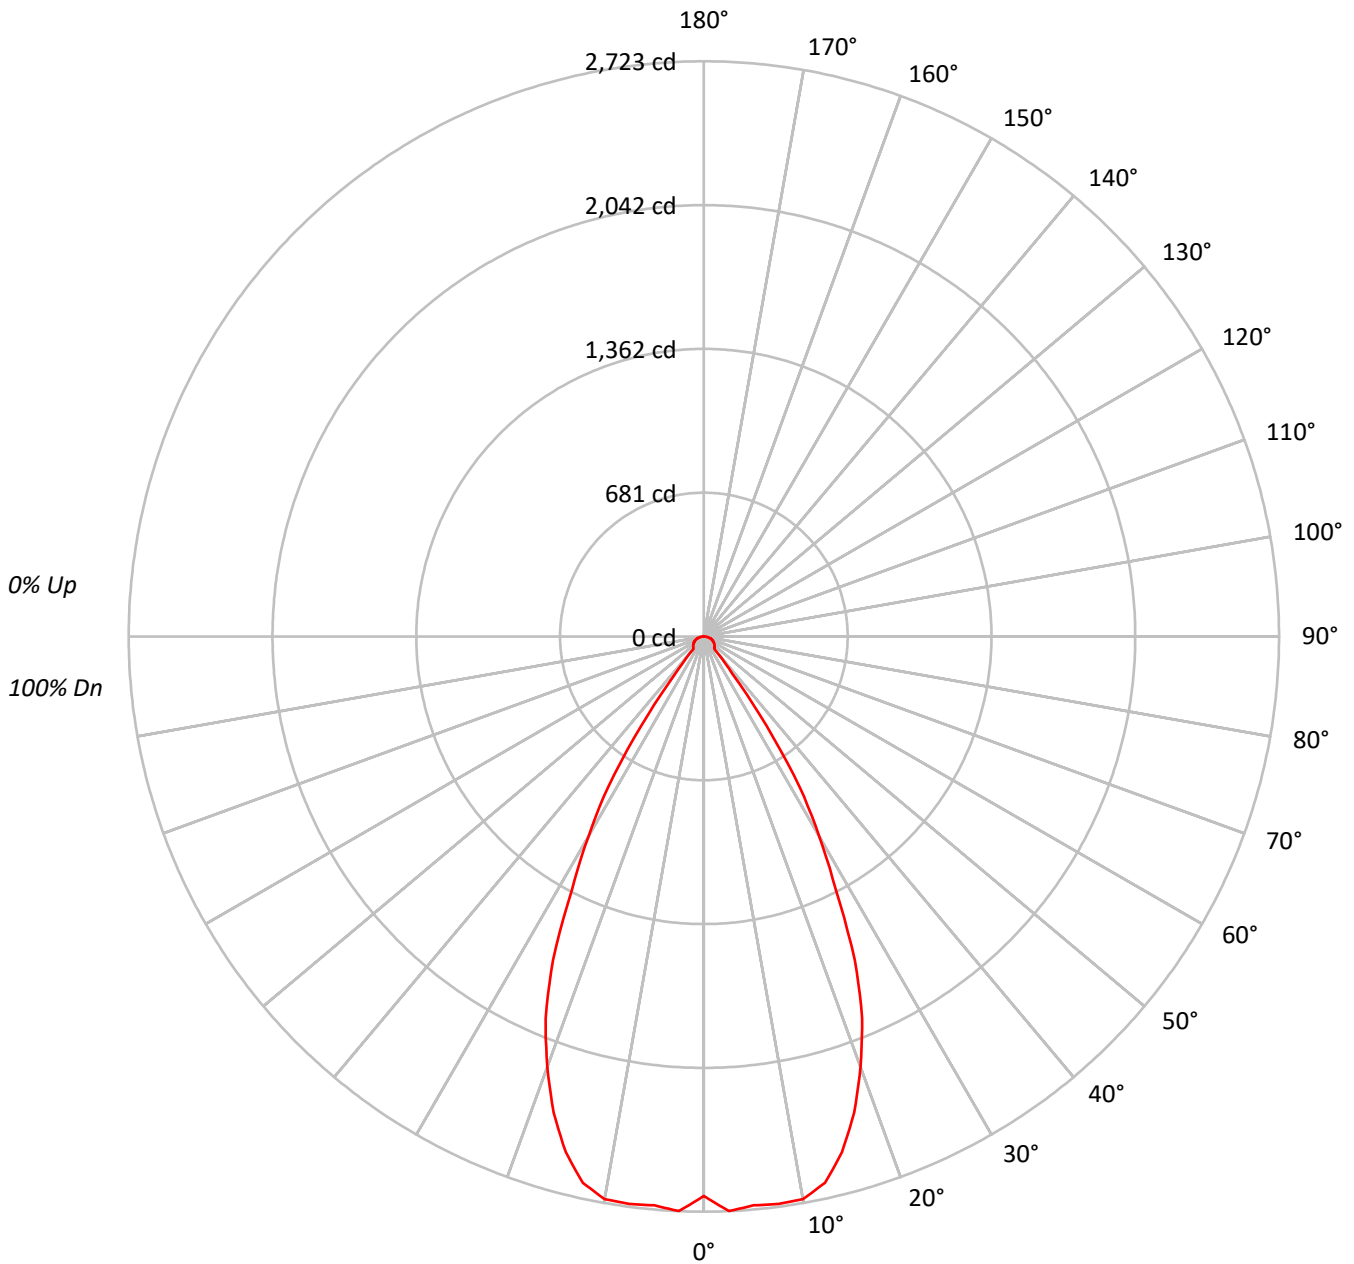



TEST NUMBER: P763573

CATALOG NUMBER: LD6D25D010-EU6DR6020359024-6LBSQW1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93			93																
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86			86																
3	102	96	90	86	100	94	89	86	91	88	84	89	86	83	87	84	82	80			80																
4	97	89	84	80	95	88	83	79	86	82	78	84	80	77	82	79	76	75			75																
5	92	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70			70																
6	88	79	73	69	87	78	73	69	77	72	68	75	71	68	74	70	67	66			66																
7	84	75	69	65	83	74	68	64	73	68	64	72	67	64	71	67	63	62			62																
8	80	71	65	61	79	70	65	61	69	64	60	68	64	60	67	63	60	59			59																
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55			55																
10	73	64	58	54	72	63	58	54	62	58	54	62	57	54	61	57	54	53			53																

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	289366
5°	296482
10°	300065
15°	285853
20°	252033
25°	203848
30°	137884
35°	69092
40°	11211
45°	10971
50°	11185
55°	11353
60°	11669
65°	11944
70°	12235
75°	12369
80°	11955
85°	9904

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 75°
 Luminance: 12369 cd/sqm



TEST NUMBER: P763573

CATALOG NUMBER: LD6D25D010-EU6DR6020359024-6LBSQW1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	258.4	11.6
10°-20°	699.0	31.3
20°-30°	752.1	33.7
30°-40°	326.9	14.7
40°-50°	54.9	2.5
50°-60°	53.4	2.4
60°-70°	45.7	2.0
70°-80°	30.6	1.4
80°-90°	9.2	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1709.4	76.7
0°-40°	2036.3	91.3
0°-60°	2144.6	96.2
0°-90°	2230.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2230.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2648	
5°	2703	258
15°	2527	699
25°	1691	752
35°	518	327
45°	71	55
55°	60	53
65°	46	46
75°	29	31
85°	8	9
90°	0	



TEST NUMBER: P763573

CATALOG NUMBER: LD6D25D010-EU6DR6020359024-6LBSQW1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	2648.4
2.5°	2722.8
5°	2703.2
7.5°	2709.4
10°	2704.6
12.5°	2648.8
15°	2527.1
17.5°	2363.7
20°	2167.6
22.5°	1957.7
25°	1690.9
27.5°	1352.5
30°	1092.9
32.5°	842.4
35°	518.0
37.5°	221.6
40°	78.6
42.5°	72.4
45°	71.0
47.5°	68.6
50°	65.8
52.5°	62.7
55°	59.6
57.5°	56.6
60°	53.4
62.5°	50.0
65°	46.2
67.5°	42.4
70°	38.3
72.5°	33.8
75°	29.3
77.5°	24.1
80°	19.0
82.5°	13.5
85°	7.9
87.5°	2.8
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)