

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P763641

Luminaire Tested: LD6D25D010-EU6DR6520359024-6LBCSSQMW

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P763641
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D25D010-EU6DR6520359024-6LBCSSQMW
Description: 6 INCH SQAURE SHALLOW CAST MATTE WHITE TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2217.5 lumens
Efficiency: N/A
Efficacy: 88.3 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96
Luminous Opening: Circular (Dia: 0.48' x H: 0')
CIE Type: Direct

Input Watts (W): 25.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P763641

CATALOG NUMBER: LD6D25D010-EU6DR6520359024-6LBCSSQMW

Luminous Intensity Polar Plot

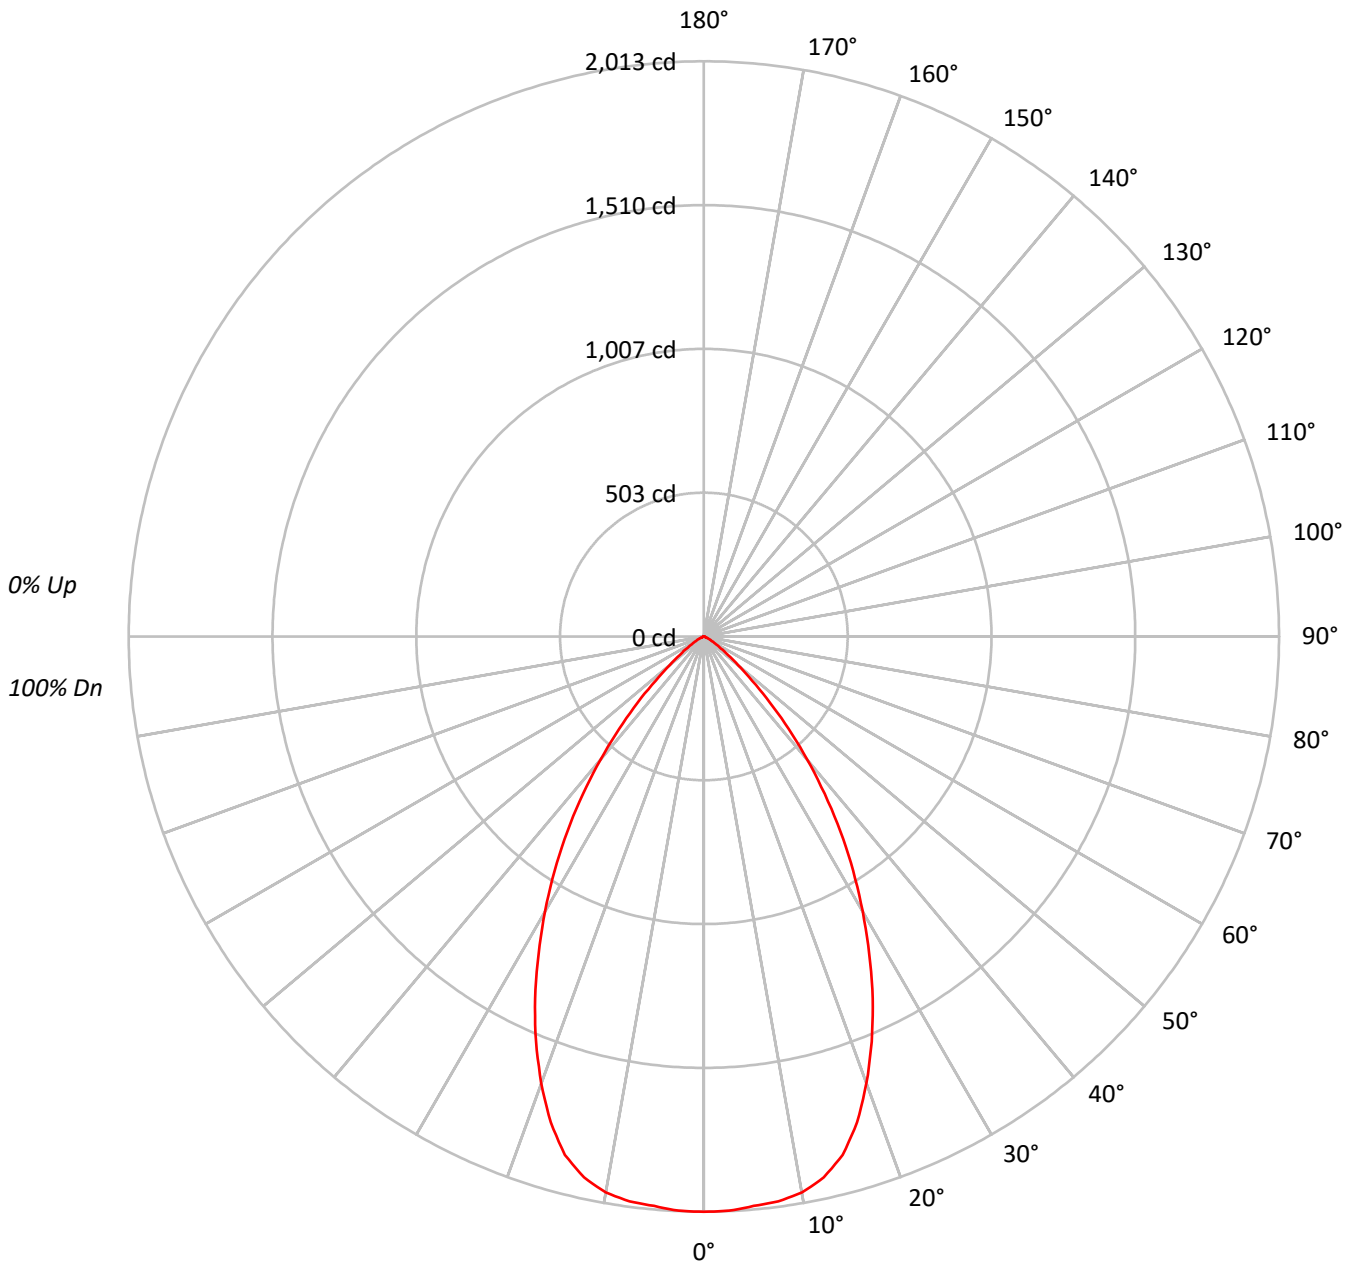



TEST NUMBER: P763641

CATALOG NUMBER: LD6D25D010-EU6DR6520359024-6LBCSSQMW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93			93																
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85			85																
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78			78																
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72			72																
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66			66																
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61			61																
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56			56																
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52			52																
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49			49																
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46			46																

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	117590
5°	117295
10°	117198
15°	113582
20°	103402
25°	90109
30°	74945
35°	59384
40°	42863
45°	27075
50°	14111
55°	7504
60°	3936
65°	2170
70°	905
75°	993
80°	706
85°	603

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 27075 cd/sqm



TEST NUMBER: P763641

CATALOG NUMBER: LD6D25D010-EU6DR6520359024-6LBCSSQMW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	190.4	8.6
10°-20°	521.4	23.5
20°-30°	637.3	28.7
30°-40°	517.1	23.3
40°-50°	257.7	11.6
50°-60°	71.9	3.2
60°-70°	16.3	0.7
70°-80°	4.2	0.2
80°-90°	1.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1349.1	60.8
0°-40°	1866.3	84.2
0°-60°	2195.8	99.0
0°-90°	2217.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2217.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2013	
5°	2001	190
15°	1878	521
25°	1398	637
35°	833	517
45°	328	258
55°	74	72
65°	16	16
75°	4	4
85°	1	1
90°	0	



TEST NUMBER: P763641

CATALOG NUMBER: LD6D25D010-EU6DR6520359024-6LBCSSQMW

CANDELA DISTRIBUTION (FULL):

0°	
0°	2013.4
2.5°	2011.9
5°	2000.7
7.5°	1994.2
10°	1976.2
12.5°	1939.4
15°	1878.5
17.5°	1783.3
20°	1663.7
22.5°	1534.7
25°	1398.3
27.5°	1252.4
30°	1111.3
32.5°	972.0
35°	832.9
37.5°	694.1
40°	562.2
42.5°	438.5
45°	327.8
47.5°	228.4
50°	155.3
52.5°	107.1
55°	73.7
57.5°	49.7
60°	33.7
62.5°	23.4
65°	15.7
67.5°	8.0
70°	5.3
72.5°	5.0
75°	4.4
77.5°	3.0
80°	2.1
82.5°	1.5
85°	0.9
87.5°	0.6
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)