

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P763729

Luminaire Tested: LD6D25D010-EU6DR7020359024-6LBSQW1MW

Issue Date: 2/5/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P763729  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-73)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/5/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D25D010-EU6DR7020359024-6LBSQW1MW  
Description: 6 INCH SQAURE DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 70° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2054.3 lumens  
Efficiency: N/A  
Efficacy: 81.8 lumens/watt  
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.82  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 25.1  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P763729

CATALOG NUMBER: LD6D25D010-EU6DR7020359024-6LBSQW1MW

### Luminous Intensity Polar Plot

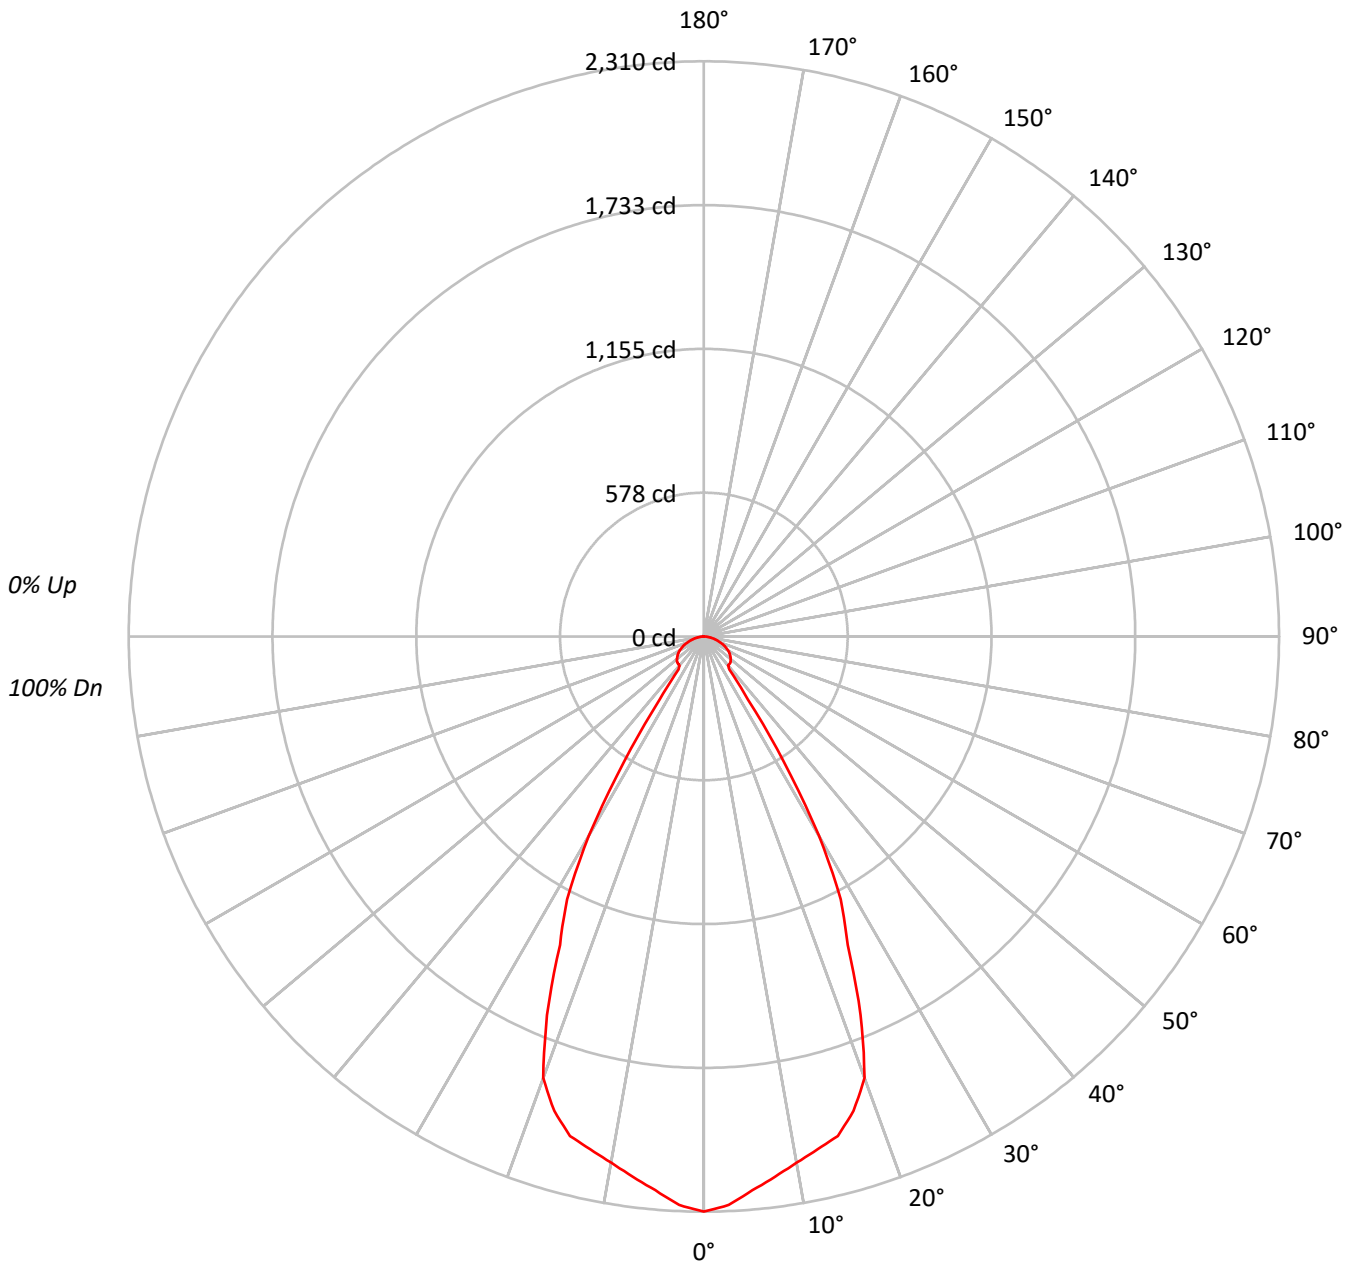



TEST NUMBER: P763729

CATALOG NUMBER: LD6D25D010-EU6DR7020359024-6LBSQW1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	112	109	106	103	110	107	104	102	103	101	99	99	97	96	95	94	93	91		
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	85	83		
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78	76		
4	94	86	80	75	92	85	79	74	82	77	73	80	76	73	78	75	72	70		
5	89	80	74	69	87	79	73	69	77	72	68	75	71	67	74	70	67	65		
6	85	75	68	64	83	74	68	64	73	67	63	71	66	63	70	66	62	61		
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57		
8	77	66	60	56	75	66	60	56	65	59	55	64	59	55	63	58	55	53		
9	73	63	57	52	72	62	56	52	61	56	52	60	55	52	60	55	52	50		
10	70	59	53	49	69	59	53	49	58	53	49	57	52	49	57	52	49	48		

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	252349
5°	244845
10°	238024
15°	234906
20°	219349
25°	164788
30°	116487
35°	41255
40°	21694
45°	23100
50°	23933
55°	24383
60°	24518
65°	24018
70°	22650
75°	20981
80°	18625
85°	15169

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 57.5°  
 Luminance: 24545 cd/sqm



TEST NUMBER: P763729

CATALOG NUMBER: LD6D25D010-EU6DR7020359024-6LBSQW1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	210.6	10.3
10°-20°	577.6	28.1
20°-30°	636.1	31.0
30°-40°	243.0	11.8
40°-50°	114.7	5.6
50°-60°	114.1	5.6
60°-70°	91.3	4.4
70°-80°	52.5	2.6
80°-90°	14.3	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1424.3	69.3
0°-40°	1667.3	81.2
0°-60°	1896.1	92.3
0°-90°	2054.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2054.3	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2310	
5°	2232	211
15°	2077	578
25°	1367	636
35°	309	243
45°	150	115
55°	128	114
65°	93	91
75°	50	52
85°	12	14
90°	0	



TEST NUMBER: P763729

CATALOG NUMBER: LD6D25D010-EU6DR7020359024-6LBSQW1MW

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	2309.6
2.5°	2285.5
5°	2232.4
7.5°	2188.2
10°	2145.4
12.5°	2109.2
15°	2076.7
17.5°	1998.1
20°	1886.5
22.5°	1645.9
25°	1366.9
27.5°	1189.9
30°	923.3
32.5°	596.4
35°	309.3
37.5°	167.1
40°	152.1
42.5°	151.0
45°	149.5
47.5°	146.3
50°	140.8
52.5°	134.6
55°	128.0
57.5°	120.7
60°	112.2
62.5°	102.7
65°	92.9
67.5°	81.9
70°	70.9
72.5°	60.0
75°	49.7
77.5°	39.1
80°	29.6
82.5°	20.9
85°	12.1
87.5°	4.8
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)