

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P763186

Luminaire Tested: LD6D25D010-EU6DR3520359027-6LBCSSQMW

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P763186  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-20)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D25D010-EU6DR3520359027-6LBCSSQMW  
Description: 6 INCH SQAURE SHALLOW CAST MATTE WHITE TRIM, WITH 35° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2566.8 lumens  
Efficiency: N/A  
Efficacy: 102.3 lumens/watt  
Spacing Criteria (0/90/45): 0.6 / 0.6 / 0.54  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 25.1  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P763186  
CATALOG NUMBER: LD6D25D010-EU6DR3520359027-6LBCSSQMW

### Luminous Intensity Polar Plot

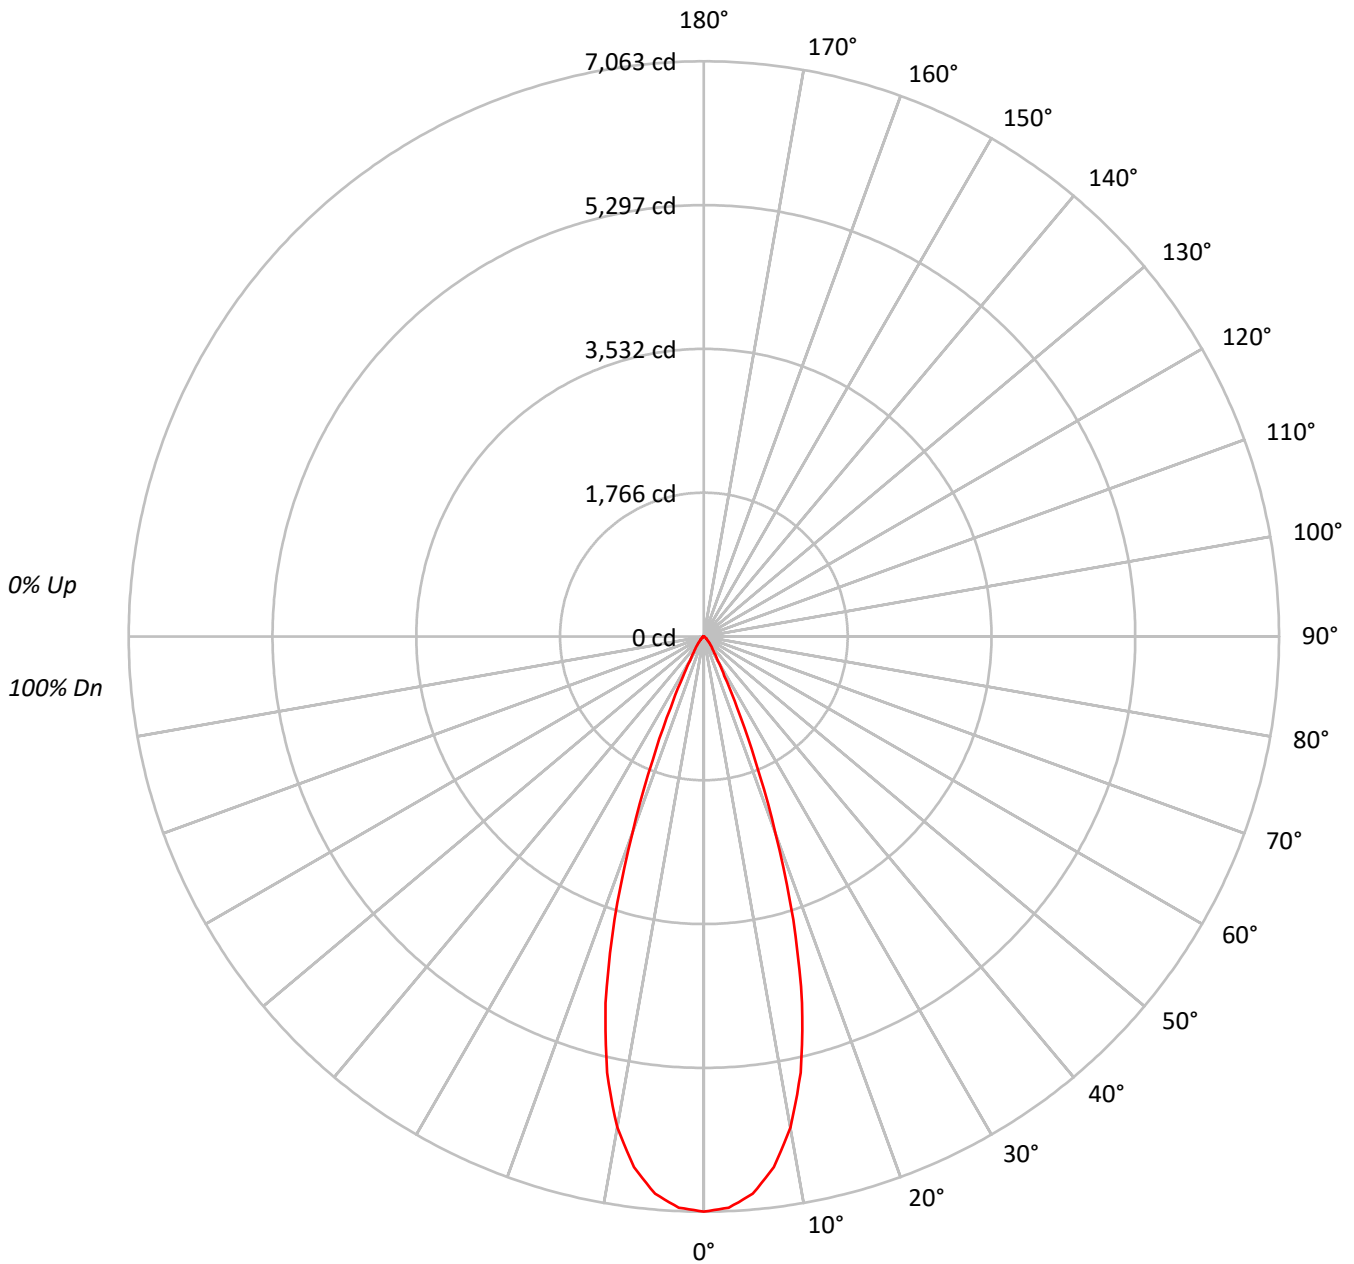



TEST NUMBER: P763186  
 CATALOG NUMBER: LD6D25D010-EU6DR3520359027-6LBCSSQMW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	115	112	110	108	112	110	108	107	106	105	103	103	101	100	99	98	98	96			96																
2	110	106	103	101	108	105	102	99	102	99	97	99	97	95	96	95	93	92			92																
3	106	101	97	94	105	100	96	93	97	95	92	95	93	91	93	91	89	88			88																
4	103	97	92	89	101	96	92	89	94	90	88	92	89	87	90	88	86	84			84																
5	99	93	88	85	98	92	87	84	90	86	84	89	85	83	87	84	82	81			81																
6	96	89	84	81	94	88	84	81	87	83	80	85	82	80	84	81	79	78			78																
7	93	85	81	78	91	85	80	77	84	80	77	83	79	77	82	79	76	75			75																
8	90	82	78	74	88	82	77	74	81	77	74	80	76	74	79	76	73	72			72																
9	87	79	75	72	86	79	75	72	78	74	71	77	74	71	77	73	71	70			70																
10	84	77	72	69	83	76	72	69	76	72	69	75	71	69	74	71	69	68			68																

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	771665
5°	753533
10°	679135
15°	527116
20°	298972
25°	116312
30°	43388
35°	23782
40°	15547
45°	9457
50°	6017
55°	4248
60°	3125
65°	1680
70°	128
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 9457 cd/sqm



TEST NUMBER: P763186

CATALOG NUMBER: LD6D25D010-EU6DR3520359027-6LBCSSQMW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	631.9	24.6
10°-20°	1233.7	48.1
20°-30°	503.1	19.6
30°-40°	120.4	4.7
40°-50°	50.1	2.0
50°-60°	20.8	0.8
60°-70°	6.5	0.3
70°-80°	0.2	0.0
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2368.7	92.3
0°-40°	2489.1	97.0
0°-60°	2560.0	99.7
0°-90°	2566.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2566.8	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	7063	
5°	6870	632
15°	4660	1234
25°	965	503
35°	178	120
45°	61	50
55°	22	21
65°	6	6
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P763186

CATALOG NUMBER: LD6D25D010-EU6DR3520359027-6LBCSSQMW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	7062.6
2.5°	7020.3
5°	6870.4
7.5°	6571.5
10°	6121.3
12.5°	5487.3
15°	4660.0
17.5°	3648.2
20°	2571.3
22.5°	1639.6
25°	964.8
27.5°	545.4
30°	343.9
32.5°	241.5
35°	178.3
37.5°	137.9
40°	109.0
42.5°	83.9
45°	61.2
47.5°	45.8
50°	35.4
52.5°	28.1
55°	22.3
57.5°	18.1
60°	14.3
62.5°	10.4
65°	6.5
67.5°	2.3
70°	0.4
72.5°	0.4
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.4
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)