

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P763653

Luminaire Tested: LD6D25D010-EU6DR6520359027-6LBCSSQMMS

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P763653
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D25D010-EU6DR6520359027-6LBCSSQMMS
Description: 6 INCH SQAURE SHALLOW CAST MATTE METALLIC SILVER TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2416.4 lumens
Efficiency: N/A
Efficacy: 96.3 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96
Luminous Opening: Circular (Dia: 0.48' x H: 0')
CIE Type: Direct

Input Watts (W): 25.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P763653

CATALOG NUMBER: LD6D25D010-EU6DR6520359027-6LBCSSQMMS

Luminous Intensity Polar Plot

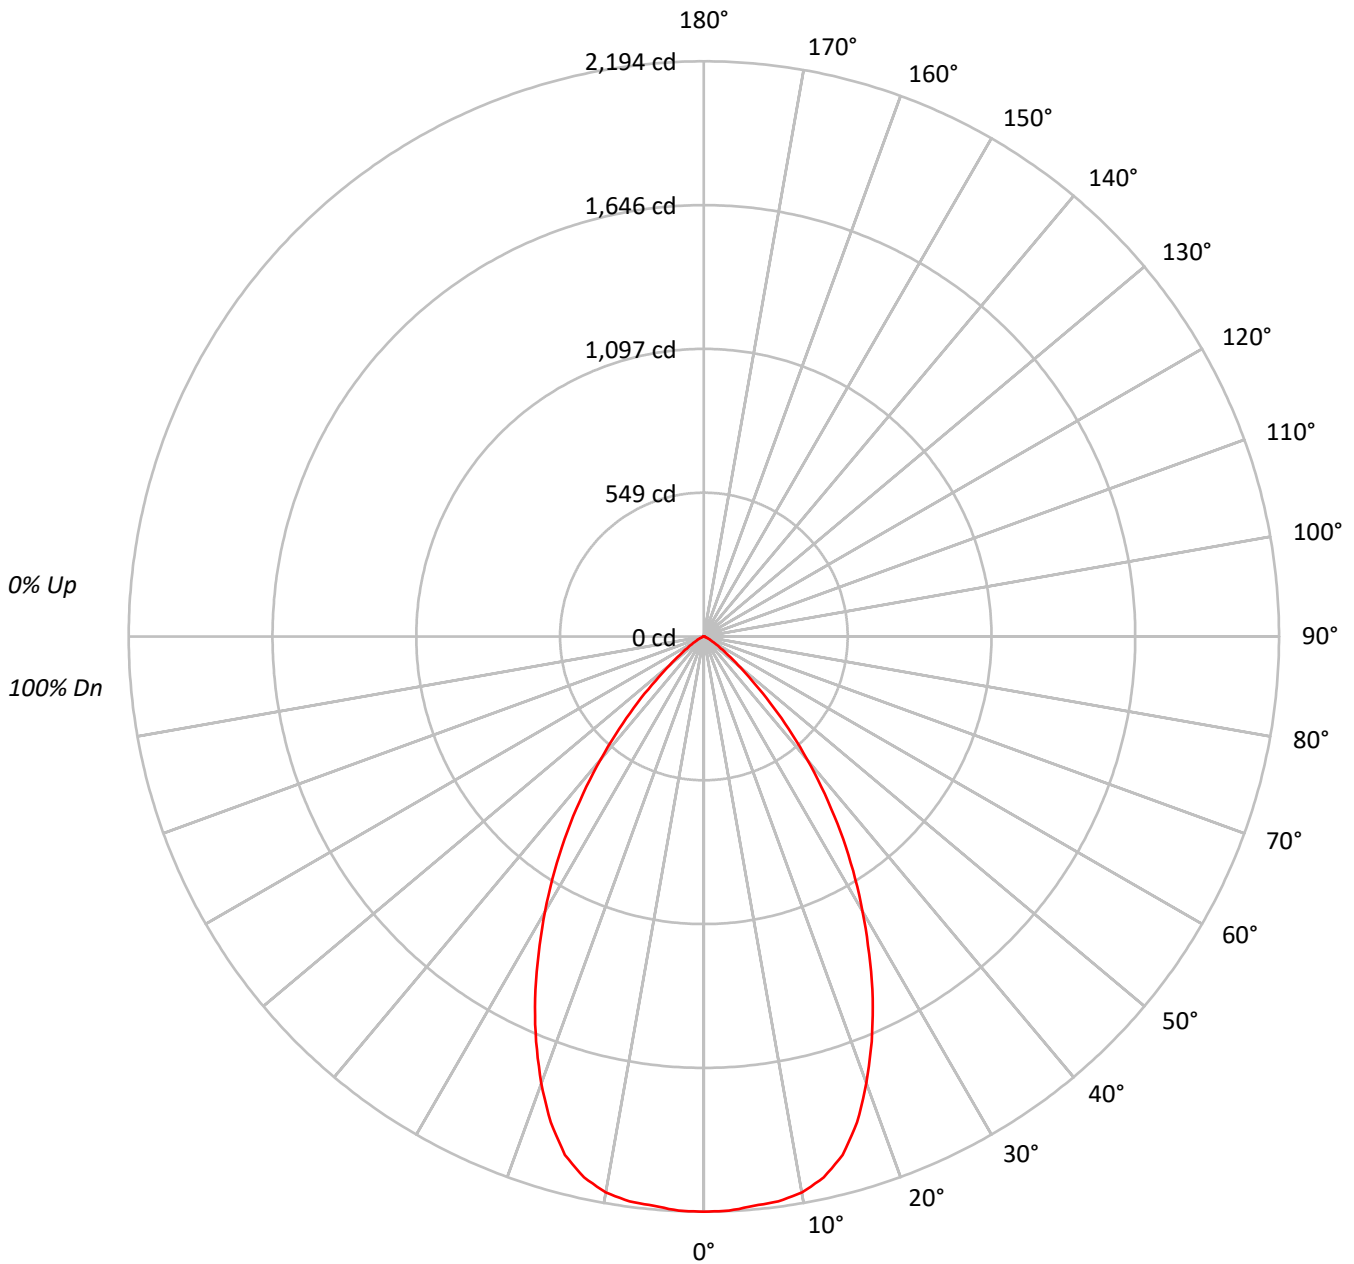



TEST NUMBER: P763653

CATALOG NUMBER: LD6D25D010-EU6DR6520359027-6LBCSSQMMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100															
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93				93															
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85				85															
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78				78															
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72				72															
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66				66															
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61				61															
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56				56															
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52				52															
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49				49															
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46				46															

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	128144
5°	127819
10°	127713
15°	123776
20°	112682
25°	98196
30°	81669
35°	64710
40°	46705
45°	29503
50°	15374
55°	8176
60°	4299
65°	2363
70°	990
75°	1083
80°	740
85°	670

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 29503 cd/sqm



TEST NUMBER: P763653

CATALOG NUMBER: LD6D25D010-EU6DR6520359027-6LBCSSQMMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	207.5	8.6
10°-20°	568.2	23.5
20°-30°	694.5	28.7
30°-40°	563.5	23.3
40°-50°	280.8	11.6
50°-60°	78.3	3.2
60°-70°	17.8	0.7
70°-80°	4.6	0.2
80°-90°	1.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1470.2	60.8
0°-40°	2033.7	84.2
0°-60°	2392.8	99.0
0°-90°	2416.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2416.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2194	
5°	2180	207
15°	2047	568
25°	1524	695
35°	908	564
45°	357	281
55°	80	78
65°	17	18
75°	5	5
85°	1	1
90°	0	



TEST NUMBER: P763653

CATALOG NUMBER: LD6D25D010-EU6DR6520359027-6LBCSSQMMS

CANDELA DISTRIBUTION (FULL):

0°	
0°	2194.1
2.5°	2192.5
5°	2180.2
7.5°	2173.1
10°	2153.5
12.5°	2113.5
15°	2047.1
17.5°	1943.3
20°	1813.0
22.5°	1672.4
25°	1523.8
27.5°	1364.8
30°	1211.0
32.5°	1059.2
35°	907.6
37.5°	756.4
40°	612.6
42.5°	477.8
45°	357.2
47.5°	248.9
50°	169.2
52.5°	116.7
55°	80.3
57.5°	54.1
60°	36.8
62.5°	25.5
65°	17.1
67.5°	8.7
70°	5.8
72.5°	5.5
75°	4.8
77.5°	3.2
80°	2.2
82.5°	1.6
85°	1.0
87.5°	0.6
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)