

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P763221

Luminaire Tested: LD6D25D010-EU6DR3520359035-6LBSQW1B

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P763221  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-20)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D25D010-EU6DR3520359035-6LBSQW1B  
Description: 6 INCH SQAURE DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 35° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2450.0 lumens  
Efficiency: N/A  
Efficacy: 97.6 lumens/watt  
Spacing Criteria (0/90/45): 0.6 / 0.6 / 0.54  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 25.1  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P763221

CATALOG NUMBER: LD6D25D010-EU6DR3520359035-6LBSQW1B

### Luminous Intensity Polar Plot

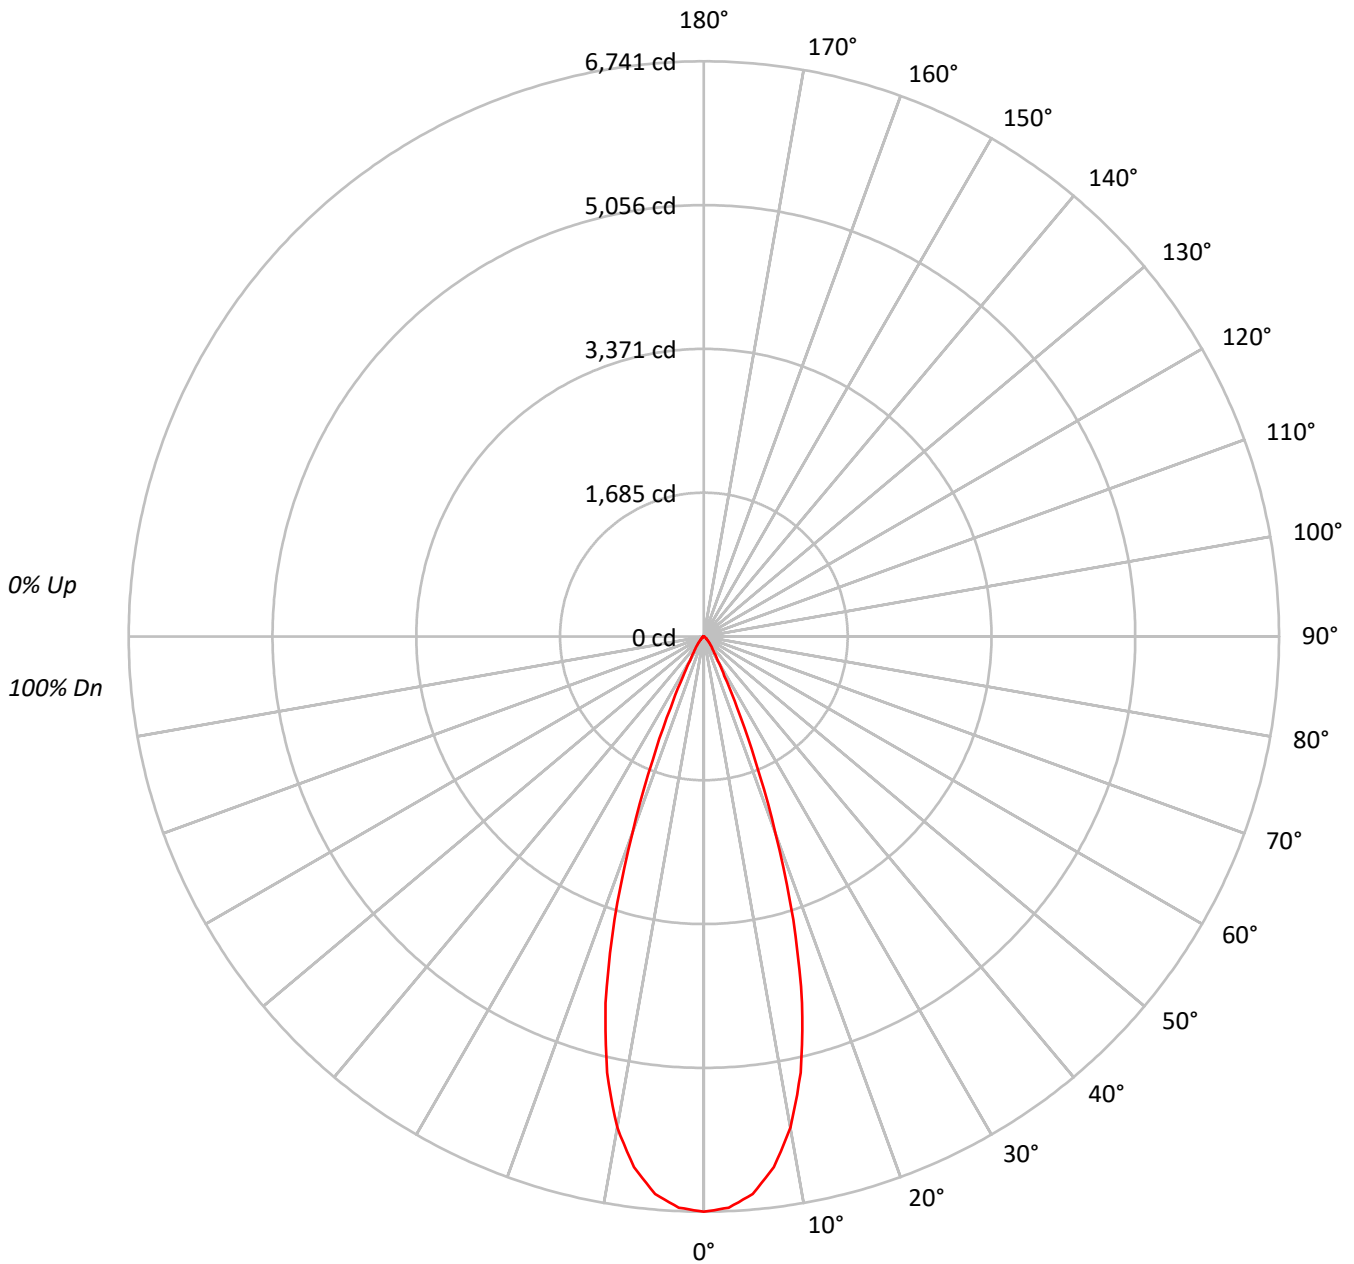



TEST NUMBER: P763221

CATALOG NUMBER: LD6D25D010-EU6DR3520359035-6LBSQW1B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	115	112	110	108	112	110	108	107	106	105	103	103	101	100	99	98	98	96																			
2	110	106	103	101	108	105	102	99	102	99	97	99	97	95	96	95	93	92																			
3	106	101	97	94	105	100	96	94	97	95	92	95	93	91	93	91	89	88																			
4	103	97	92	89	101	96	92	89	94	90	88	92	89	87	90	88	86	84																			
5	99	93	88	85	98	92	87	84	90	86	84	89	85	83	87	84	82	81																			
6	96	89	84	81	94	88	84	81	87	83	80	85	82	80	84	81	79	78																			
7	93	85	81	78	91	85	80	77	84	80	77	83	79	77	82	79	76	75																			
8	90	82	78	74	88	82	77	74	81	77	74	80	76	74	79	76	73	72																			
9	87	79	75	72	86	79	75	72	78	74	71	77	74	71	77	73	71	70																			
10	84	77	72	69	83	76	72	69	76	72	69	75	71	69	74	71	69	68																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	736560
5°	719247
10°	648237
15°	503136
20°	285368
25°	111020
30°	41419
35°	22702
40°	14833
45°	9024
50°	5745
55°	4057
60°	2972
65°	1603
70°	96
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 9024 cd/sqm



TEST NUMBER: P763221

CATALOG NUMBER: LD6D25D010-EU6DR3520359035-6LBSQW1B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	603.1	24.6
10°-20°	1177.6	48.1
20°-30°	480.3	19.6
30°-40°	114.9	4.7
40°-50°	47.9	2.0
50°-60°	19.8	0.8
60°-70°	6.2	0.3
70°-80°	0.1	0.0
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2260.9	92.3
0°-40°	2375.9	97.0
0°-60°	2443.6	99.7
0°-90°	2450.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2450.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	6741	
5°	6558	603
15°	4448	1178
25°	921	480
35°	170	115
45°	58	48
55°	21	20
65°	6	6
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P763221

CATALOG NUMBER: LD6D25D010-EU6DR3520359035-6LBSQW1B

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	6741.3
2.5°	6700.8
5°	6557.8
7.5°	6272.6
10°	5842.8
12.5°	5237.7
15°	4448.0
17.5°	3482.2
20°	2454.3
22.5°	1565.0
25°	920.9
27.5°	520.6
30°	328.3
32.5°	230.5
35°	170.2
37.5°	131.6
40°	104.0
42.5°	80.2
45°	58.4
47.5°	43.8
50°	33.8
52.5°	26.8
55°	21.3
57.5°	17.3
60°	13.6
62.5°	9.9
65°	6.2
67.5°	2.2
70°	0.3
72.5°	0.3
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.3
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)