

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P763299

Luminaire Tested: LD6D25D010-EU6DR4020359035-6LBSQW1B

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P763299  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-28)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D25D010-EU6DR4020359035-6LBSQW1B  
Description: 6 INCH SQAURE DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 40° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2669.7 lumens  
Efficiency: N/A  
Efficacy: 106.4 lumens/watt  
Spacing Criteria (0/90/45): 0.68 / 0.68 / 0.6  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 25.1  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P763299

CATALOG NUMBER: LD6D25D010-EU6DR4020359035-6LBSQW1B

### Luminous Intensity Polar Plot

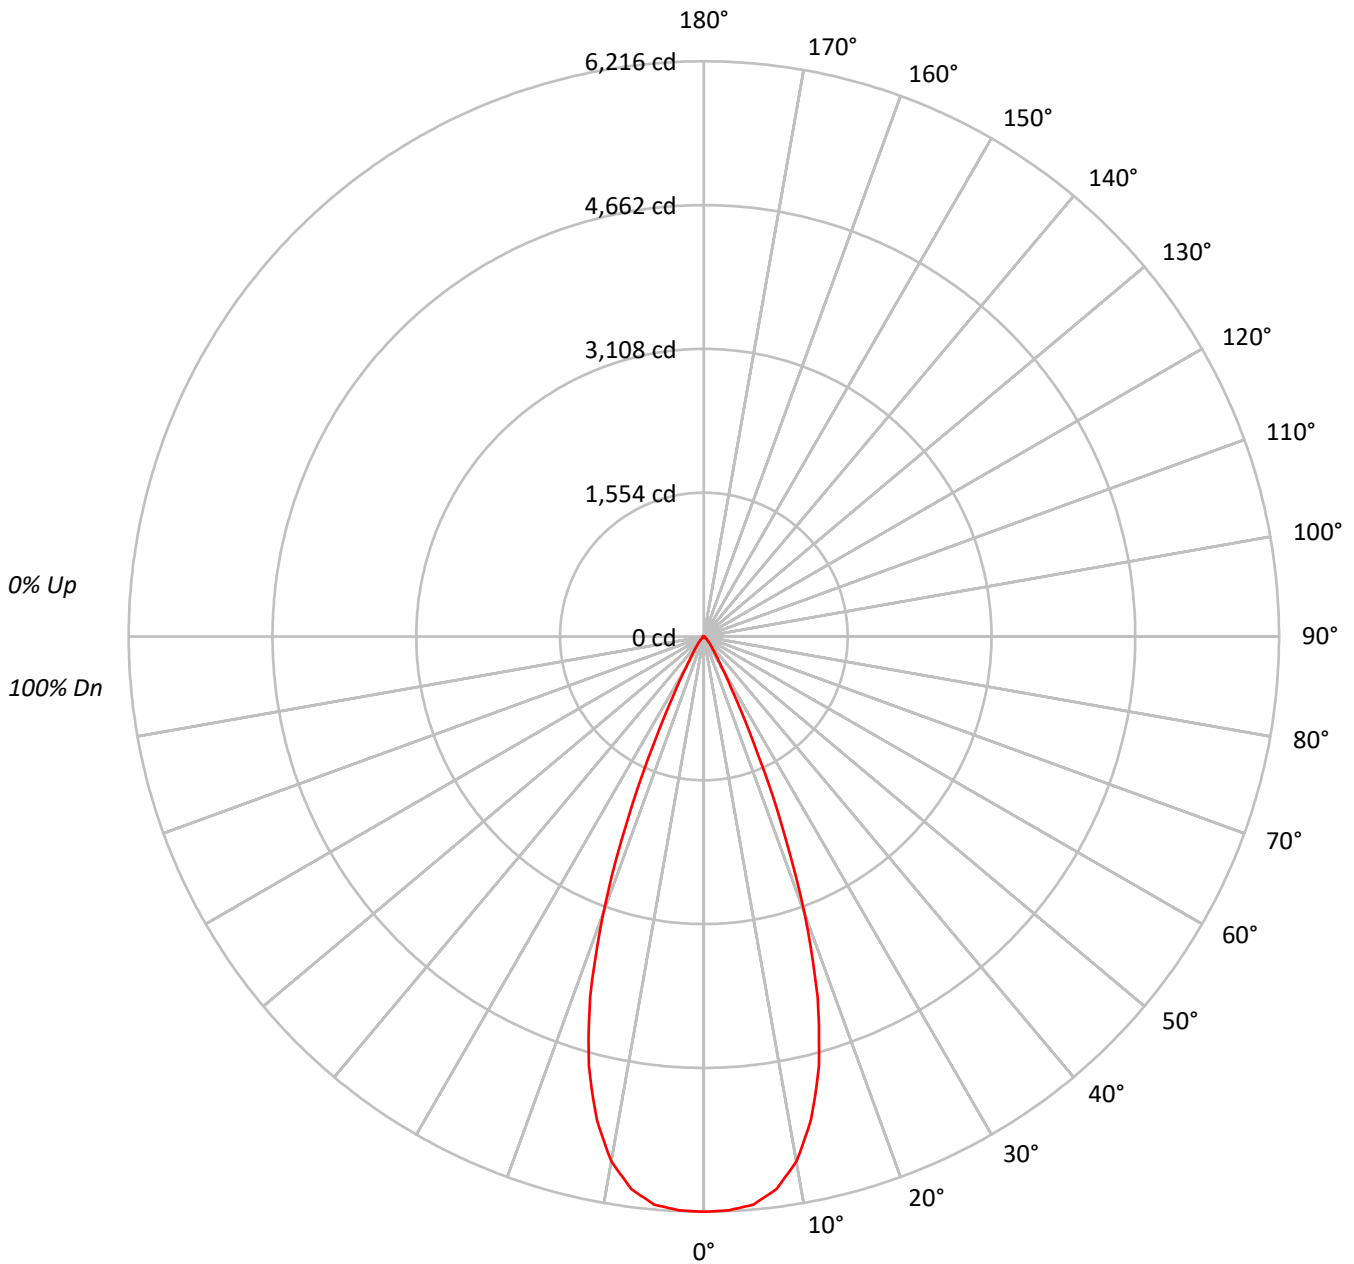



TEST NUMBER: P763299

CATALOG NUMBER: LD6D25D010-EU6DR4020359035-6LBSQW1B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									20																	
RC	80									70									50									30									10									0								
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																								
RCR																																																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																																				
1	115	112	110	108	112	110	108	107	106	105	103	103	101	100	99	98	97	96																																				
2	110	106	103	100	108	105	102	99	102	99	97	99	97	95	96	95	93	92																																				
3	106	101	97	94	104	100	96	93	97	94	92	95	93	90	93	91	89	88																																				
4	102	97	92	89	101	95	91	88	93	90	87	92	89	86	90	87	85	84																																				
5	99	92	88	84	97	91	87	84	90	86	83	88	85	83	87	84	82	81																																				
6	95	88	84	80	94	88	83	80	86	82	80	85	82	79	84	81	79	77																																				
7	92	85	80	77	91	84	80	77	83	79	76	82	79	76	81	78	76	74																																				
8	89	82	77	74	88	81	77	74	80	76	73	79	76	73	78	75	73	72																																				
9	86	79	74	71	85	78	74	71	77	73	71	77	73	70	76	72	70	69																																				
10	83	76	71	68	82	75	71	68	75	71	68	74	70	68	73	70	68	67																																				

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	679165
5°	675869
10°	638840
15°	543099
20°	370155
25°	154444
30°	48560
35°	22568
40°	12480
45°	5717
50°	2771
55°	1524
60°	787
65°	284
70°	96
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 5717 cd/sqm



TEST NUMBER: P763299

CATALOG NUMBER: LD6D25D010-EU6DR4020359035-6LBSQW1B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	575.4	21.6
10°-20°	1289.0	48.3
20°-30°	645.2	24.2
30°-40°	118.3	4.4
40°-50°	32.6	1.2
50°-60°	7.7	0.3
60°-70°	1.5	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2509.7	94.0
0°-40°	2628.0	98.4
0°-60°	2668.2	99.9
0°-90°	2669.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2669.7	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	6216	
5°	6162	575
15°	4801	1289
25°	1281	645
35°	169	118
45°	37	33
55°	8	8
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P763299

CATALOG NUMBER: LD6D25D010-EU6DR4020359035-6LBSQW1B

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	6216.0
2.5°	6206.9
5°	6162.3
7.5°	6019.9
10°	5758.1
12.5°	5349.9
15°	4801.3
17.5°	4087.7
20°	3183.5
22.5°	2170.4
25°	1281.1
27.5°	677.2
30°	384.9
32.5°	248.7
35°	169.2
37.5°	120.9
40°	87.5
42.5°	59.9
45°	37.0
47.5°	23.6
50°	16.3
52.5°	11.6
55°	8.0
57.5°	5.1
60°	3.6
62.5°	2.2
65°	1.1
67.5°	0.7
70°	0.3
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)