

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P763625

Luminaire Tested: LD6D25D010-EU6DR6020359040-6LBSQW1MW

Issue Date: 2/5/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P763625  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-57)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/5/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D25D010-EU6DR6020359040-6LBSQW1MW  
Description: 6 INCH SQAURE DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 60° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2773.0 lumens  
Efficiency: N/A  
Efficacy: 110.5 lumens/watt  
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.83  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 25.1  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P763625  
CATALOG NUMBER: LD6D25D010-EU6DR6020359040-6LBSQW1MW

### Luminous Intensity Polar Plot

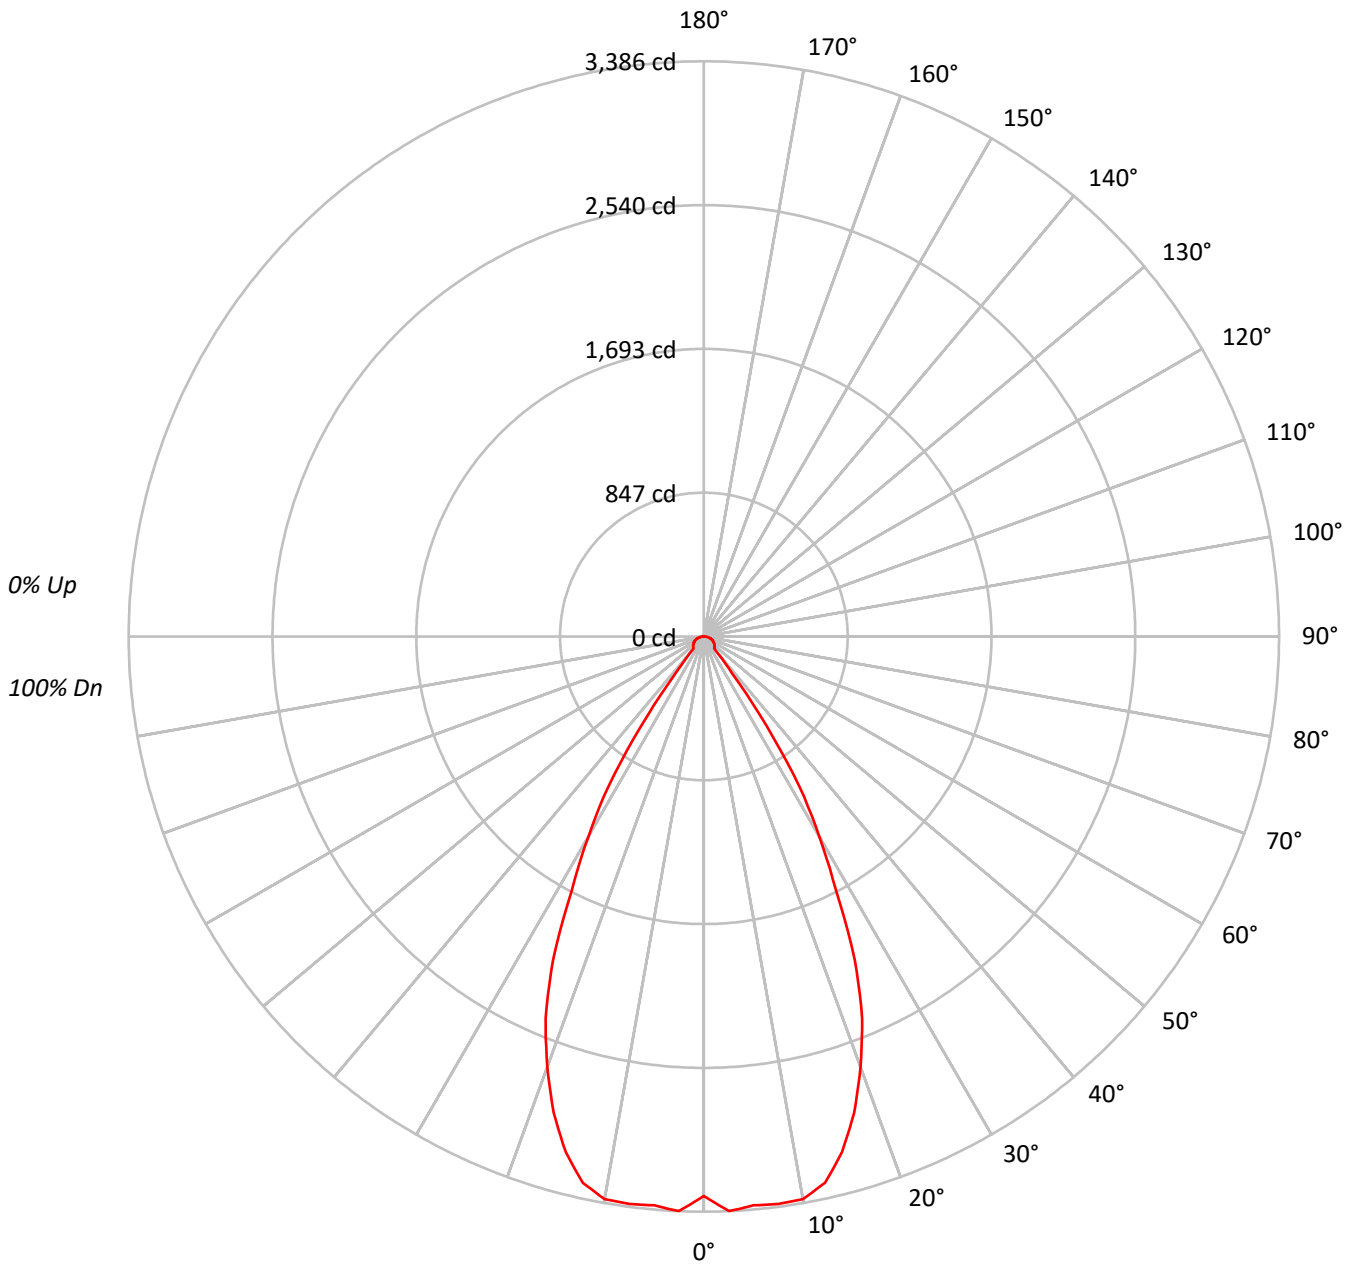



TEST NUMBER: P763625

CATALOG NUMBER: LD6D25D010-EU6DR6020359040-6LBSQW1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93			93																
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86			86																
3	102	96	90	86	100	94	89	86	91	88	84	89	86	83	87	84	82	80			80																
4	97	89	84	80	95	88	83	79	86	82	78	84	80	77	82	79	76	75			75																
5	92	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70			70																
6	88	79	73	69	87	78	73	69	77	72	68	75	71	68	74	70	67	66			66																
7	84	75	69	65	83	74	68	64	73	68	64	72	67	64	71	67	63	62			62																
8	80	71	65	61	79	70	65	61	69	64	60	68	64	60	67	63	60	59			59																
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55			55																
10	73	64	58	54	72	63	58	54	62	58	54	62	57	54	61	57	54	53			53																

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	359828
5°	368672
10°	373123
15°	355453
20°	313402
25°	253493
30°	171456
35°	85925
40°	13935
45°	13644
50°	13921
55°	14115
60°	14510
65°	14840
70°	15206
75°	15366
80°	14786
85°	12411

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 75°  
 Luminance: 15366 cd/sqm



TEST NUMBER: P763625

CATALOG NUMBER: LD6D25D010-EU6DR6020359040-6LBSQW1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	321.3	11.6
10°-20°	869.2	31.3
20°-30°	935.2	33.7
30°-40°	406.5	14.7
40°-50°	68.3	2.5
50°-60°	66.4	2.4
60°-70°	56.8	2.0
70°-80°	38.0	1.4
80°-90°	11.4	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2125.7	76.7
0°-40°	2532.2	91.3
0°-60°	2666.9	96.2
0°-90°	2773.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2773.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3293	
5°	3361	321
15°	3142	869
25°	2103	935
35°	644	407
45°	88	68
55°	74	66
65°	57	57
75°	36	38
85°	10	11
90°	0	



TEST NUMBER: P763625

CATALOG NUMBER: LD6D25D010-EU6DR6020359040-6LBSQW1MW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	3293.3
2.5°	3385.9
5°	3361.4
7.5°	3369.1
10°	3363.1
12.5°	3293.7
15°	3142.4
17.5°	2939.2
20°	2695.4
22.5°	2434.4
25°	2102.7
27.5°	1681.8
30°	1359.0
32.5°	1047.5
35°	644.2
37.5°	275.6
40°	97.7
42.5°	90.0
45°	88.3
47.5°	85.3
50°	81.9
52.5°	78.0
55°	74.1
57.5°	70.3
60°	66.4
62.5°	62.2
65°	57.4
67.5°	52.7
70°	47.6
72.5°	42.0
75°	36.4
77.5°	30.0
80°	23.5
82.5°	16.7
85°	9.9
87.5°	3.4
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)